4er 2x2 fence mailbox freestanding design BASIC Plus 381XZ ST-R - polished stainless steel | with 4 letterboxes (2x2) | Stainless steel, ground

Product number 381XZ-VA-4



Product description

4er 2x2 fence mailbox freestanding design BASIC Plus 381XZ ST-R - polished stainless steel

High-quality free-standing fence mailbox for 4 parties made in Germany by Briefkasten Manufaktur.

The letter box is made entirely of stainless steel V2A 1.4301, 240 grain polished. The very high-quality workmanship and the well thought-out concept make this free-standing letter box our top seller. A rain drainage edge for optimum water protection, a continuous rubber lip for quiet insertion, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this free-standing letterbox. The side panelling with protruding rain cover made of V2A stainless steel offers optimum protection against the weather and guarantees a very long service life.

The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- 4-post letterbox made of stainless steel V2A 1.4301, 240 grain polished
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letterboxes comply with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flap with sound-absorbing rubber seal for very quiet mail insertion.
- The door can be opened from left to right.
- Incl. 2 keys with key number, interchangeable nameplate (type 2) under the flap and post holder.
- Incl. side panelling + rain cover made of stainless steel V2A 1.4301, 240 grain polished.
- The stand elements are made of 42.4 mm V2A stainless steel 1.4301, polished for screw mounting or setting in concrete.

Important information:

The post is only protected from moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water can still get in (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110

Product properties

Series	BASIC
Boxes by volume	Normal > 10 litres
Number of boxes	with 4 letterboxes
Name labelling	Nameplate
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301
Surface/colour	Brushed
Removal of mail	On the back

Dimensions

Width of single box in mm355,0Capacity in litres12Height of letterbox slot in mm35,0Width of letter slot in mm325,0Height of letterbox in mm660,0Width of letterbox system in mm710,0Overall height in mm1200,0 1500,0
Height of letterbox slot in mm35,0Width of letter slot in mm325,0Height of letterbox in mm660,0Width of letterbox system in mm710,0
Width of letter slot in mm325,0Height of letterbox in mm660,0Width of letterbox system in mm710,0
Height of letterbox in mm660,0Width of letterbox system in mm710,0
Width of letterbox system in mm 710,0
Overall height in mm $1200.0 \mid 1500.0$
Total width in mm 885,0
Depth in mm 100.0 + 24.0 Rain roof
Weight in kg 28
Delivery condition Supplied in blocks, stand elements / letterbox divided


Briefkasten Manufaktur Lippe GmbH Werler Straße 60 32105 Bad Salzuflen www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110



Drawing



Montagebohrungen

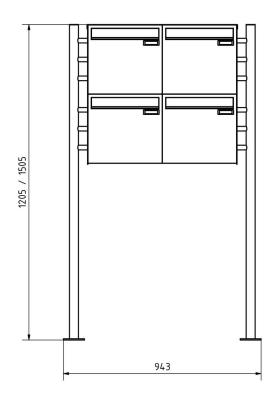



Briefkasten Manufaktur Lippe GmbH Werler Straße 60 32105 Bad Salzuflen www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110



More images



www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110





www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110





www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110