

Stainless steel fence letterbox BASIC Plus 382XZ with newspaper compartment & bell box - removal from the rear | Stainless steel, ground

Product number 382XAZ-VA-1-SP-ZFG



Product description

Stainless steel fence letterbox BASIC Plus 382XZ with closed newspaper compartment & bell box for intercom - polished stainless steel - rear removal

High-quality fence letterbox from Briefkasten Manufaktur with bell box for intercom (optional camera) and closed newspaper compartment, operated with a toggle lock. The post is inserted from the front and residents can remove the post from the back. The letterbox can be attached to your fence using the optional bar mat fastening; if this is not selected, the letterbox should be fitted and perforated on site by your fence builder. The complete fence letterbox is made of weather-resistant stainless steel V2A 1.4301, 240 grain polished. A rain drainage edge for optimum water protection, a throw-in flap with rubber buffer, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this stainless steel letterbox.

The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- Fence letterbox made of stainless steel V2A 1.4301, 240 grain polished.
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- Newspaper compartment with door and toggle lock made of stainless steel V2A 1.4301, 240 grain polished. Dimensions: 355x165x100mm. Laser inscription in grey "ZEITUNG".
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flap with sound-absorbing rubber seal for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, interchangeable nameplate (type 2) under the flap and post holder.
- Incl. side panelling + rain cover made of stainless steel V2A 1.4301, 240 grain polished.
- **Intercom bell part made of stainless steel V2A 1.4301, 240 grain polished**
- Intercom perforation with universal adapter. (Intercom system/ built-in loudspeaker not included in scope of delivery). Also available without speech perforation.
- Universal adapter is suitable for all commercially available built-in loudspeakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism - The nameplate is indentation-proof and impact-resistant, the plastic is flame-retardant.
- Suitable for fence mounting, fixing holes must be drilled on site. Optionally with bar mat holder.

Important information:

The post is only protected from moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water may still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.


Product properties

Series	BASIC
Functions	Newspaper compartment, Light button, Camera, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Material	Stainless steel V2A 1.4301
House number	House number as laser engraving
Mounting type	Fence
Number of boxes	with 1 letterbox
Surface/colour	Brushed
Removal of mail	On the back

Dimensions

Height of single box in mm	330,0
Width of single box in mm	355,0
Capacity in litres	12
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	595,0
Width of letterbox system in mm	355,0
Depth in mm	100.0 + 24.0 Rain roof
Weight in kg	11

Drawing

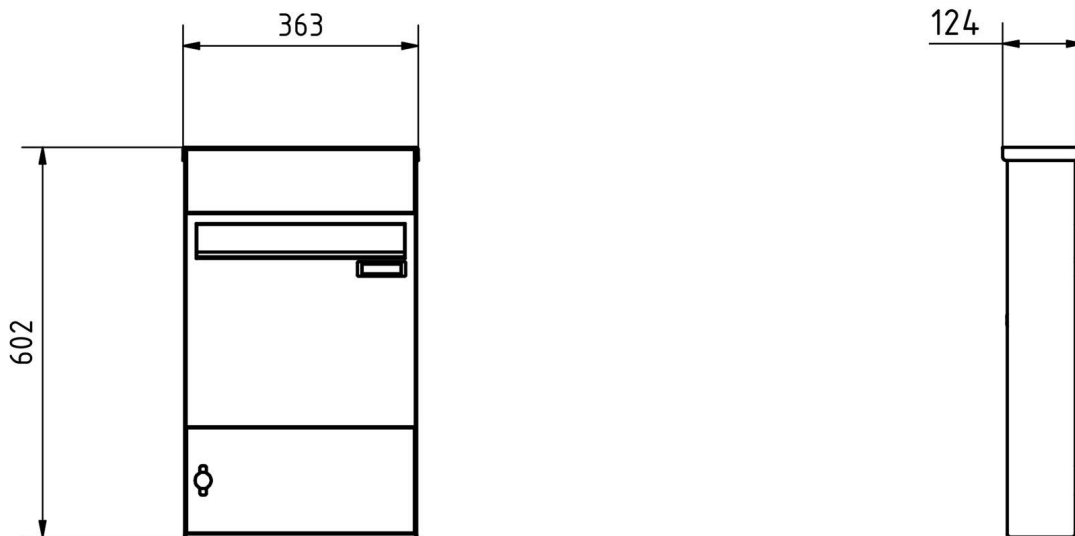

More images

