

Free-standing fence letterbox Design BASIC Plus 381XZ ST-R with bell box - polished stainless steel | Bottom | Stainless steel, ground | with 1 letterbox

Product number 381XZ-VA-1-SP-U



Product description

Free-standing fence letterbox Design BASIC Plus 381XZ ST-R with bell box for intercom - polished stainless steel - removal from the rear

High-quality fence letterbox including bell box made in Germany by Briefkasten Manufaktur.

The successful BASIC collection as a fence letterbox. Mail is inserted from the front, residents can remove the mail from the back.

The letterbox is made entirely of stainless steel V2A 1.4301, 240 grain polished. The very high-quality workmanship and the well thought-out concept make this free-standing letter box our top seller. A rain drainage edge for optimum water protection, a continuous rubber lip for quiet insertion, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this free-standing letterbox. The side panelling with protruding rain cover made of V2A stainless steel offers optimum protection against the weather and guarantees a very long service life.

The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- Free-standing fence letterbox made of stainless steel V2A 1.4301, 240 grain polished
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letter box complies with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flap with sound-absorbing rubber seal for very guiet mail insertion.
- Mail is inserted from the front and removed from the back.
- The door can be opened from left to right.
- Incl. 2 keys with key number, interchangeable nameplate (type 2) under the flap and post holder.
- Incl. side panelling + rain cover made of stainless steel V2A 1.4301, 240 grain polished.
- Bell box made of stainless steel V2A 1.4301, 240 grain polished
- Intercom perforation with universal adapter. (Intercom system/ built-in loudspeaker not included in the scope of delivery). Also available without speech perforation.
- Universal adapter is suitable for all commercially available built-in loudspeakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism The nameplate is indentation-proof and impact-resistant, the plastic is flame-retardant.
- Cable access: Ø 14.0 mm (right-hand side). Invisible cable routing through the stand element.
- The stand elements are made of 42.4 mm V2A stainless steel 1.4301, polished for screw mounting or setting in concrete.

Important information



Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

The mail is only protected against moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water may still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

Product properties

Series BASIC

Boxes by volume Normal > 10 litres

Name labelling Nameplate

Mounting type Free-standing

Material Stainless steel V2A 1.4301

House number House number as laser engraving

Number of boxes with 1 letterbox Surface/colour Brushed Removal of mail On the back

Dimensions

Height of single box in mm330,0Width of single box in mm355,0Capacity in litres12Height of letterbox slot in mm35,0Width of letter slot in mm325,0Height of letterbox in mm430,0Width of letterbox system in mm355,0

Overall height in mm 1200,0 | 1500,0

Total width in mm 535,0

Depth in mm 100.0 + 24.0 Rain roof


Weight in kg 13


Delivery condition Supplied in blocks, stand elements / letterbox divided




Drawing

Montagebohrungen



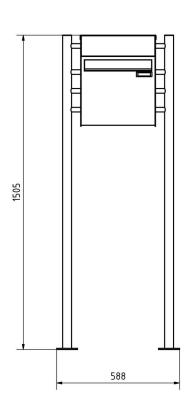





More images











