

Video door station DIVISION 530S - RAL colour with stainless steel application - Comelit Ultra VIDEO complete set Wifi

Product number 530S-ES-KSCSWIFI-1



Product description

Video door station DIVISION 530S - RAL colour with stainless steel application - Comelit Ultra VIDEO complete set Wifi

The DIVISION 530S video call station is the perfect combination of state-of-the-art door communication, high-quality design and maximum ease of use. The elegant front made of powder-coated stainless steel in the colour of your choice blends seamlessly into any building façade, while the elegant stainless steel application with white illuminated bell push sets a stylish accent. The high-quality finish in V2A stainless steel makes the system particularly robust, durable and weather-resistant - ideal for long-term outdoor use.

Equipped with the innovative Comelit doorbell with camera, you can experience razor-sharp live images, a generous wide angle, face recognition and voice control. The doorbell can be conveniently operated using a mobile phone: you can receive visitor calls directly on your smartphone via the free Comelit app, see the camera image in real time, speak to guests and even open doors or gates if you wish - no matter where you are.

Thanks to modern 2-wire technology, installation is particularly easy and ideal for new builds, conversions or renovations. Existing doorbell lines can continue to be used without the need for time-consuming plastering or painting work. The pre-programmed delivery ensures that your new video call station is quickly ready for use - simply connect and start.

With the DIVISION 530S video call station, you are opting for a flexible, modular system in which front panels and camera modules can be easily replaced even years later. This means your door communication is always up to date - both technically and visually.

- Door station made of 2 mm stainless steel V2A 1.4301.
- Interchangeable front panels powder-coated in RAL colour of your choice.
- Front panel with bell button in V2A stainless steel 1.4301, 240 grit polished.
- Installation box made of 2 mm stainless steel V2A 1.4301, 240 grit polished.
- Doorbell plate dimensions: W 160 mm x H 260 mm x D 8 mm.
- Installation box dimensions: W 130 mm x H 230 mm x D 50 mm.
- Optionally for flush mounting or surface mounting.
- 8-12V DC short-stroke bell push-button with LED ring lighting in white.
- Wide-angle colour camera with 1288 x 968 pixel resolution.
- Detection angle: 120° horizontal, 90° vertical.
- Omnidirectional digital microphone and two loudspeakers for hi-fi audio quality.
- Twilight sensor for automatic lighting control.
- Visual and acoustic indicators for barrier-free use.
- Integrated door opener function (load capacity up to 3 A) with additional relay contacts up to 10 A.
- Including power supply unit Art. 1209.

2-wire technology - your advantages at a glance

- **Simple installation:** Use of existing bell lines - no costly rewiring or construction work.
- **High security against hacking & burglary:** Closed line structure without direct internet connection, protects against unauthorised access and manipulation.
- **No more differences in quality:** HD video, clear sound and stable connection at IP level.
- **Cost-efficient & future-proof:** Lower installation costs, low maintenance, modularly expandable.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection, the door station should be located under a canopy if possible.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), Brushed, RAL 9007 grey aluminium, RAL 9016 traffic white
Series	DIVISION
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Material	Stainless steel V2A 1.4301
House number	House number as laser engraving
Name labelling	Laser-engraved
Mounting type	Surface-mounted, Flush-mounted

Dimensions

Width in mm	130 160
Height in mm	230 260
Depth in mm	52,0
Weight in kg	4
Delivery condition	Delivery is assembled

Drawing

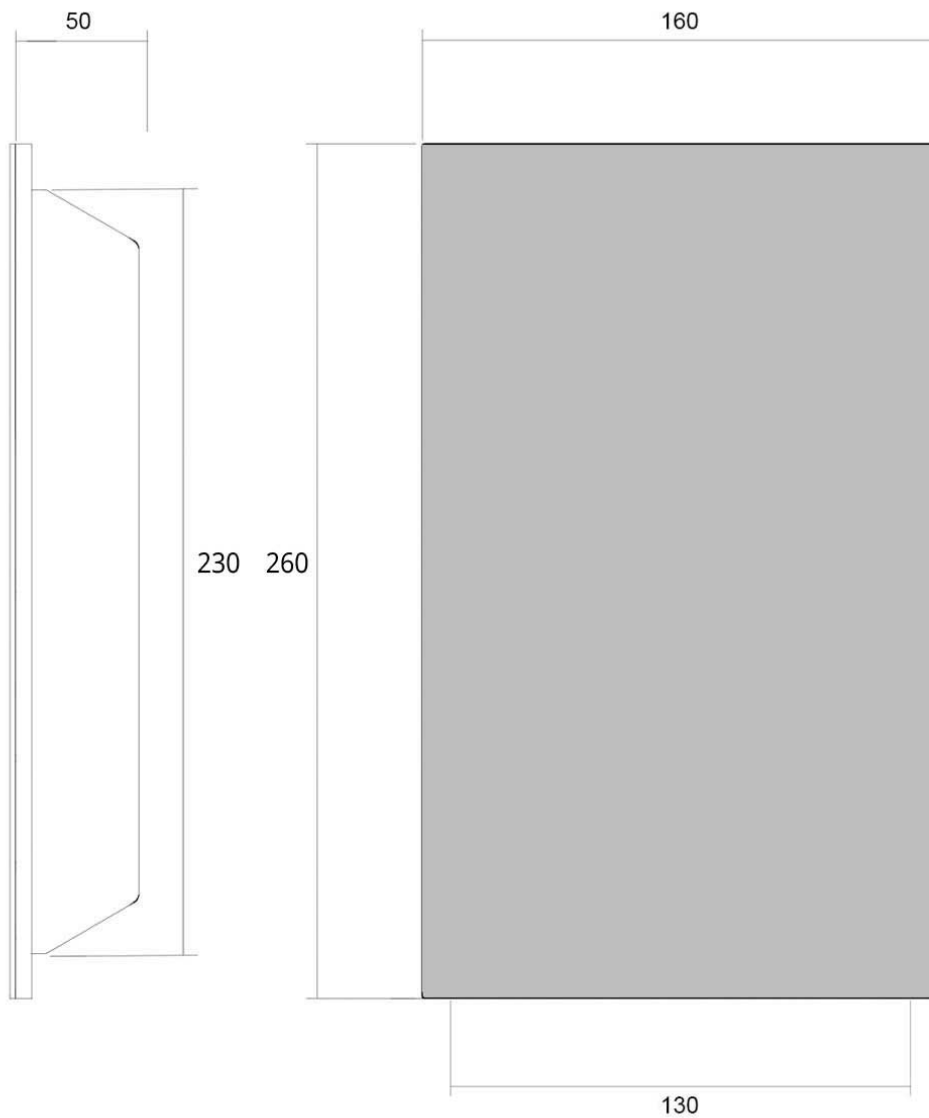

More images

