

# Design flush-mounted door station GOETHE UP with DoorBird video intercom - RAL of your choice

Product number 215-SP-UP-1-DB



## Product description

### Design flush-mounted door station GOETHE UP with DoorBird video intercom - RAL of your choice

High-quality door station with a seamlessly integrated DoorBird IP video door station D2100E or D1100E in flush-mounted design. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your entrance door. The IP video door station can be operated as a stand-alone unit or integrated into an existing smart home platform. Existing, classic installations such as a door chime or an electric door and gate opener can also continue to be used with DoorBird and controlled via the app.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

#### Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- Flush-mounted door station made entirely of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Functional box (BH 200x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Panel opens from top to bottom.
- With name inscription either laser engraved or engraved through (illuminated).
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Incl. DoorBird IP video door station D2100E or D1100E installed.

## Important information

Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GOETHE
<b>Connection technology</b>	LAN
<b>Number of bell push buttons</b>	1 button
<b>Functions</b>	Camera, Intercom
<b>Functional box prepared for manufacturer</b>	DoorBird
<b>Material</b>	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
<b>Name labelling</b>	Laser-engraved
<b>Mounting type</b>	Flush-mounted

## Dimensions

<b>Width in mm</b>	Outer dimension 250   installation dimension 203
<b>Height in mm</b>	External dimension 450   installation dimension 403
<b>Overall height in mm</b>	recommended 1500.0 - 1700.0
<b>Total width in mm</b>	Außenmaß 250   Einbaumaß 220
<b>Depth in mm</b>	100.0   installation dimension 98.5
<b>Weight in kg</b>	5
<b>Delivery condition</b>	Delivery is assembled

Drawing

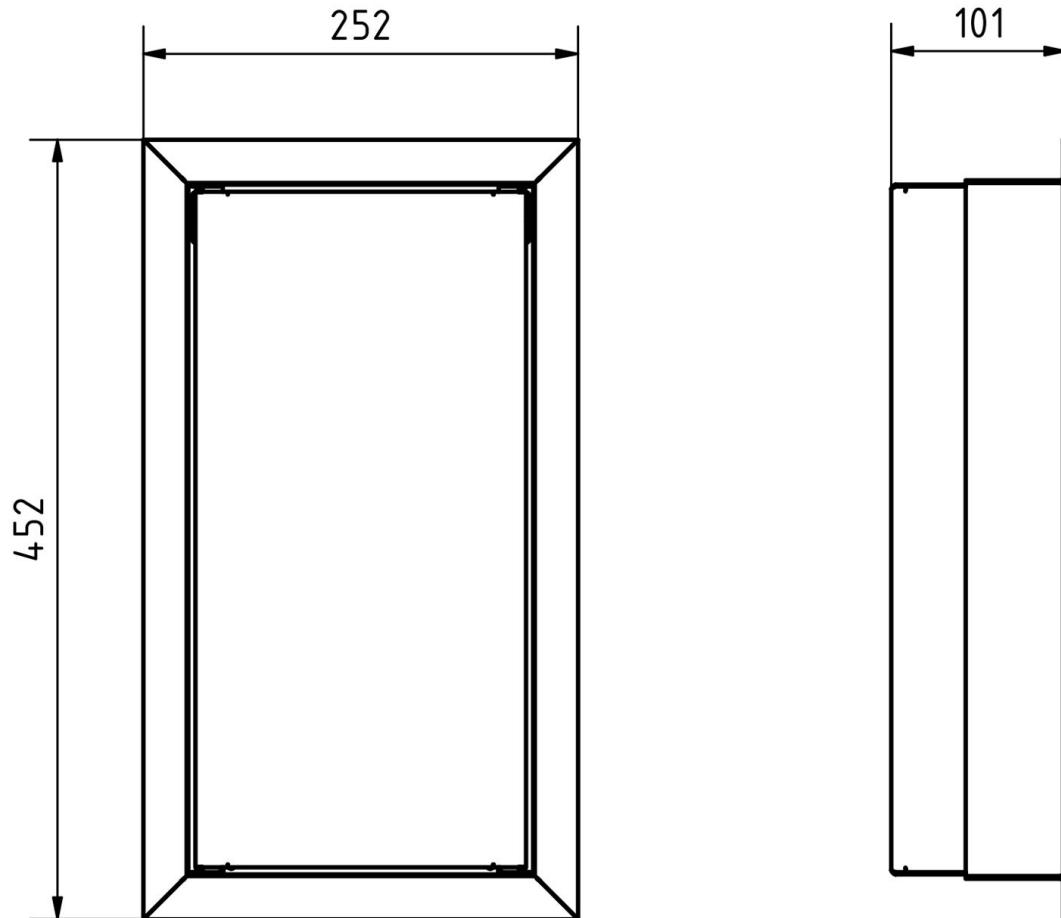

## More images

