


# Stainless steel intercom for flush-mounting - GIRA System 106 - 1-gang - RAL of your choice | Gira System 106 complete set audio | ? Colour of your choice

**Product number** 527-R-UP-1-KSAGI106

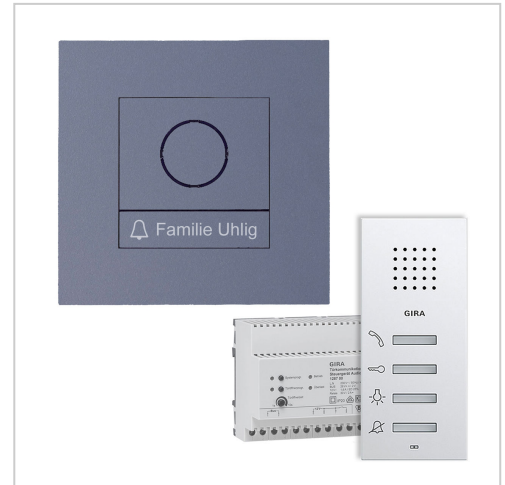

## Product description

### Stainless steel intercom for flush mounting - GIRA System 106 - 1-gang - RAL of your choice

Intercom system for flush-mounted installation of the GIRA System 106. Seamlessly integrated Gira System 106 in flush-mounted design. 1 GIRA system module is included, so the intercom can be used directly. The matching GIRA home station and the control unit to complete this intercom set are included.

- Front panel made of 2 mm stainless steel V2A \_1.4301, powder-coated in RAL colour of choice.
- Invisible fixing with bolts on the back.
- Recommended cut-out dimensions: H 143mm x W 143mm x D 50mm.
- Incl. GIRA home station & control unit enclosed, System 106 door station module installed.

#### Gira System 106 door station module - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with power via the door station module.

#### Surface-mounted home station Gira 1250XX, enclosed

- Completely pre-assembled surface-mounted home station for quick and clean installation.
- Design diversity through integration into the switch range, resulting in a uniform appearance of door communication and electrical installation.
- Installation both with and without cover frame.
- Simple installation thanks to plug-in screw terminals on the mounting plate. Contact is made to the home station when the home station is plugged onto the mounting plate.
- Easy removal of the home station during renovation work.
- Fixing holes for mounting.
- Signal transmission and power supply to the home station via reverse-polarity protected and short-circuit-proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Ring tone differentiation between door call, internal call and storey call.
- Choice of five different ring tone melodies that can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise cancellation).
- Enforcement function for loud ambient noise during voice communication.
- Listen-in blocking.
- Operating buttons with integrated LEDs for status display.

Audio REG control device Gira 128700, enclosed

- Supply of the reverse-polarity protected and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door release programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for the power supply of a standard electric strike.
- Permanent AC 12 V output for supplying power to a DCS-TC gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

## Important information

Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

## Product properties

|                                          |                                                                                                                                                                                        |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Surface/colour                           | RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white |
| Connection technology                    | 2-wire                                                                                                                                                                                 |
| Number of bell push buttons              | 1 button                                                                                                                                                                               |
| Functions                                | Camera, Intercom                                                                                                                                                                       |
| Functional box prepared for manufacturer | GIRA                                                                                                                                                                                   |
| Material                                 | Stainless steel V2A 1.4301                                                                                                                                                             |
| Mounting type                            | Flush-mounted                                                                                                                                                                          |

## Dimensions

|                    |                       |
|--------------------|-----------------------|
| Width in mm        | 190                   |
| Height in mm       | 190                   |
| Total width in mm  | 190                   |
| Depth in mm        | 20,0                  |
| Delivery condition | Delivery is assembled |

## More images

