

Stainless steel doorbell pedestal Designer - RAL of your choice - GIRA System 106 - 5-gang prepared | without | Gira System 106 1x5 prepared | 160 cm | ? Colour of your choice

Product number 870-VAR-V-GI106-160



Product description

Stainless steel doorbell pillar designer - RAL of your choice - GIRA System 106 - 5-gang prepared

High-quality doorbell pillar from the Briefkasten Manufaktur brand. The Gira System 106 can be used seamlessly in a flush-mounted design. The preparation is intended for 5 GIRA 106 system modules. The modules can be flush-mounted using the simple mounting system (surface-mounted housing 5505910 required!).

This is a real eye-catcher among the technical pedestals. Clear lines and no-frills design characterise the designer collection with GIRA System 106. Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Doorbell pillar made of 1.5 mm stainless steel V2A, powder-coated in RAL colour.
- The speech part is made of 2 mm stainless steel V2A 1.4301, powder-coated in RAL colour. Dimensions: W 190 mm x H 640 mm x D 110 mm.
- Incl. 6x screw cover caps made of V2A stainless steel, polished so that the screws for fastening the front panel are not visible. See pictures.
- The fully welded pedestal is made of 1.5 mm stainless steel V2A 1.4301, powder-coated. Construction height is either 1.30 m or 1.60 m.
- The pedestal is fitted with a VA base plate. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body possible.
- **WITHOUT GIRA system components!**

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to penetrate the letterbox. It is therefore necessary to plan sufficiently dimensioned letterboxes for the upcoming requirements. Under certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GRIMM
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301

Dimensions

Height of single box in mm	640,0
Width of single box in mm	190,0
Overall height in mm	1300,0 1600,0
Total width in mm	220.0 (foot plate 320.0)
Depth in mm	110.0 (foot plate 210.0)
Weight in kg	40
Delivery condition	Delivery is assembled

Drawing

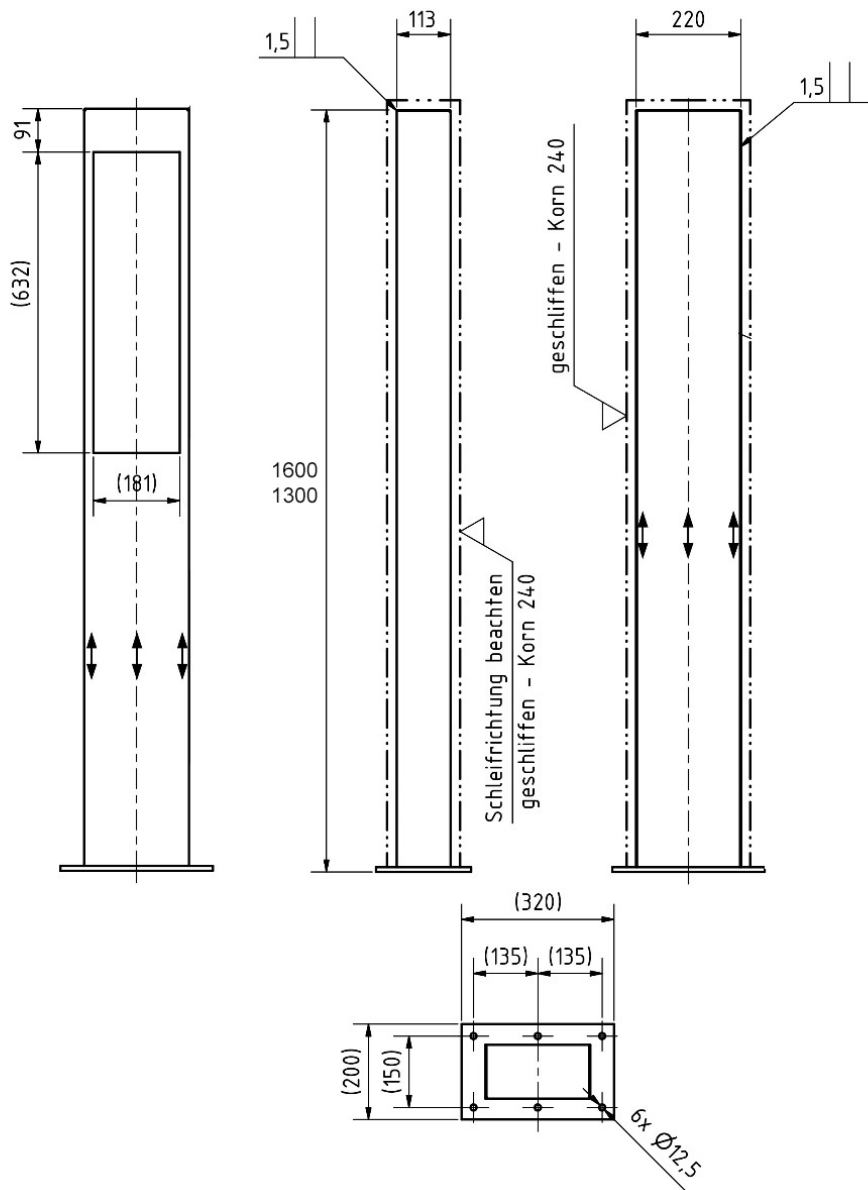

More images

