


GOETHE MDW design letterbox - RAL of your choice - COMELIT Switch - VIDEO complete set Wifi | 300-390mm depth

Product number 215-MDW-1-SP-KSCSWIFI-390

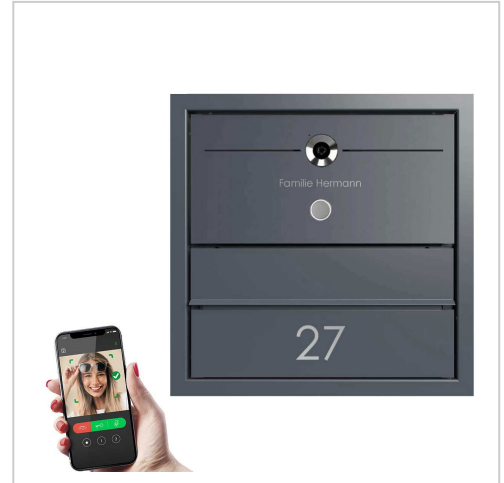

Product description

GOETHE MDW design mailbox - RAL of your choice - COMELIT Switch - VIDEO complete set

The modern GOETHE wall letterbox with doorbell intercom is ideal for the sophisticated entrance area. The linear design makes this letterbox look particularly elegant. Thanks to the variable shaft length between 300mm and 390mm or 390mm to 560mm, this letterbox can be used in almost all types of masonry. discover the fully integrated Comelit VIDEO complete set, a top solution in the world of video intercom systems. This state-of-the-art system offers advanced functions, including face recognition, voice control and convenient operation via smartphone app. Perfectly pre-programmed, it is easy to install - just connect two wires and the system is ready to go! Depending on your needs, the set is available either with a gateway without a home station (home stations can be optionally extended) or with a WiFi-enabled home station to ensure maximum flexibility and customisation to your individual requirements.

The dimensions of the individual boxes allow for a capacity of approx. 24-44 litres, while the large slot guarantees no crumpled mail, even with DIN C4 envelopes and magazines or after several days of absence. Thanks to the water drainage edge, the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- High-quality, stainless steel letterbox.
- Shaft made of 1.4016 stainless steel (magnetic stainless steel), bright.
- Body made of stainless steel 1.4016 (stainless magnetic stainless steel), powder-coated in RAL colour of your choice.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, large letters also fit in here without creasing.
- Letter slot & removal door made of stainless steel V2A 1.4301, powder-coated in RAL colour of your choice.
- Letters are inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- Removal door opens from top to bottom. This prevents the mail from falling towards you.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (rustproof magnetic stainless steel), powder-coated in RAL colour of your choice.
- 8-12V DC short-stroke bell push-button with white LED ring lighting.
- Optionally with name labelling approx. 10-20mm high.
- Optionally with house number labelling approx. 60-80mm high.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Variable shaft length 300-390mm or 390-560mm. External dimensions of letter slot W 380 mm x H 180mm.
- External dimensions front W 450mm x H 450mm; rear W 450mm x H 250mm.

Important information:

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	Comelit
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Number of letterboxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Wall throw-through
Removal of mail	On the back

Dimensions

Height of single box in mm	200,0
Width of single box in mm	400,0
Capacity in litres	24,0 - 32,0 32,0 - 44,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Overall height in mm	recommended 1400.0 - 1600.0
Total width in mm	450,0
Depth in mm	BK 300.0 - 390.0 BK 390.0 - 560.0 FK 100.0
Weight in kg	21
Delivery condition	Supplied partially disassembled

Drawing

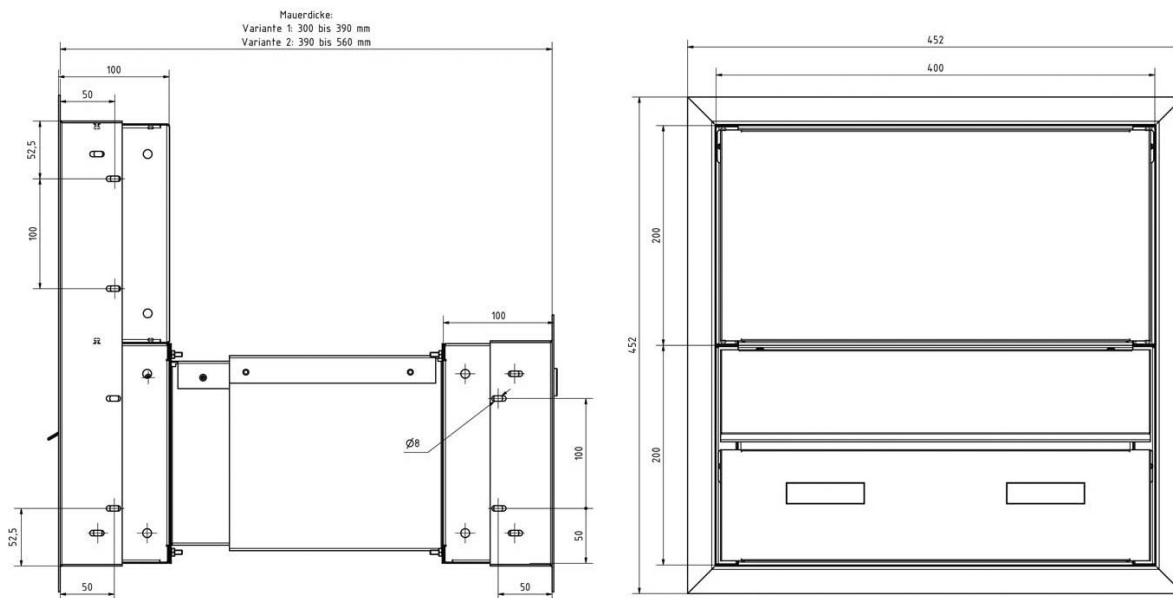

More images

