


# Stainless steel wall-mounted letterbox designer model - RAL of your choice - GIRA System 106 - 3-gang prepared | ? RAL of your choice

**Product number** 515DW-R-V-GI106-RAL

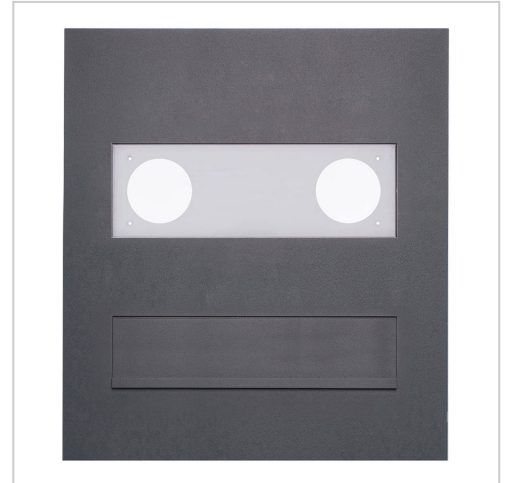

## Product description

### Stainless steel wall-mounted throw-through letterbox designer model - RAL colour - GIRA System 106 - 3-gang prepared

High-quality, through-the-wall letterbox from Briefkasten Manufaktur. Due to the variable shaft length between 270mm and 400mm, this letterbox can be used in almost all masonry. The post is removed from the rear. The front and rear stainless steel plates made of 2mm stainless steel V2A, powder-coated to RAL colour fine structure matt, can be invisibly attached to the wall thanks to the screw connection on the inside of the shaft. No fixing screws are visible.

The Gira System 106 can be used seamlessly in a flush-mounted design. The preparation is intended for 3 GIRA 106 system modules. The modules can be flush-mounted using the simple mounting system (surface-mounted housing 5503910 required!).

This is a real eye-catcher among letterboxes. Clear lines and no-frills design characterise the designer letterbox with GIRA System 106. Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Designer stainless steel pass-through letterbox made of 2 mm stainless steel V2A, powder-coated to RAL colour fine structure matt.
- Rear mail removal door 300x100mm, opens from left to right. Incl. 2 keys with key number.
- Mail slot from the front, dimensions: W 32 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without creasing. Attention no removal protection!
- Dimensions front panel W 450mm x H 500mm.
- Cover plate dimensions with removal door W 450mm x H 250mm.
- Dimensions of letter chute W 380 mm x H 210-280mm.
- Variable shaft length 270-400mm.
- WITHOUT GIRA system components!

## Important information

Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to penetrate the letterbox. It is therefore necessary to plan sufficiently dimensioned letterboxes for the upcoming requirements. In certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GRIMM
<b>Functions</b>	Newspaper compartment
<b>Functional box prepared for manufacturer</b>	GIRA
<b>Material</b>	Stainless steel V2A 1.4301
<b>Number of boxes</b>	with 1 letterbox
<b>Boxes by volume</b>	Jumbo > 30 litres, Large > 16 litres
<b>Mounting type</b>	Wall throw-through
<b>Removal of mail</b>	On the back

## Dimensions

<b>Capacity in litres</b>	21,0   31,0
<b>Height of letterbox slot in mm</b>	63,0
<b>Width of letter slot in mm</b>	320,0
<b>Depth in mm</b>	270,0 - 400,0
<b>Weight in kg</b>	32
<b>Delivery condition</b>	Delivery is assembled

## Drawing

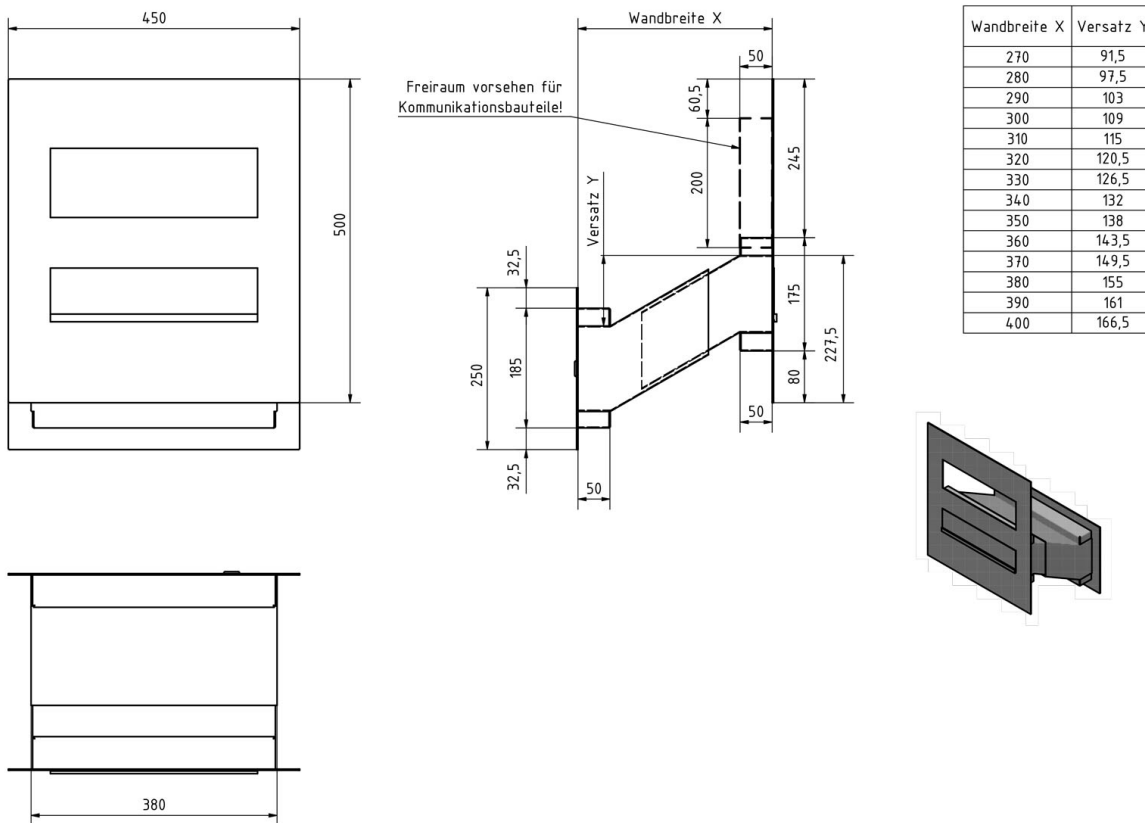

## More images

