

Stainless steel flush-mounted letterbox BASIC Plus 382XU UP with bell box & Description of the stainless steel, ground | with 1 letterbox

Product number 382XU-VA-1-SP-ZFG-150



Product description

Stainless steel flush-mounted letterbox BASIC Plus 382XU UP with bell box & newspaper compartment - polished stainless steel

Modern flush-mounted letterbox with closed newspaper compartment, operated with a toggle lock - made in Germany by Briefkasten Manufaktur.

The letterbox is made entirely of polished V2A stainless steel. The very high-quality workmanship and the well thought-out concept make this flush-mounted letter box our top seller. A rain drainage edge for optimum water protection, a continuous rubber lip for quiet insertion, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this flush-mounted letterbox. The flush-mounted frame made of V2A stainless steel is fitted with a foam rubber seal and guarantees a very long service life.

The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- Flush-mounted letterbox made entirely of stainless steel V2A 1.4301, 240 grain polished
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flap with sound-absorbing rubber seal for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, interchangeable nameplate (type 2) under the flap and post holder.
- Large capacity thanks to optional letterbox depth +50 mm = approx. 17 litres. Suitable for companies and households with very high mail volumes.
- Newspaper compartment with door and toggle lock, powder-coated in RAL colour of your choice. Laser inscription in grey "ZEITUNG".
- Bell box made of stainless steel V2A 1.4301, 240 grain polished
- Speech perforation with universal adapter. (Intercom system/ built-in loudspeaker not included in the scope of delivery). Also available without speech perforation.
- Universal adapter is suitable for all commercially available built-in loudspeakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- · Anti-vandalism The nameplate is indentation-proof and impact-resistant, the plastic is flame-retardant.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, 240 grain polished.

Important information



Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

The mail is only protected against moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water may still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

Product properties

Series BASIC

Number of bell push buttons 1 button, 2 buttons, 3 buttons
Functions Newspaper compartment

Functional box prepared for GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner,

manufacturer Auerswald, Legrand Bticino, Comelit

Boxes by volume Normal > 10 litres

Name labelling Nameplate

Material Stainless steel V2A 1.4301

House number as laser engraving

Removal of mail On the front
Number of boxes with 1 letterbox
Surface/colour Brushed

Mounting type Flush-mounted

Dimensions

Height of single box in mm

330,0

Width of single box in mm

355,0

Capacity in litres

12,0 | 17,0

Height of letterbox slot in mm

35,0

Width of letter slot in mm

405,0

Width of letterbox system in mm

Depth in mm

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0

300,0


300,0

Weight in kg 13

Delivery condition Supplied fully assembled



Drawing

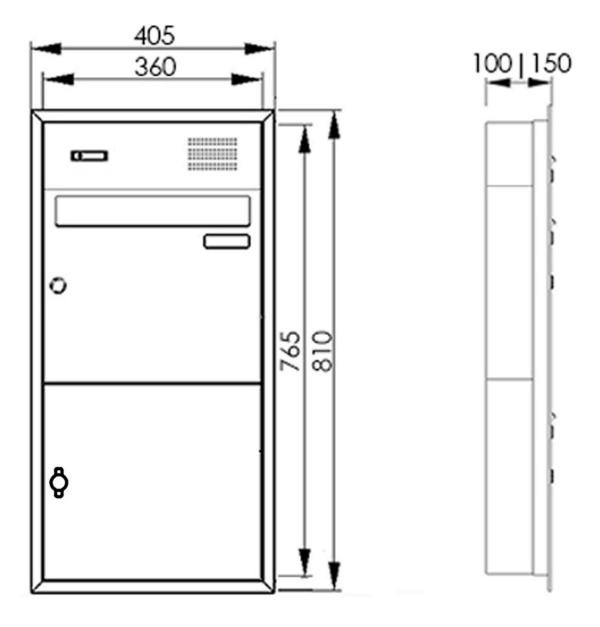



More images





