


Stainless steel door intercom DESIGNER 529S Elegance I - RAL of your choice - Comelit AUDIO complete set

Product number 529S-E-KSCSA-1

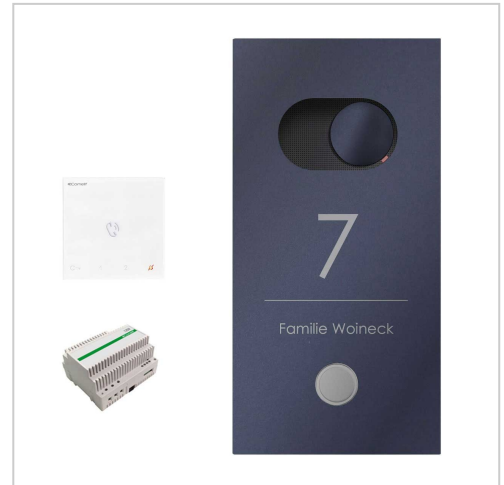

Product description

Stainless steel door intercom DESIGNER 529S Elegance I - RAL colour of your choice - Comelit AUDIO complete set

This simple yet elegant doorbell plate blends seamlessly into the building façade. The front plate made of stainless steel V2A 1.4301 in the colour of your choice is mounted on a 5 mm stainless steel frame and stands out slightly from the house wall. Integrated Comelit door intercom system including home station.

Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Door station made of 2 mm stainless steel V2A 1.4301.
- Front panel powder-coated in RAL colour of your choice.
- Installation box made of 2 mm stainless steel V2A 1.4301, 240 grain polished.
- Dimensions of the bell plate: W 160 mm x H 320 mm x D 8 mm.
- Installation box dimensions: W 130 mm x H 290 mm x D 50 mm
- Optionally for flush mounting or surface mounting.
- 8-12V DC short-stroke bell push-button with LED ring illumination in white.
- Incl. Comelit audio loudspeaker 1621 with holder 1250U-Switch, 2-wire power supply 1210 and audio home station 6750W.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection, the door station should be located under a canopy if possible.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	DESIGNER
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Intercom
Material	Stainless steel V2A 1.4301
House number	House number as laser engraving
Name labelling	Laser-engraved
Mounting type	Surface-mounted, Flush-mounted

Dimensions

Width in mm	130 160
Height in mm	290 320
Depth in mm	52,0
Weight in kg	4
Delivery condition	Delivery is assembled

Drawing

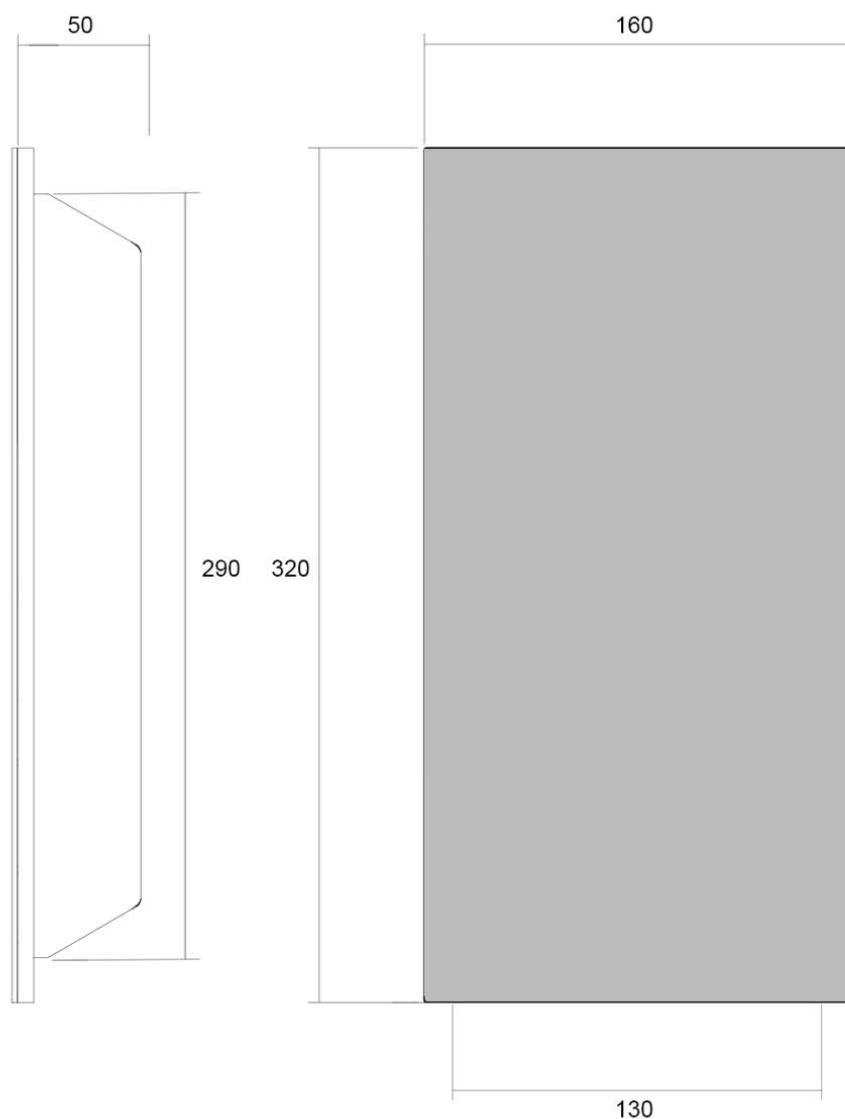

More images



