

# Surface-mounted letterbox with display case BASIC Plus 389XA AP with bell box - 710x660 - RAL of your choice | Left

**Product number** 389XA-4-1-SP-L



## Product description

### Surface-mounted letterbox including showcase BASIC Plus 389XA AP with bell box for intercom system - 710x660 - RAL of your choice - Optional house number

High-quality wall-mounted letterbox with display case made in Germany by Briefkasten Manufaktur. The ideal solution for simple poster display indoors and outdoors.

The display case is made of aluminium, powder-coated in RAL colour. The display case is suitable for 2x DIN A-4 sheets and has a magnetic back panel in RAL colour and a white text panel in the upper visible area. The glazing is made of toughened safety glass, with integrated ventilation openings to prevent the glass from misting up.

The letterbox is made of V2A stainless steel, powder-coated in RAL colour. The very high-quality workmanship and the well thought-out concept make this free-standing letterbox our top seller. A rain drainage edge for optimum water protection, a continuous rubber lip for quiet insertion, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this free-standing letterbox. The side panelling with protruding rain cover made of V2A stainless steel offers optimum protection against the weather and guarantees a very long service life.


The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- **Surface-mounted letterbox system with letterbox made of V2A stainless steel, powder-coated in RAL colour**
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flap with sound-absorbing rubber seal for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, interchangeable name plate (type 2) under the flap and post holder.
- **Display case made of aluminium, powder-coated in RAL colour**
- Suitable for 2x DIN A-4 sheets.
- Glazing made of toughened safety glass / ESG. Integrated ventilation openings to prevent the pane from misting up.
- The viewing area has a surface area of W 560 x H 520mm minus text panel H 80mm.
- Text panel made of white acrylic text panel, removable, without text. The text panel can easily be subsequently covered with labelling film. Lighting with environmentally friendly, energy-saving LED technology possible.
- The door can be opened from left to right with security lock incl. 2 keys.
- Magnetic rear panel in RAL colour.
- Angular aluminium frame construction with internal corner connectors (no plastic!).
- Incl. side cladding + rain cover made of stainless steel V2A, powder-coated in RAL colour.
- **Doorbell box made of weather-resistant V2A stainless steel 1.4301, powder-coated in RAL colour**
- Intercom perforation with universal adapter. (Intercom system/ built-in loudspeaker not included in the scope of delivery). Also available without speech perforation.
- Universal adapter is suitable for all commercially available built-in loudspeakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- 1x round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism - The nameplate (type 1) is indentation-proof and impact-resistant, the plastic is flame-retardant.
- Incl. side cladding + rain cover made of V2A stainless steel, powder-coated in RAL colour.
- For wall mounting incl. fixing material (screws + dowels). Optionally with fastening for bar fence (without rear perforation).

#### Important information:

The post is only protected from moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

#### Optional components

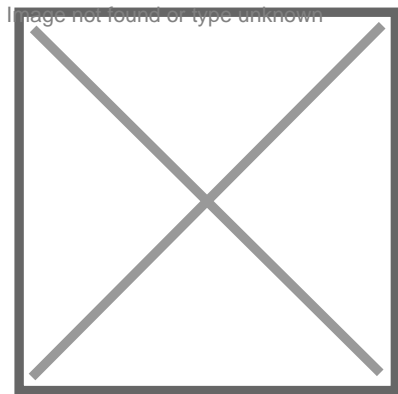

Our letterbox systems are also optionally available including a video intercom set from COMELIT. The COMELIT video intercom sets are completely pre-wired and programmed by us, so the set is ready for connection. Just plug in 2 wires!

COMELIT intercom sets are easily connected using 2-wire technology. This means that the existing wiring can be used and there are no additional costs for new wiring, plastering or painting work. Simply lay 2 wires from the new power supply unit in the meter cupboard to the built-in loudspeaker in the function box of the letterbox system and 2 wires from the power supply unit to the door station in the flat. DONE.

- ++ Ideal for remodelling and renovation, as existing doorbell cables are used
- ++ no additional work for plastering and painting
- ++ low costs due to simple installation
- ++ simple commissioning
- ++ Includes handicap function on the door
- ++ Can be extended at any time to include handicap-compatible monitors for hearing aid users

#### Video intercom set

- **Door station 6741W with mobile function**
- Colour monitor with 4.3" screen 16/9, full-duplex hands-free function and touch-sensitive buttons. Allows brightness and contrast control and adjustment of the audio signal strength and ringtone. Several melodies are available to personalise the ringtone. Equipped as standard with buttons for door opener, for activating/deactivating the speech connection with corresponding LED indicators. Door station with Wi-Fi interface to simulate presence at home: in combination with the COMELIT app, door calls can be answered from anywhere and doors and gates can be opened. Face recognition for contactless access is possible with the COMELIT app. Dimensions: 160 x 115 x 22 mm (WD).
- **Video loudspeaker 4681 with holder 1250U-Switch**
- Colour audio-video unit for 2-wire system, complete with front-adjustable, LED-illuminated colour camera. Equipped with terminal block, speech connection with echo cancellation, dustproof and waterproof loudspeaker, electret microphone and adjustable loudspeaker volume on the front. Additional visual and acoustic programmable handicap indicators. Integrated electronic door opener function (3 A) and additional relay contacts C, NC, NO with 10 A. Dimensions: 102 x 55 x 38 mm (WD)
- **2-wire power supply unit 1209**
- Power supply unit for 2-wire systems for supplying the external call station (terminals L1 - L1) and the riser line (terminals L2 - L2). Equipped with a terminal for line termination. Input voltage 110-240 V AC. Note: The power supply unit does not provide an interface for connecting external lighting such as for nameplates or similar. Dimensions: 106 x 89 x 62 mm (WD) (6 DIN modules)
- **COMELIT push-button with nameplate**

## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	BASIC
<b>Number of bell push buttons</b>	1 button, 2 buttons
<b>Functional box prepared for manufacturer</b>	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
<b>Boxes by volume</b>	Normal > 10 litres
<b>Name labelling</b>	Nameplate
<b>Material</b>	Aluminium AlMg3 W19, Stainless steel V2A 1.4301
<b>House number</b>	House number as laser engraving
<b>Removal of mail</b>	On the front
<b>Number of boxes</b>	with 1 letterbox
<b>Mounting type</b>	Surface-mounted

## Dimensions

Height of single box in mm	BK 330.0   SK 660.0
Width of single box in mm	BK 355.0   SK 710.0
Capacity in litres	12
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	660,0
Width of letterbox system in mm	1065,0
Depth in mm	100,0
Weight in kg	28
Delivery condition	Supplied in blocks, display case/letterbox divided

## More images







