

Design surface-mounted letterbox GOETHE AP lateral with GIRA System 106 - RAL of your choice - AUDIO complete set | Right | without newspaper compartment | Gira System 106 complete set audio

Product number 215-AP-1-SPS-KSAGI106-R



Product description

Design surface-mounted letterbox GOETHE® AP lateral with GIRA System 106 - RAL of your choice - AUDIO complete set

High-quality surface-mounted letterbox with seamlessly integrated Gira System 106 in flush-mounted design. The modern GOETHE® letterbox is ideal for the sophisticated entrance area. The linear design without a visible lock gives this letterbox a particularly elegant appearance. 3 GIRA system modules are included, so the letterbox can be used directly. The matching GIRA home station and the control unit to complete this letterbox are included. The modules can be exchanged at any time thanks to the simple mounting system.

The dimensions of the individual box allow a capacity of approx. 16 litres, and the large insertion slot guarantees no crumpled mail, even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The surface-mounted letterbox systems in the GOETHE® collection are characterised by the consistent use of stainless steel and aluminium. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5



- High-quality surface-mounted letterbox made of stainless steel and aluminium.
- Quality production Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. So the mail cannot fall towards you.
- · Optionally with house number and name labelling, laser-engraved.
- Function box (BH 200x400mm) made of stainless steel 1.4016 (rustproof magnetic stainless steel), powder-coated in RAL colour of your choice.
- Doorbell plate made of stainless steel, powder-coated in RAL colour. A bell is lasered onto the bell plate for better recognisability.
- Optimum rain protection thanks to rain guard edges and a rain cover made of 3 mm aluminium AIMg3 W19, powder-coated in RAL colour of your choice.
- Side cladding made of 3mm aluminium AlMg3 W19, powder-coated in RAL of your choice.
- · Incl. mounting rail for wall mounting.
- Incl. GIRA home station & control unit enclosed, System 106 door station module installed.

⊕ Anot found or type unknown

Gira System 106 door station module - 5565 920, installed without wiring

- · Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with power via the door station module.

Surface-mounted home station Gira 1250XX, enclosed

- Completely pre-assembled surface-mounted home station for quick and clean installation.
- Design diversity through integration into the switch range, resulting in a uniform appearance of door communication and electrical installation.
- Installation both with and without cover frame.
- Simple installation thanks to plug-in screw terminals on the mounting plate. Contact is made to the home station when the home station is plugged onto the mounting plate.
- Easy removal of the home station during renovation work.
- · Fixing holes for mounting.
- Signal transmission and power supply to the home station via reverse-polarity protected and short-circuit-proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Ring tone differentiation between door call, internal call and storey call.
- Choice of five different ring tone melodies that can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise cancellation).
- Enforcement function for loud ambient noise during voice communication.
- · Listen-in blocking.
- Operating buttons with integrated LEDs for status display.

Audio REG control device Gira 128700, enclosed

- Supply of the reverse-polarity protected and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door release programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for the power supply of a standard electric strike.
- Permanent AC 12 V output for supplying power to a DCS-TC gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information



Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of

your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white

Series GOETHE
Connection technology 2-wire
Number of bell push buttons 1 button
Functions Intercom
Functional box prepared for GIRA

manufacturer

Material Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic

stainless steel)

House number A House number as laser engraving

Name labellingLaser-engravedRemoval of mailOn the frontNumber of boxeswith 1 letterboxBoxes by volumeLarge > 16 litresMounting typeSurface-mounted

Dimensions

Height of single box in mm 400,0
Width of single box in mm 400,0
Capacity in litres 16
Height of letterbox slot in mm 35,0
Width of letter slot in mm 360,0
Total width in mm 608,0

Depth in mm 100.0 + 25.0 Rain roof

Weight in kg 21

Delivery condition Delivery is assembled


Handelsregister Amtsgericht Lemgo, HRB 8618


Page 3

Geschäftsführer Oliver Woineck Ust.ID.Nr. DE303690847



Drawing

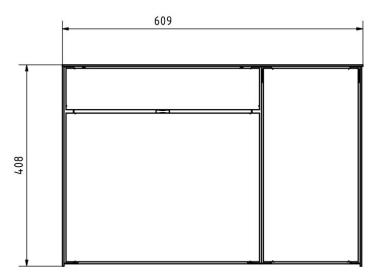





More images





