

# Design flush-mounted letterbox GOETHE UP with newspaper compartment - RAL of your choice - doorbell intercom box - INDIVIDUAL | with newspaper compartment | 100mm depth | Individual preparation

Product number 215-UP-1-SP-ZF-IND



## Product description

### Design flush-mounted letterbox GOETHE UP with newspaper compartment - RAL of your choice - doorbell intercom box

High-quality flush-mounted letterbox with newspaper compartment and bell/intercom box in flush-mounted design. The modern GOETHE letterbox is ideal for the sophisticated entrance area. The linear design without a visible lock makes this letterbox look particularly elegant. The individually configurable bell intercom box is available with a flush-mounted bell button, a nameplate or labelling in combination with your desired intercom preparation (built-in loudspeaker not included) and/or camera preparation.

The dimensions of the single box allow a capacity of approx. 16 litres, the large insertion slot guarantees no crumpled mail even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

**Protected utility model according to DPMA file number DE: 20 2021 101 679.5**

- Flush-mounted letterbox made entirely of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. So the mail cannot fall towards you.
- Optional house number labelling approx. 70-80 mm high.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (stainless magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser inscription "ZEITUNG" (font ARIAL, if name/house number, then the same as your chosen font).
- Newspaper compartment can be opened from bottom to top.
- Functional box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Choice of replaceable stainless steel nameplate with laser inscription, nameplate made of Plexi or illuminated direct inscription.
- 8-12V DC short-stroke bell push with LED ring lighting (blue, white, red or green). The bell button lighting cannot be supplied via the control unit. It must be connected to an additional 8-12 V DC power supply.
- An 8-12 V DC short-stroke light button with pictogram is available as an option.
- Preparation (built-in loudspeaker not included) for intercom system possible.
- Optionally with universal adapter for all commercially available built-in loudspeakers.
- Optional preparation (camera not included in scope of delivery) for a camera.
- Optimum rain protection thanks to rain guard edges.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.

## Important information

Camera or call station preparation

**We recommend that the electrical installation is always carried out by an electrician.**

We offer the preparation of intercom stations from various manufacturers for our letterboxes. The preparation does not include any end devices, but only the provision of screw mounts, drill holes and perforations. This means that you can install your end device without any problems.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GOETHE
<b>Number of bell push buttons</b>	1 button
<b>Functions</b>	Newspaper compartment, Light button, Camera, Intercom, Fingerprint, Keypad
<b>Functional box prepared for manufacturer</b>	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, HHG, HIKVISION, PCS, Sesam, ekey, Comelit, Schneider Intercom / COMMEND
<b>Name labelling</b>	Laser-cut engraving, Nameplate, Laser-engraved, Illuminated laser-cut engraving
<b>Material</b>	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
<b>House number</b>	House number as laser engraving
<b>Removal of mail</b>	On the front
<b>Number of boxes</b>	with 1 letterbox
<b>Boxes by volume</b>	Large > 16 litres
<b>Mounting type</b>	Flush-mounted

## Dimensions

<b>Height of single box in mm</b>	BK 400.0   ZF 200.0
<b>Width of single box in mm</b>	400,0
<b>Capacity in litres</b>	BK 16.0   ZF 8.0
<b>Height of letterbox slot in mm</b>	35,0
<b>Width of letter slot in mm</b>	360,0
<b>Height of letterbox in mm</b>	External dimension 852.0   installation dimension 820.0
<b>Width of letterbox system in mm</b>	External dimension 450.0   installation dimension 420.0
<b>Total width in mm</b>	External dimension 450.0   installation dimension 420.0
<b>Depth in mm</b>	100.0   installation dimension 103.5
<b>Weight in kg</b>	17
<b>Delivery condition</b>	Delivery is assembled

Drawing

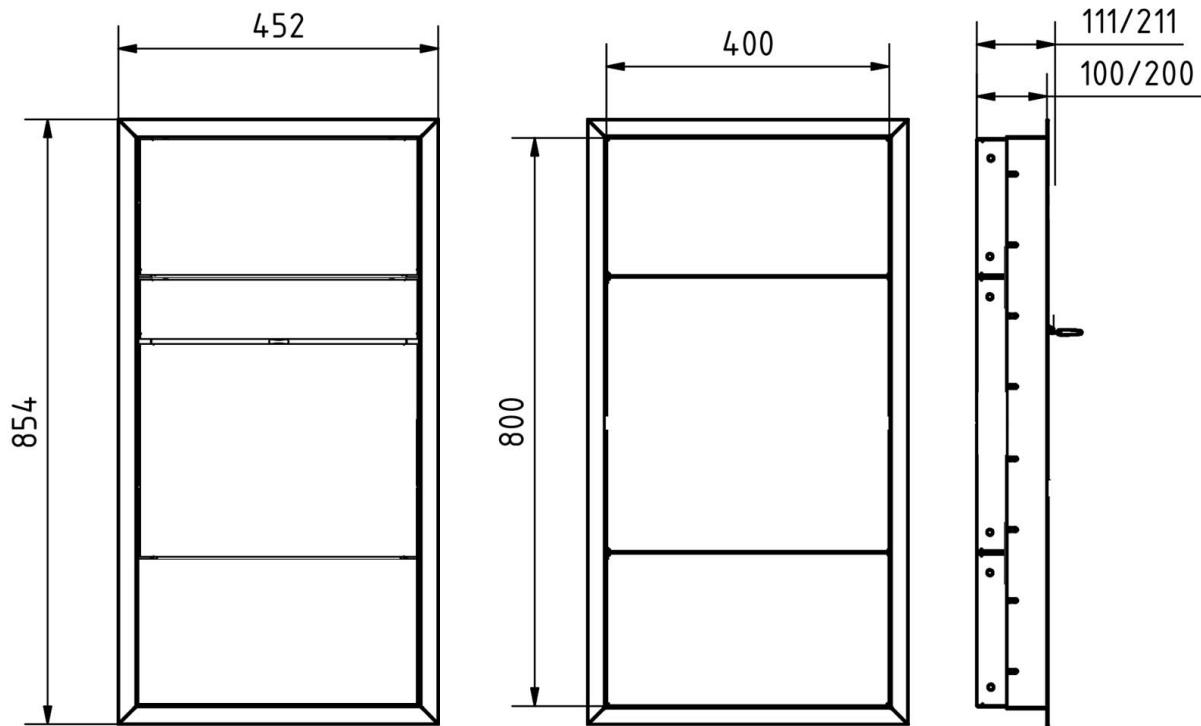

## More images



