

Design surface-mounted letterbox GRIMM - colour of your choice with preparation for camera and intercom system on the right | Right | Individual preparation | ? Colour of your choice | Surface-mounted

Product number 562-AP-SPR-1-SF-IND



Product description

Design letterbox GRIMM® - A masterpiece of letterbox manufacturing

The GRIMM designer surface-mounted letterbox combines modern design with first-class workmanship - ideal for discerning clients and architects who are looking for an elegant solution for integrating a camera and built-in loudspeaker. Manufactured from high-quality stainless steel and completely "Made in Germany" by the letterbox manufacturer Lippe, this model stands for durability, functionality and a stylish look. The powder-coated front panel made of 2 mm stainless steel V2A (#####_0__) impresses with its timeless appearance and high corrosion resistance.

Compatible with popular manufacturers: LOXONE, Siedle, Busch-Jaeger, Gira, TCS, Legrand BTicino, Ritto, STR Elektronik, ELCOM, HHG, Comelit, Mobotix, HIKVISION and many others available on request.

The **preparation for a camera** (not included in the scope of delivery) provides a secure basis for modern video surveillance directly at the building entrance. **Preparation for built-in loudspeakers** is also possible - on request with a suitable universal adapter for various intercom stations. This allows the letterbox to be perfectly adapted to your existing technology.

The GRIMM® letterbox is not only a visual highlight, it is also at the forefront in terms of functionality and quality. Thanks to the innovative push-key lock, the letterbox can be operated easily and conveniently with one hand. Open the door with one push and close the door without using a key. The lock is optimally protected from the weather. The letterbox also features an intelligent removal system: the door opens from top to bottom, ensuring that the mail remains securely in the box and cannot fall towards you. Mail is also conveniently inserted from the front, with high-quality axle dampers ensuring that the flap closes gently. The GRIMM is particularly unique thanks to its double box system: the surface-mounted body made of powder-coated stainless steel V2A (#####) is installed first, while the cover can be inserted once the installation work is complete. The offset cover also offers optimum protection against rain and other environmental influences.

Thanks to the DIN/EN 13724 standard, the GRIMM is ideal for large letters in C4 format, which can be inserted without creasing. The GRIMM® letterbox impresses with its durable quality, timeless design and sophisticated functionality.

- High-quality letterbox made entirely of stainless steel for surface mounting.
- Front panel made of 2 mm stainless steel V2A 1.4301, powder-coated in the colour of your choice.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Preparation (built-in loudspeaker not included) for intercom system possible. Optionally with universal adapter for all commercially available built-in loudspeakers.
- Optional preparation (camera not included) for a camera.
- House number approx. 70mm high (max. 3 digits) with energy-saving LED lighting 12V DC approx. 50mA / 1W, white.
- Optional interchangeable stainless steel nameplate with laser inscription or nameplate made of Plexi.
- 8-12V DC short-stroke bell push with LED ring lighting (blue, white, red or green). The bell button lighting cannot be supplied via the control unit. It must be connected to an additional 8-12 V DC power supply.
- An 8-12 V DC short-stroke light button with pictogram is available as an option.
- Incl. EVN LED power supply unit / transformer IP65 12V/DC 0.1-4W for the LED lighting (house number, bell push and nameplate if selected).
- Innovative push-key lock including 2 keys with key number, convenient locking without key, optimally protected from the weather.
- The removal door with opening limiter opens from top to bottom to prevent mail from falling towards you.
- Front mail slot with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724-compliant letterbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape - even large letters remain intact. Additional stainless steel removal protection integrated.
- Optimum weather protection thanks to offset cover.
- Double box system: Ideal for surface mounting. The cover can be easily installed once the construction work is complete.
- Surface-mounted box made of 2 mm stainless steel V2A 1.4301, powder-coated.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GRIMM
Number of bell push buttons	1 button
Functions	Light button, Camera, Intercom, Fingerprint, Keypad
Functional box prepared for manufacturer	LOXONE, GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, HHG, HIKVISION, PCS, Sesam, ekey, Comelit, Schneider Intercom / COMMEND, Mobotix
Name labelling	Laser-cut engraving, Nameplate, Laser-engraved, Illuminated laser-cut engraving
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving, House number as laser cut, illuminated
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	460,0
Width of single box in mm	410,0
Capacity in litres	26,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	760,0
Width of letterbox system in mm	460,0
Depth in mm	150,0
Weight in kg	29
Delivery condition	Delivery is assembled

Drawing

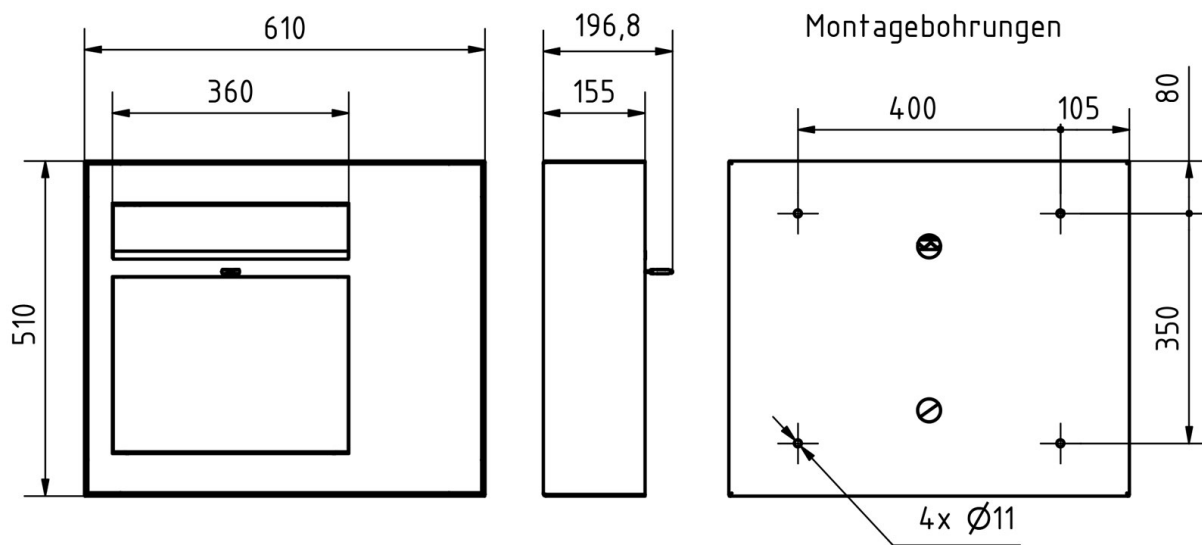

More images

