

# 2-post letterbox design BASIC 385-VA ST-R with bell box - polished V2A stainless steel | Top | with 2 letterboxes | Stainless steel, ground

**Product number** 385-VA-2S-SP



## Product description

### 2-post letterbox design BASIC 385-VA ST-R with bell box - polished V2A stainless steel

Modern free-standing letterbox for 2 parties made in Germany by Briefkasten Manufaktur.

The letterboxes and stand elements are made of weather-resistant V2A stainless steel, polished. The very high-quality workmanship and the well thought-out concept make this letterbox system our top seller. A rain drainage edge for optimum water protection, a double-edged throw-in flap with rubber lip, the solid interchangeable nameplate and the robust lock characterise this free-standing letterbox.

Thanks to the design, self-assembly is straightforward.

- **2-post letterbox system made of stainless steel V2 A, polished**
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letterboxes comply with DIN/EN 13724. Insertion size (3.5 cm x 26.5 cm) for C4 high, large letters also fit in here without creasing.
- Insertion flaps with sound-absorbing rubber lip for very quiet insertion of mail.
- The doors can be opened from left to right.
- Incl. 2 keys with key number and changeable name plate under the flap for each letterbox.
- With close-fitting side panelling and rain cover in solid design.
- The stand elements are made of 60.0 mm V2A stainless steel 1.4301, polished for screw mounting or setting in concrete.
- **Intercom bell part made of V2 A stainless steel, polished**
- Intercom perforation with universal adapter. (Intercom system/ built-in loudspeaker not included in scope of delivery).
- Universal adapter is suitable for all commercially available built-in loudspeakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push type 4, max. 250 V AC, 5 A.
- Anti-vandalism - The nameplate is indentation-proof and impact-resistant, the plastic is flame-retardant.
- Cable access: Ø 10.4 mm (on the right-hand side). Invisible cable routing through the stand element.

## Important information

### Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

### Water protection

The mail is only protected against moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water may still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

## Product properties




<b>Series</b>	BASIC
<b>Number of bell push buttons</b>	2 buttons
<b>Functions</b>	Light button, Intercom
<b>Functional box prepared for manufacturer</b>	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
<b>Boxes by volume</b>	Normal > 10 litres
<b>Name labelling</b>	Nameplate
<b>Mounting type</b>	Free-standing
<b>Material</b>	Stainless steel V2A 1.4301
<b>Number of boxes</b>	with 2 letterboxes
<b>Removal of mail</b>	On the front
<b>Surface/colour</b>	Brushed

## Dimensions

<b>Height of single box in mm</b>	110,0
<b>Width of single box in mm</b>	300,0
<b>Capacity in litres</b>	12
<b>Height of letterbox slot in mm</b>	35,0
<b>Width of letter slot in mm</b>	265,0
<b>Height of letterbox in mm</b>	330,0
<b>Width of letterbox system in mm</b>	300,0
<b>Overall height in mm</b>	1200,0   1500,0   1700,0
<b>Total width in mm</b>	465,0
<b>Depth in mm</b>	435,0
<b>Weight in kg</b>	21
<b>Delivery condition</b>	Supplied in blocks, stand elements / letterbox divided

## Drawing

Montagebohrungen

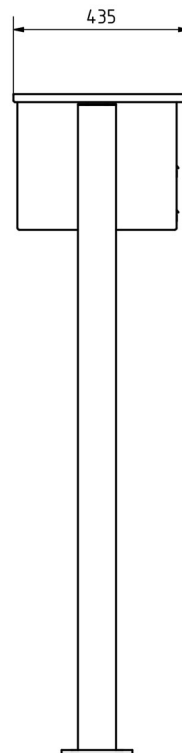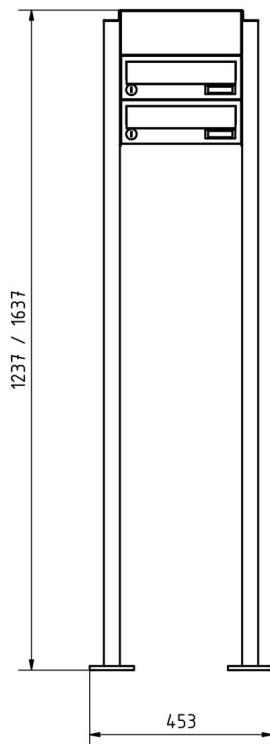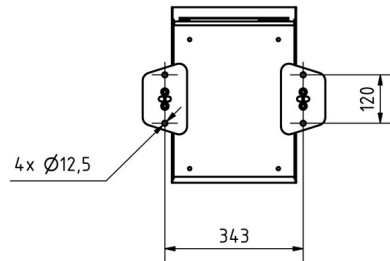

## More images

