

# Stainless steel wall entry designer model BIG with DoorBird video intercom - RAL of your choice

**Product number** 515DW-VAR-KSDB2101E



## Product description

### Stainless steel wall-mounted mailbox designer model - RAL 7016 anthracite grey with DoorBird D2100E or D1100E video intercom - VIDEO set

High-quality, through-the-wall letterbox from Briefkasten Manufaktur. Due to the variable shaft length between 270mm and 400mm, this letterbox can be used in almost all masonry. The post is removed from the rear. The front and rear stainless steel plates made of 2mm stainless steel V2A, powder-coated to RAL colour, can be invisibly attached to the wall thanks to the screw connection inside the shaft. No fixing screws are visible. Integrated DoorBird IP Video Door Station D2100E or D1100E. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your entrance door. The IP video door station can be operated as a stand-alone unit or integrated into an existing smart home platform. Existing, classic installations such as a door chime or an electric door and gate opener can also continue to be used with DoorBird and controlled via the app.

This is a real eye-catcher among letterboxes. Clean lines and no-frills design characterise the designer letterbox. Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur. The DoorBird was not only invented and developed in Germany, but is still produced in Berlin today. At DoorBird, "Made in Germany" is not just a seal, but a philosophy that is lived and breathed. The IP video door stations are manufactured in the DoorBird factory to guarantee the highest quality, durability and customer satisfaction.

- Designer stainless steel mailbox made of 2 mm stainless steel V2A 1.4301, powder-coated to RAL fine structure matt.
- Rear mail removal door 300x100mm, opens from left to right. Incl. 2 keys with key number.
- Mail slot from the front, dimensions: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without creasing. Attention no removal protection!
- Dimensions front panel W 450mm x H 500mm.
- Cover plate dimensions with removal door W 450mm x H 250mm.
- Dimensions of letter chute W 380 mm x H 210-280mm.
- Variable shaft length 270-400mm.
- Optionally with house number, backlit in white incl. EVN LED power supply unit / transformer IP65 12V/DC 0.1-4W for LED illumination of the house number.
- Incl. DoorBird IP video door station D2100E or D1100E installed.

## Important information

Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to penetrate the letterbox. It is therefore necessary to plan sufficiently dimensioned letterboxes for the upcoming requirements. In certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.



## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GRIMM
<b>Functions</b>	Newspaper compartment, Camera, Intercom, Fingerprint, Keypad
<b>Functional box prepared for manufacturer</b>	DoorBird
<b>Name labelling</b>	Nameplate
<b>Material</b>	Stainless steel V2A 1.4301
<b>House number</b>	House number as laser cut, illuminated
<b>Number of boxes</b>	with 1 letterbox
<b>Boxes by volume</b>	Jumbo > 30 litres, Large > 16 litres
<b>Mounting type</b>	Wall throw-through
<b>Removal of mail</b>	On the back

## Dimensions

<b>Capacity in litres</b>	21,0   31,0
<b>Height of letterbox slot in mm</b>	63,0
<b>Width of letter slot in mm</b>	350,0
<b>Depth in mm</b>	270,0 - 400,0
<b>Weight in kg</b>	32
<b>Delivery condition</b>	Supplied partially disassembled

## Drawing

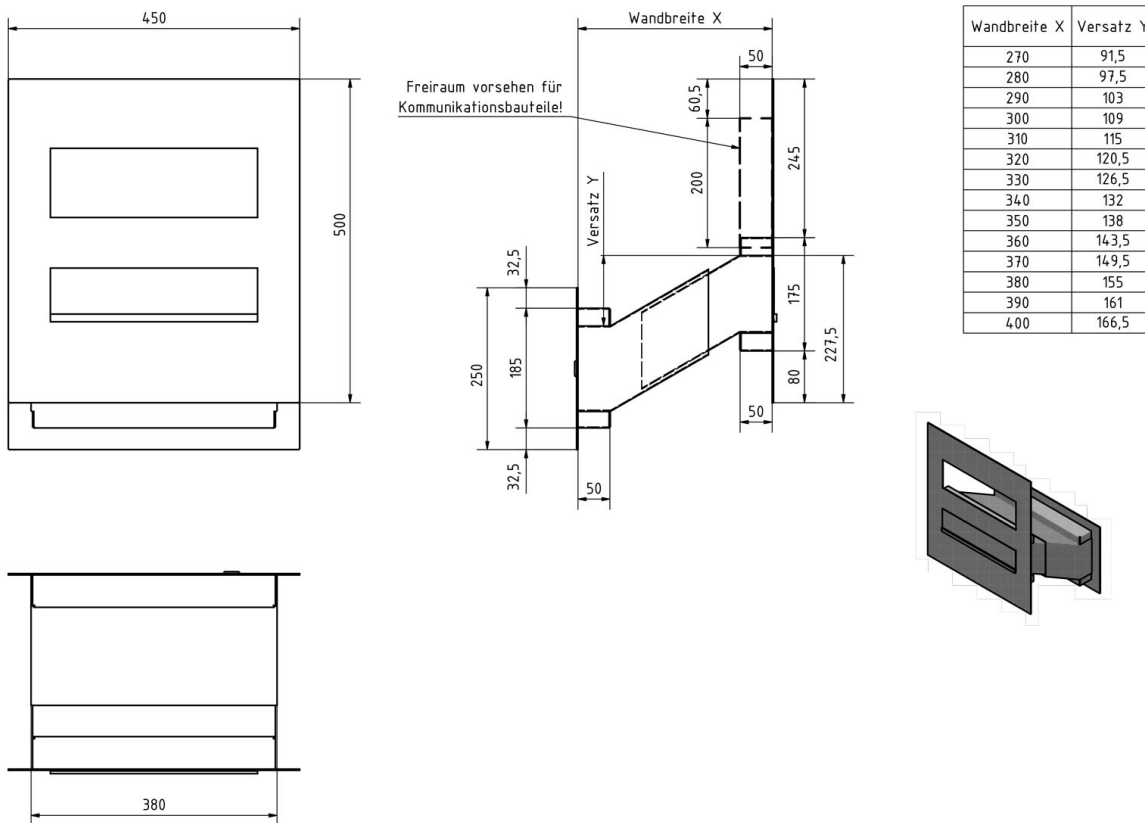

## More images



