

Design wall light KELLER with motion detector 250x315 - stainless steel powder-coated - RAL of your choice | with motion detector | ? Colour of your choice

Product number 636R



Product description

Design wall light KELLER with motion detector 250x315 - powder-coated stainless steel - RAL colour of your choice

High-quality wall light with motion detector for outdoor and indoor use with stainless steel cover, powder-coated.

- The wall light is made of cast aluminium, powder-coated stainless steel and pressed glass, opal.
- Incl. integrated motion detector.
- Base E 27, suitable for lamps of energy classes A++ to E max. 57 W.
- Protective conductor connection.
- Protection class IP 44 - splash-proof.
- With cast aluminium mounting plate for fixing.
- 2 fixing holes 6 mm, distance diagonal, vertical 150 mm, horizontal 52 mm Connection terminal 2 x 2.5 mm².
- CE mark of conformity.
- Manufactured by Gebrüder Albert GmbH & Co KG Leuchtenfabrik - Quality Made in Germany (Fröndenberg).

Installation:

The national and international electronic safety regulations must be observed for the installation and operation of this luminaire. Use the three grub screws to loosen the wall plate from the luminaire fitting. Feed the mains cable connection through the cable grommet and fix the wall plate to the mounting base. Push the enclosed silicone tubes over the connecting wires. Connect the protective conductor and electrical connection to the terminal. Insert the light source. Tighten the light fitting and glass to the wall plate using the grub screws. Please read the enclosed operating instructions for handling the integrated motion detector.


Product properties

Surface/colour	RAL 9005 deep black, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Protection type	IP44
Illuminants	ohne
Functions	Motion detector
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Protection class	I

Dimensions

Width in mm	250
Height in mm	315
Total width in mm	250
Depth in mm	110,0
Delivery condition	Supplied fully assembled

Drawing

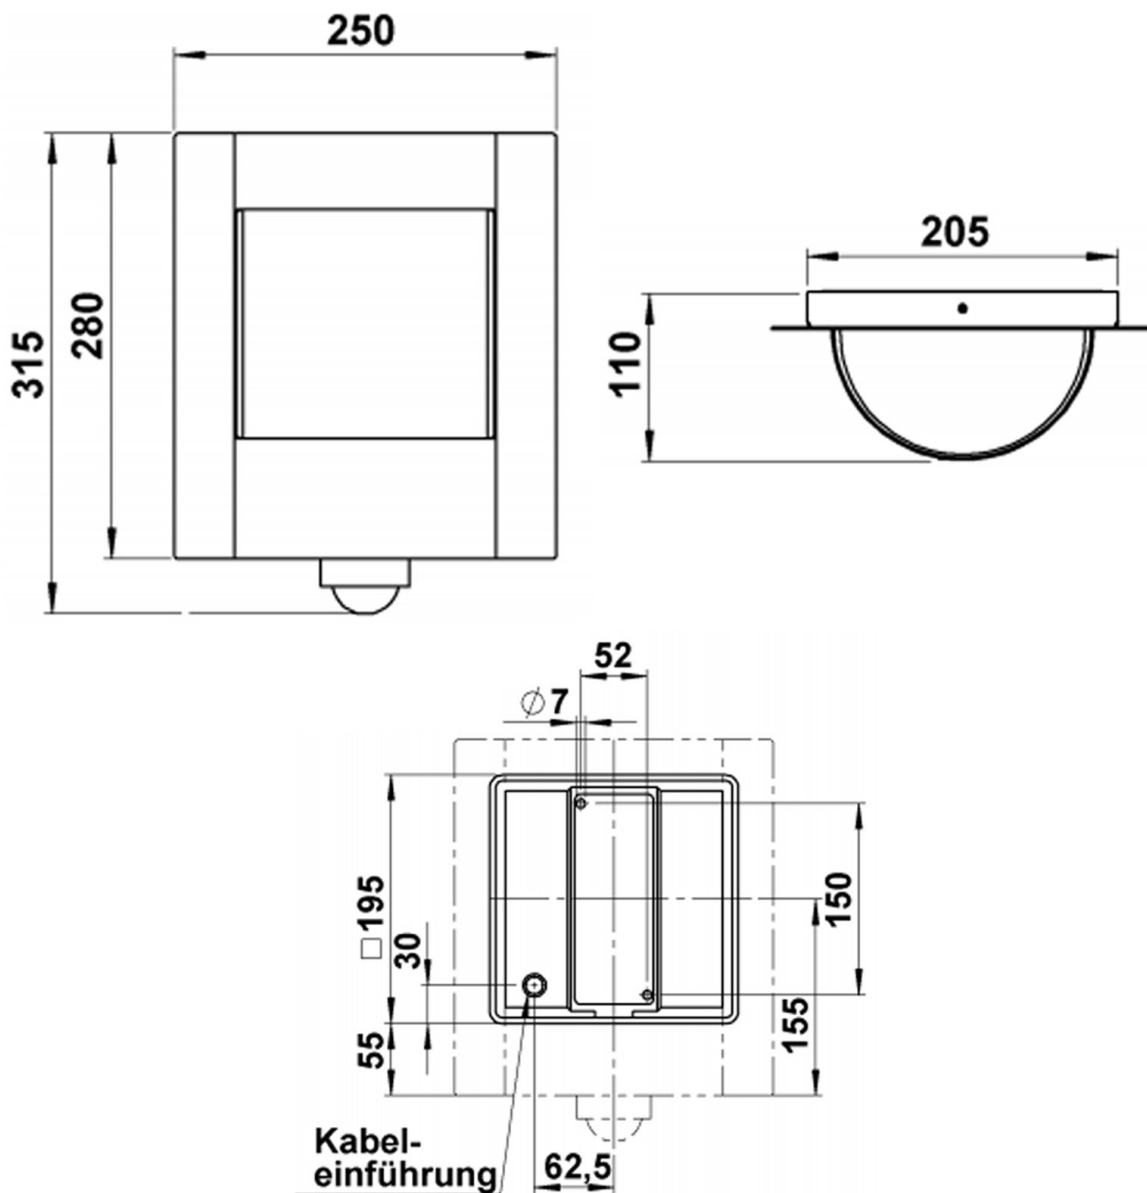

More images

