

Stainless steel video doorbell pedestal designer - RAL of your choice - COMELIT Ultra Touch - complete set | without | Comelit Ultra | 130 cm | ? Colour of your choice

Product number 870-VAR-KSUT2090-130



Product description

Stainless steel video doorbell pillar designer - RAL of your choice - COMELIT Ultra Touch - complete set

The high-quality video doorbell pillar with COMELIT Ultra Touch touchscreen impresses with its modern technology, elegant appearance and maximum flexibility. Made entirely from powder-coated V2A stainless steel, it stands for durability, value and timeless design - Made by Briefkasten Manufaktur.

The flush-mounted, integrated 5-inch touch display with shatterproof glass forms the centrepiece of this innovative door station. It not only enables simple operation through intuitive user guidance, but also a wide range of customisation options: Whether company logo, welcome text or user-defined touch surfaces - the Ultra Touch offers almost unlimited customisation options. Visitors can gain direct access via touch panel, code module or RFID chip (COMELIT Fob). Thanks to the modern 2-wire technology, installation is quick, uncomplicated and requires no additional installation work - ideal for refurbishments and retrofits. Simply connect two existing wires and put the door station into operation. The integrated wide-angle camera (120° horizontal, 90° vertical) provides high-resolution images - supported by intelligent LED illumination with twilight sensor and infrared function, which ensures a clear view even in poor lighting conditions. The combination of digital microphone and hi-fi audio speakers guarantees excellent voice quality - even in the presence of ambient noise.

Equipped with Bluetooth Low Energy (BLE), the digital directory can be conveniently managed via the MyComelit app or the browser version - using a smartphone or PC, even wirelessly via Bluetooth. This enables particularly easy configuration on site, without opening the device or separate programming hardware. For additional flexibility in access control, the doorbell pillar offers a Wiegand output that can be used to integrate external systems from third-party providers. This makes the Ultra Touch a central component of your security and access solution.

Inside, the LS8741 home station impresses with its modern design and intuitive user interface. The system can be conveniently connected to the free COMELIT app via the integrated WiFi function. This not only allows you to receive video calls from the door station directly to your smartphone - no matter where you are - but also gives you access to live images from the cameras, stored video messages and allows you to open doors or gates remotely. Other smart functions such as face recognition and voice control via Amazon Alexa set new standards in intelligent home communication. Open your door without a key or app - just by looking at it. Integration is simple and requires no specialist knowledge.

The pedestal is made of 1.5 mm thick stainless steel V2A, powder-coated in your preferred RAL colour on request, and is available in either 1300 mm or 1600 mm height. The welded construction stands on a solid VA base plate, which ensures maximum stability and a clear, minimalist look. Invisible cable routing is possible through the body. The high-quality cover plate, which conceals all fixing screws and emphasises the high-quality appearance, is part of the installation.

- **Doorbell pillar made of 1.5 mm V2A stainless steel, powder-coated in RAL colour**
- The speech part is made of 2 mm stainless steel V2A 1.4301, powder-coated in RAL colour. Dimensions: W 190 mm x H 640 mm x D 110 mm.
- Incl. 6x screw cover caps made of V2A stainless steel, polished so that the screws for fastening the front panel are not visible. See pictures.
- The fully welded pedestal is made of 1.5 mm V2A stainless steel, powder-coated. Construction height is either 1.30 m or 1.60 m.
- The pedestal is equipped with a VA base plate. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body is possible.
- **Door station with audio/video unit and 5-inch touchscreen for up to 100 parties (more parties possible on request).**
- 2-wire system, simply plug in 2 wires and get started.
- Touch module with Bluetooth connection for managing the directory via the MyComelit app or MyComelit browser version.
- Wiegand output for the interfaces of third-party access control systems.
- RFID reader
- Wide-angle camera (2-wire: H120° x V90° field of view) with high resolution.
- LED illumination of the camera and buttons with twilight sensor to save energy
- Omnidirectional digital microphone and two speakers for hi-fi audio.
- Additional visual and acoustic indicators for the disabled, adjustable in the programming.
- Programming of button addresses in smart mode.
- Protection class IP65 and IK08.
- Incl. LS8741 home station with mobile function and 1210A power supply unit.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to penetrate the letterbox. It is therefore necessary to plan sufficiently dimensioned letterboxes for the upcoming requirements. Under certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GRIMM
Connection technology	2-wire
Functions	Camera, Intercom, Keypad
Number of bell push buttons	up to 100 bell buttons
Functional box prepared for manufacturer	Comelit
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301

Dimensions

Height of single box in mm	640,0
Width of single box in mm	190,0
Overall height in mm	1300,0 1600,0
Total width in mm	220.0 (foot plate 320.0)
Depth in mm	110.0 (foot plate 210.0)
Weight in kg	40
Delivery condition	Delivery is assembled

Drawing

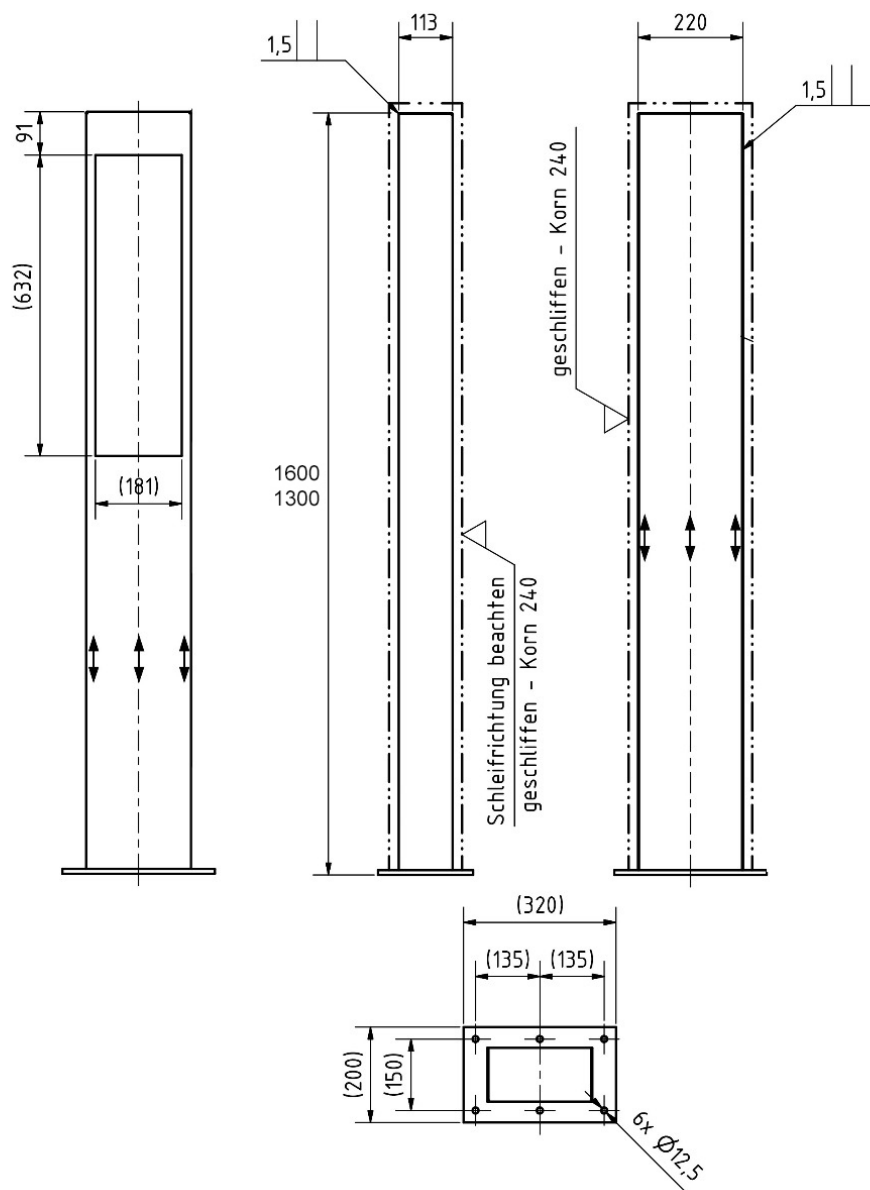

More images

