


Video loudspeaker 4681 Switch with 1250U for rear mounting with external buttons incl. power supply unit 1210A

Product number 1299-4681-1210-MP

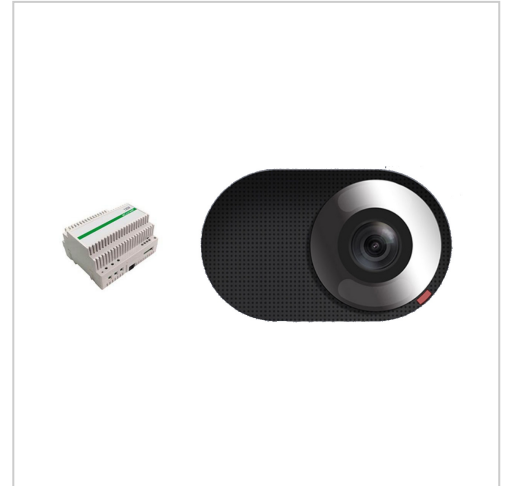

Product description

Video loudspeaker 4681 Switch with 1250U for rear mounting with external buttons incl. power supply unit 1210A

Comelit video loudspeaker 4681 Switch for rear mounting in letterbox systems with external push-buttons (push-button interface Switch 3063D and home station required, not included).

- Colour audio-video unit for 2-wire system, complete with front-adjustable, LED-illuminated colour camera.
- 2-wire system, simply plug in 2 wires and get started.
- Resolution: 500x582 pixels.
- Detection angle: 100°.
- LED illumination of the camera.
- Speech connection with echo cancellation, dustproof and waterproof loudspeaker, electret microphone and adjustable loudspeaker volume on the front.
- Additional visual and acoustic indicators for disabled persons, adjustable in the programming.
- Integrated electronic door opener function (3 A) and additional relay contacts C, NC, NO with 10 A.
- Protection class IP65 and IK08.
- Module for rear installation in our faceplates and letterbox systems (Comelit video loudspeaker 4681/1621 prepared).
- Incl. power supply unit 1210A and installation bracket 1250U Speaker series SWITCH 16xx, 46xx, SB, SB2, VIP (optional accessories required: push-button interface Switch 3063D from 3 users, home station video 6741W, 6721W or 6801W).

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.


Product properties

Connection technology 2-wire

Dimensions

Width in mm	Video loudspeaker 100 Power supply 141
Height in mm	Video loudspeaker 90 Power supply 89
Depth in mm	Video speakers 35.0 Power supply 62.0
Weight in kg	2
Delivery condition	Delivery is assembled

More images

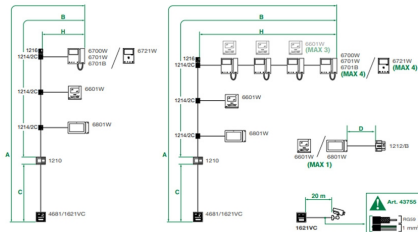

Zulässige Entfernungen für die Artikel: 6700W, 6701W, 6701B, 6701W, 6801W

	A MAX.	B MAX.	C MAX.	H MAX.	D MAX.	Art 1216
Cornell Art. 4577/1679 1 mm ² (Ø 1,2 mm AWG 17)	260 m (850 Fuß)	130 m (425 Fuß)	130 m (425 Fuß)	50 m (164 Fuß)	100 m (328 Fuß)	25
UTP Kat. 5 0,2 mm ² (Ø 0,5 mm AWG 24)	80 m (260 Fuß)	40 m (130 Fuß)	40 m (130 Fuß)	30 m (98 Fuß)	/	25
0,28 mm ² (Ø 0,6 mm AWG 23)	100 m (328 Fuß)	50 m (164 Fuß)	50 m (164 Fuß)	30 m (98 Fuß)	10 m (32,8 Fuß)	25
0,5 mm ² (Ø 0,8 mm AWG 20)	140 m (460 Fuß)	70 m (230 Fuß)	70 m (230 Fuß)	30 m (98 Fuß)	25 m (82 Fuß)	25
1 mm ² (Ø 1,2 mm AWG 17)	200 m (656 Fuß)	100 m (328 Fuß)	100 m (328 Fuß)	40 m (130 Fuß)	50 m (164 Fuß)	25
1,6 mm ² (Ø 1,4 mm AWG 15)	80 m (260 Fuß)	40 m (130 Fuß)	40 m (130 Fuß)	30 m (98 Fuß)	100 m (328 Fuß)	25
*UTP Kat. 5 0,2 mm ² (Ø 0,5 mm AWG 24) MULTI PAIR CABLE	260 m (850 Fuß)	130 m (425 Fuß)	130 m (425 Fuß)	50 m (164 Fuß)	/	25

*UTP-Kabel mit Doppeladern-Anschluss DIE IN DER ABBILDUNG ANGEZEIGTEN FARBEN BEACHTEN!

