


# DIVISION 530S modular video door station with DoorBird D1100E - RAL colour with stainless steel application

**Product number** 530S-ES-KSDB1100-1

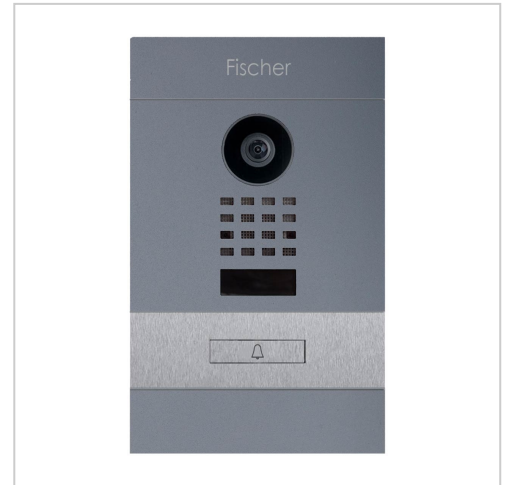

## Product description

### DIVISION 530S modular video door station with DoorBird D1100E - RAL colour with stainless steel application

This simple yet elegant doorbell plate blends seamlessly into the building façade. The multi-part front plate made of stainless steel V2A 1.4301 in the colour of your choice is mounted on a 5 mm stainless steel frame and stands out slightly from the house wall. The stainless steel front panel with illuminated bell push in white provides an accent here. The individual front panels can be changed at any time, so the camera model can be replaced even years later. Integrated DoorBird IP Video Door Station D1100E. The DoorBird IP Video Door Station D1100E is the smart solution for your entrance door. The IP video door station can be operated as a stand-alone unit or integrated into an existing smart home platform. Existing, classic installations such as a door chime or an electric door and gate opener can also continue to be used with DoorBird and controlled via the app using a smartphone or tablet.

Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Door station made of 2 mm stainless steel V2A 1.4301.
- Interchangeable front panels powder-coated in RAL colour of your choice.
- Front panel with bell button in V2A 1.4301 stainless steel, 240 grit polished.
- Installation box made of 2 mm stainless steel V2A 1.4301, 240 grit polished.
- Dimensions of the bell plate: W 160 mm x H 260 mm x D 8 mm.
- Installation box dimensions: W 130 mm x H 230 mm x D 50 mm
- Optionally for flush-mounted or surface-mounted installation.
- DoorBird IP video door station D1100E and call button (small D11X) installed.

## Important information

### Camera or intercom preparation

**The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, fitting and installation.**

### Water protection

To achieve optimum water protection, the door station should be located under a canopy if possible.


## Product properties

|                                    |   |
|------------------------------------|---|
| <b>Surface/colour</b>              | RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), Brushed, RAL 9007 grey aluminium, RAL 9016 traffic white |
| <b>Series</b>                      | DIVISION  |
| <b>Connection technology</b>       | 2-wire, LAN   |
| <b>Number of bell push buttons</b> | 1 button  |
| <b>Functions</b>                   | Camera, Intercom  |
| <b>Material</b>                    | Stainless steel V2A 1.4301  |
| <b>House number</b>                | House number as laser engraving   |
| <b>Name labelling</b>              | Laser-engraved  |
| <b>Mounting type</b>               | Surface-mounted, Flush-mounted  |

## Dimensions

|                           |                       |
|---------------------------|-----------------------|
| <b>Width in mm</b>        | 130   160             |
| <b>Height in mm</b>       | 230   260             |
| <b>Depth in mm</b>        | 52,0                  |
| <b>Weight in kg</b>       | 4                     |
| <b>Delivery condition</b> | Delivery is assembled |

## Drawing

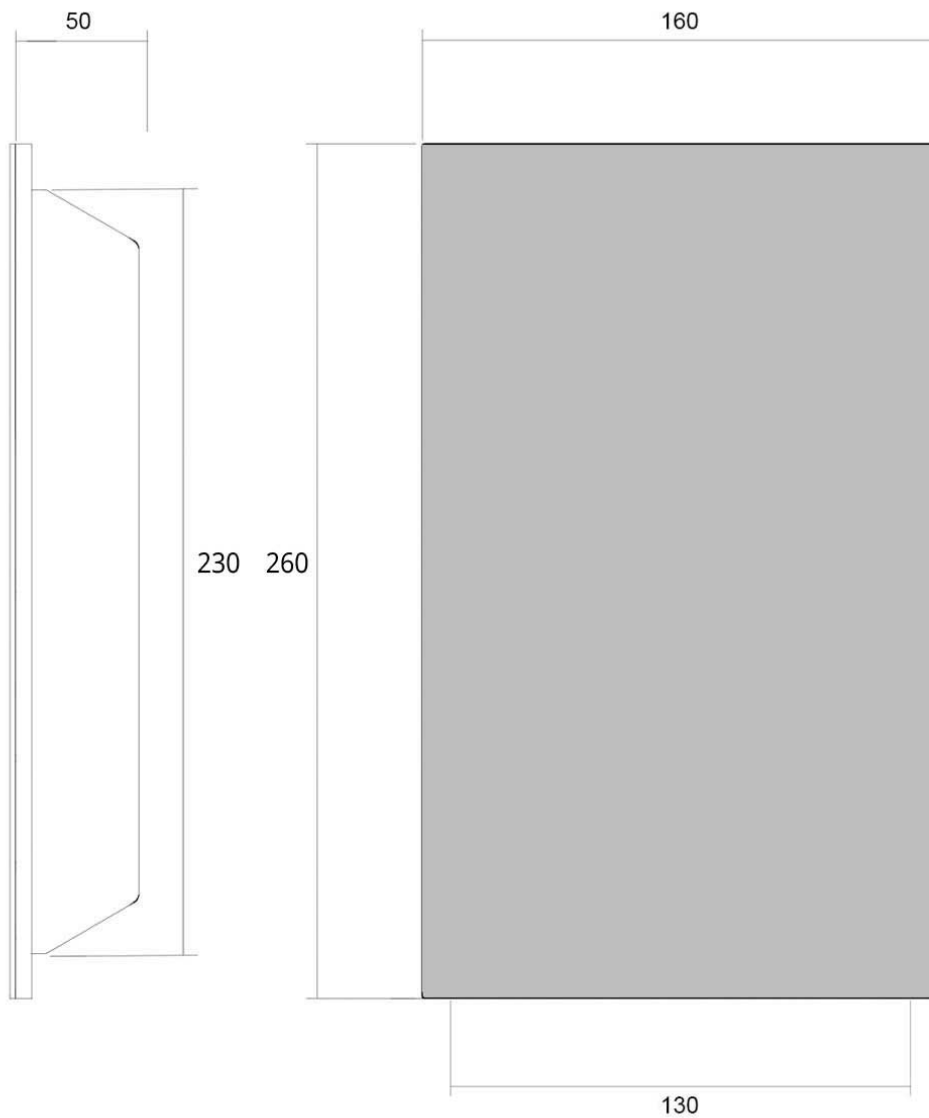

## More images

