

Design flush-mounted letterbox GOETHE UP lateral with newspaper compartment - RAL of your choice - LOXONE Intercom prepared | Left | with newspaper compartment | LOXONE intercom + code touch 2-way prepared

Product number 215-UP-1-SPSZF-LX-L-LOX2H



Product description

Design flush-mounted letterbox GOETHE UP lateral with newspaper compartment - RAL of your choice - LOXONE Intercom prepared

High-quality flush-mounted letterbox with newspaper compartment and LOXONE Intercom on the side in flush-mounted design. The modern GOETHE letterbox is ideal for the sophisticated entrance area. The linear design without a visible lock makes this letterbox look particularly elegant. The LOXONE Intercom can be inserted seamlessly into the flush-mounted design and replaced at any time. The preparation is intended for 1 piece LOXONE Intercom (incl. perforation for sound outlet) or 1 piece LOXONE Intercom (incl. perforation for sound outlet) + 1 piece LOXONE NFC Code Touch/Touch Pure.

The dimensions of the single box allow a capacity of approx. 16 litres, the large insertion guarantees no crumpled mail even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- Flush-mounted letterbox made entirely of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. So the mail cannot fall towards you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser inscription "ZEITUNG" (font ARIAL, if name/house number, then the same as your chosen font).
- Newspaper compartment can be opened from bottom to top.
- Functional box (BH 200x600mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optionally with house number, lasered or house number, backlit in white incl. EVN LED power supply unit / transformer IP65 12V/DC 0.1-4W for LED illumination of the house number.
- Optionally with name inscription, lasered or engraved (illuminated).
- Plaster cover frame made of 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- **WITHOUT LOXONE intercom/system components!**

Important information

Camera or call station preparation

We recommend that the electrical installation is always carried out by an electrician.

We offer the preparation of intercom stations from various manufacturers for our letterboxes. The preparation does not include any end devices, but only the provision of screw mounts, drill holes and perforations. This means that you can install your end device without any problems.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Functions	Newspaper compartment, Camera, Intercom, Fingerprint, Keypad
Functional box prepared for manufacturer	LOXONE
Name labelling	Laser-cut engraving, Nameplate, Laser-engraved, Illuminated laser-cut engraving
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Removal of mail	On the front
Number of letterboxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted


Dimensions

Height of single box in mm	BK 400.0 ZF 200.0
Width of single box in mm	400,0
Capacity in litres	BK 16.0 ZF 8.0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Height of letterbox in mm	External dimension 652.0 installation dimension 605.0
Width of letterbox system in mm	External dimension 652.0 installation dimension 605.0
Overall height in mm	recommended 1500.0 - 1700.0
Total width in mm	650,0
Depth in mm	100.0 installation dimension 103.5
Weight in kg	21
Delivery condition	Delivery is assembled

Drawing

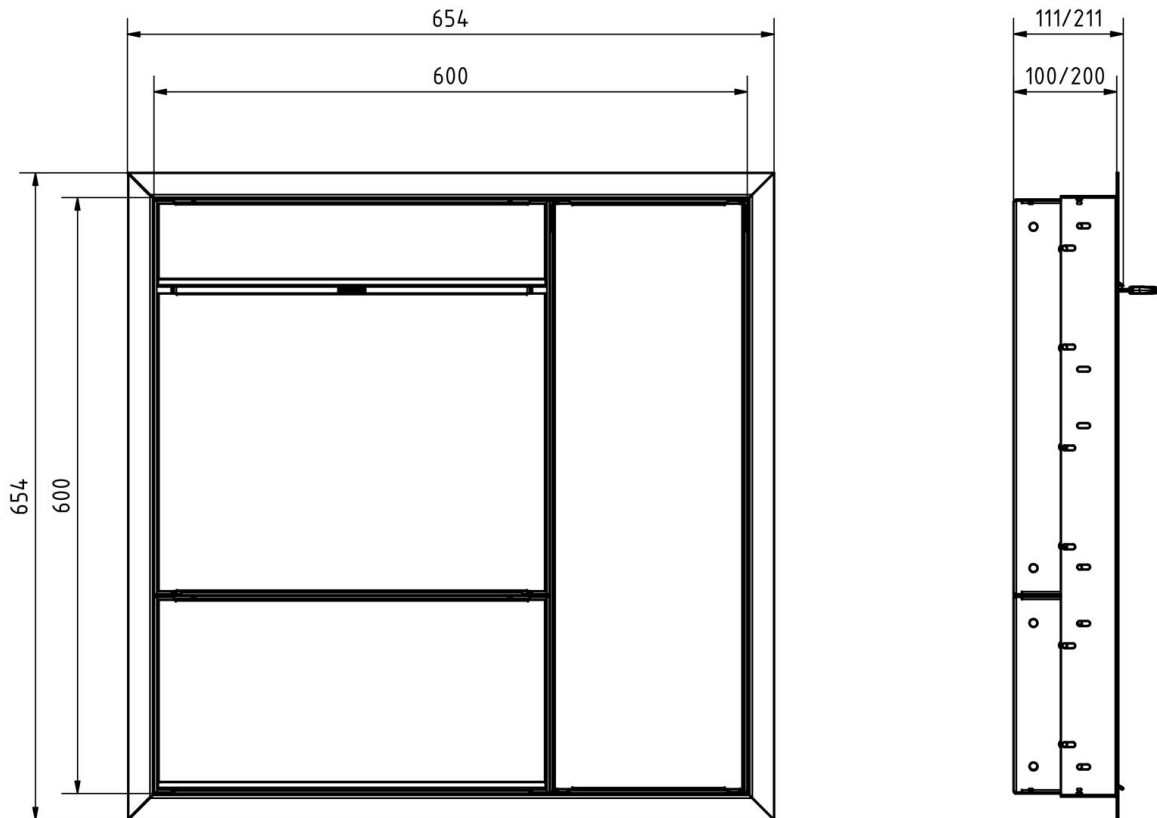

More images

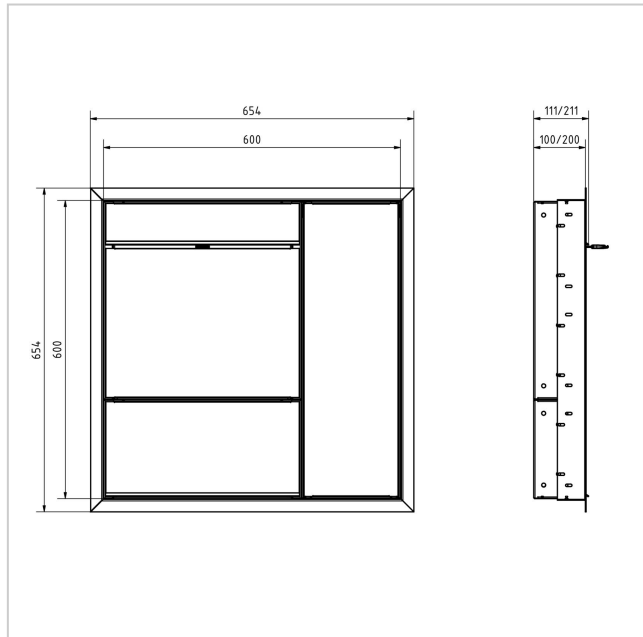

Push-Key-Schloss

Nur noch stecken!

