


2000mm for setting in concrete with cap, illuminated

Product number HF2000-60-STR-PUK

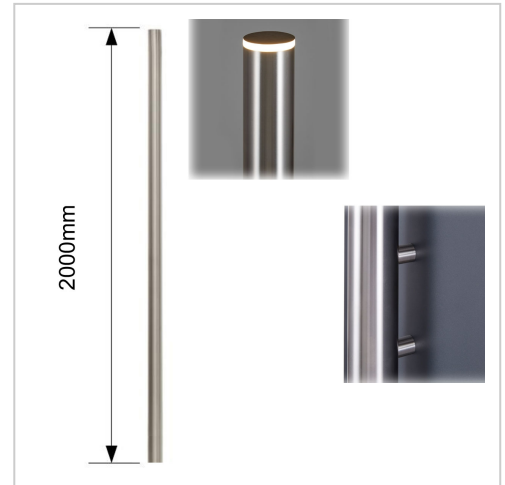

Product description

High-quality stand element made of V2A stainless steel, polished for setting in concrete. The elegant connecting elements are seamlessly attached so that no screws are visible. The letterbox is attached directly to the stand element via the letterbox. An illuminated LED tube end cap closes the upper end section of the stand element. The stand element is open at the bottom so that cable routing is possible without any problems. If cable routing is required (only for items with bell/intercom part), a connecting element is welded on so that a cable feed-through (always on the right, 14 mm) is possible.

Length 2000mm

Diameter 60.3 mm

Wall thickness 2 mm

Recommended inlet depth 350-500mm (this must be deducted from the length)

Converter 24V 0.84A 20.2W