

Free-standing GOETHE design parcel locker system with 2 letterboxes and 2 parcel boxes - lock system - RAL of your choice | with 2 letterboxes (2x1) | mail collection at the front | Paketfach 400x1200x400

Product number 215-STL-PK2-2BK



Product description

Free-standing GOETHE design parcel locker system with 2 letterboxes and 2 parcel boxes - lock system - RAL of your choice

Parcel delivery has changed dramatically in recent years - today's customers expect more flexibility and security than ever before. With the GOETHE® parcel letterbox from Briefkasten Manufaktur, you can rely on an optimum combination of innovative technology and outstanding design, manufactured from high-quality stainless steel and aluminium.

The GOETHE® parcel letterbox has a specially designed delivery lock. As soon as the parcel carrier places your parcel inside and closes the lock, the parcel automatically falls into the securely locked removal box below. After this process, the delivery lock is immediately ready for further deliveries and is automatically isolated from the removal box, guaranteeing maximum security for your parcels. A parcel box for the simple receipt of parcels, parcel receipt independent of the delivery agent! Any parcel delivery company (e.g. DHL, DPD, TNT, GLS, Hermes, etc.) can use this parcel box. The spacious interior of the GOETHE® parcel letterbox is designed to accommodate the DHL Paket M and even several smaller parcels. Depending on the placement of the size M DHL parcel, four such parcels can even be stored safely and conveniently.

The dimensions of the letterbox allow for a capacity of approx. 32 litres, and the large slot guarantees no crumpled mail, even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

Briefkasten Manufaktur attaches particular importance to the selection of high-quality materials. The use of stainless steel in the production of the GOETHE® parcel letter box ensures extremely high corrosion resistance and a strikingly attractive surface finish. Our quality assurance begins with the selection of our raw material suppliers and only ends when the parcel letter box arrives at your premises in the required quality. Rely on the GOETHE® parcel letterbox for a secure, flexible and stylish solution to your parcel delivery needs. Let yourself be convinced by a product that combines traditional craftsmanship with state-of-the-art technology - in the spirit of letterbox manufacturing.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- High-quality parcel locker system made of stainless steel and aluminium, powder-coated in the colour of your choice.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterboxes (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of choice.
- Innovative push-key lock with 2 keys each.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. This prevents the mail from falling towards you.
- Parcel boxes (BH 400x1200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser labelling.
- Parcel compartment volume: 128 litres, max. Parcel dimensions: 355 x 375 x 305 mm (WD), corresponding to parcel size M.
- Parcel flap with damping for quiet closing.
- Optimum rain protection thanks to rain guard edges and a rain cover made of 3 mm aluminium AlMg3 W19, powder-coated in RAL of your choice.
- Side panelling made of 3mm aluminium AlMg3 W19, powder-coated in RAL of your choice.
- Rear panel made of 1mm stainless steel 1.4301 V2A, powder-coated in RAL of your choice.
- Base made of 40x40x2mm stainless steel tube 1.4301 V2A, powder-coated in RAL of your choice.
- Invisible fastening in the column. The overall height is 1.65 m.

Important information

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is completely placed in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Functions	Newspaper compartment, Parcel compartment
Number of boxes	with 2 parcel boxes, with 2 letterboxes
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
Mounting type	Free-standing
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Boxes by volume	Jumbo > 30 litres

Dimensions

Height of single box in mm	BK 200.0 PK 1200.0
Width of single box in mm	400,0
Capacity in litres	BK 32.0 PK 128.0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	360,0
Overall height in mm	1450,0
Total width in mm	808,0
Depth in mm	400.0 + 25.0 Rain roof
Weight in kg	98
Delivery condition	Delivery is assembled

Drawing

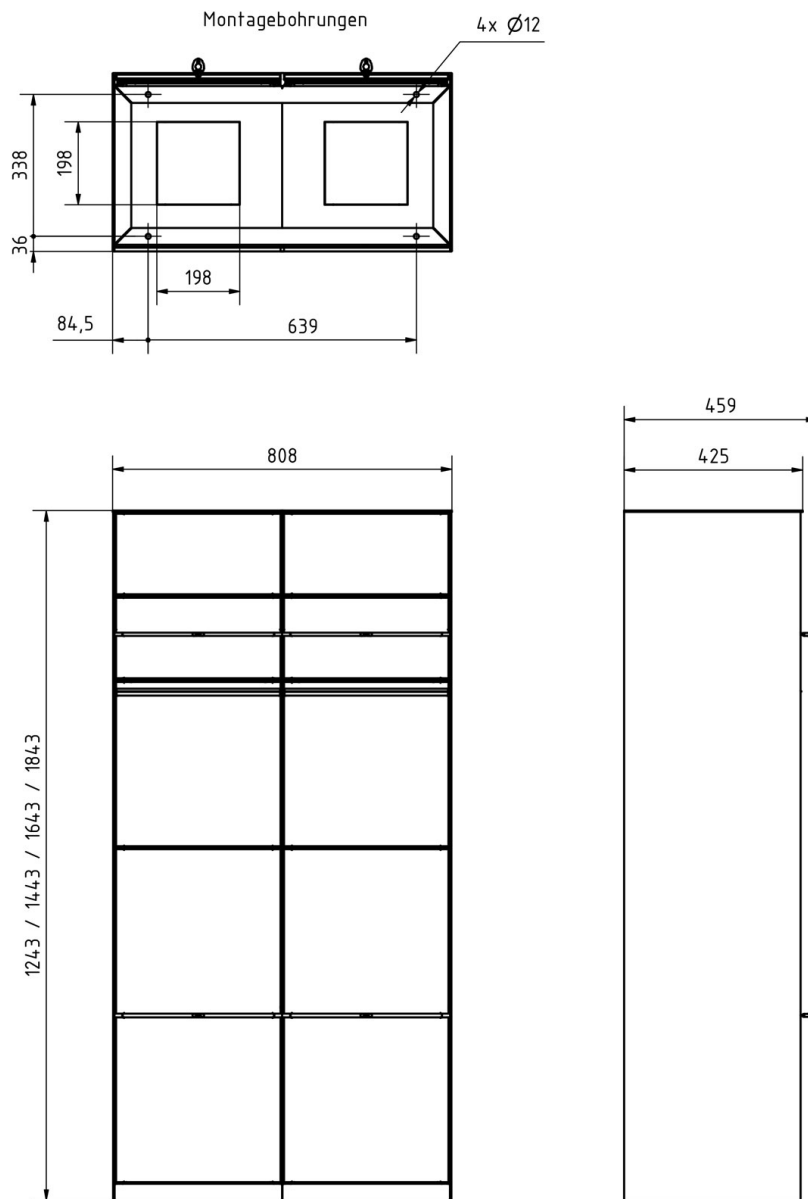

More images

