

Design surface-mounted newspaper box GOETHE AP - RAL of your choice

Product number 215-ZFAP



Product description

Design surface-mounted newspaper box GOETHE AP - RAL of your choice

The modern surface-mounted GOETHE newspaper box is ideal for sophisticated entrance areas. The linear design makes this newspaper box look particularly elegant.

This newspaper box is particularly convenient as the newspaper can be completely inserted. This means that the newspaper is protected from the weather and can be inserted without creasing. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is equipped with a high-quality stop damper to guarantee quiet closing. To remove the mail, the flap is simply opened upwards and the newspaper is conveniently removed.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel and aluminium. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- Stainless steel and aluminium newspaper box.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Newspaper box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser labelling "ZEITUNG".
- Newspaper box can be opened from bottom to top.
- Optimum rain protection thanks to rain run-off edges and a rain cover made of 3 mm aluminium AlMg3 W19, powder-coated in RAL of your choice.
- Side cladding made of 3 mm aluminium AlMg3 W19, powder-coated in RAL of your choice.
- Optional name lettering approx. 15-20mm high.
- Optional house number lettering approx. 70-80mm high.
- For wall mounting incl. standard plugs and screws.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Material	Aluminium AlMg3 W19, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Mounting type	Surface-mounted

Dimensions

Height of single box in mm	200,0
Width of single box in mm	400,0
Capacity in litres	8
Height of letterbox slot in mm	110,0
Width of letter slot in mm	360,0
Total width in mm	408,0
Depth in mm	100.0 + 25.0 Rain roof
Weight in kg	8
Delivery condition	Delivery is assembled

Drawing

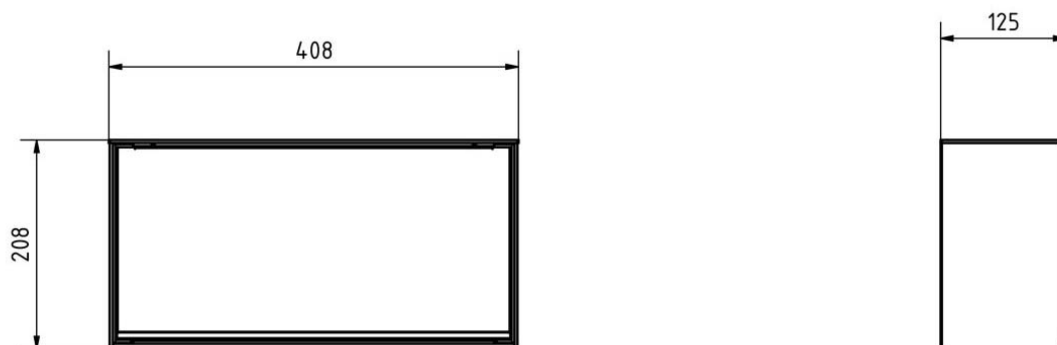

More images



