3er 1x3 fence mailbox freestanding design BASIC Plus 381XZ ST-R - RAL of your choice | ? Colour of your choice | with 3 letterboxes (1x3)

Product number 381XZ-3S



Product description

3x1 free-standing fence letter box design BASIC Plus 381XZ ST-R - RAL of your choice - removal from the rear

High-quality free-standing fence mailbox for 3 parties made in Germany by Briefkasten Manufaktur.

The letterboxes are made of stainless steel V2A, powder-coated in RAL colour, the stand elements are made of weather-resistant stainless steel V2A, polished. The very high-quality workmanship and the well thought-out concept make this free-standing letterbox our top seller. A rain drainage edge for optimum water protection, a continuous rubber lip for quiet insertion, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this free-standing letterbox. The side panelling with protruding rain cover made of V2A stainless steel offers optimum protection against the weather and guarantees a very long service life.

The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- 3-post letterbox made of V2A stainless steel, powder-coated in RAL colour
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letterboxes comply with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flap with sound-absorbing rubber seal for very quiet mail insertion.
- The door can be opened from left to right.
- Incl. 2 keys with key number, interchangeable nameplate (type 2) under the flap and post holder.
- Incl. side cladding + rain cover made of V2A stainless steel, powder-coated in RAL colour.
- The stand elements are made of 42.4 mm V2A stainless steel 1.4301, polished for screw mounting or setting in concrete.

Important information:

The post is only protected from moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water can still get in (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110

Product properties

Surface/colour RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), Brushed, RAL 9007 grey aluminium, RAL 9016 traffic white Series BASIC Boxes by Normal > 10 litres volume Name labelling Nameplate Mounting type Free-standing Material Stainless steel V2A 1.4301 Number of with 3 letterboxes boxes Removal of mail On the back

Dimensions


Height of single box in mm	330,0
Width of single box in mm	355,0
Capacity in litres	12
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	330,0
Width of letterbox system in mm	355,0
Overall height in mm	1200,0 1500,0
Total width in mm	535,0
Depth in mm	100.0 + 24.0 Rain roof
Weight in kg	13
Delivery condition	Supplied in blocks, stand elements / letterbox divided


www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110





4x Ø11

Drawing





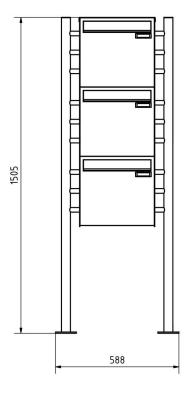



Briefkasten Manufaktur Lippe GmbH Werler Straße 60 32105 Bad Salzuflen www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110




More images



Briefkasten Manufaktur Lippe GmbH Werler Straße 60 32105 Bad Salzuflen www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110



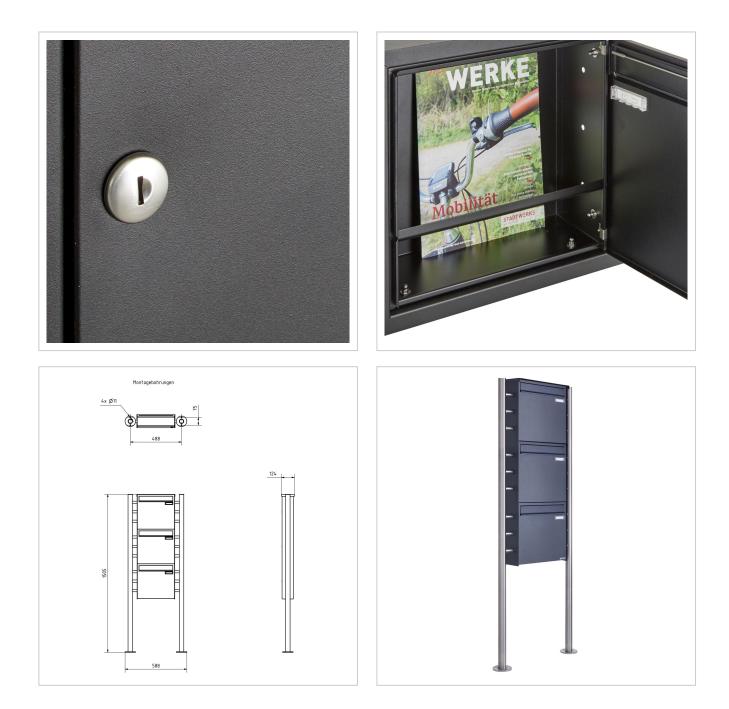

www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110





www.briefkasten-manufaktur.de info@briefkasten-manufaktur.de Tel.: +49 5222 807110