

Design wall light FISCHER MEDIUM 280x80 - 2-sided - stainless steel powder-coated - RAL of your choice | 280mm x 80mm | ? Colour of your choice

Product number 631R



Product description

Design wall light FISCHER MEDIUM 280x80 - 2-sided - powder-coated stainless steel - RAL colour of your choice

High-quality, powder-coated stainless steel wall light for indoor and outdoor use. This luminaire with warm white light colour has a light outlet on both the top and bottom.

- The wall light is made of cast aluminium, stainless steel and opal glass.
- Integrated LED module 2 x 7.8 W incl. converter, direct connection 230 V, 50 Hz, light colour warm white, 3000° K .
- Protective conductor connection.
- Protection class IP 44 - splash-proof.
- With cast aluminium mounting plate for fixing.
- 2 fixing holes Ø 6x10 in the wall plate, horizontal spacing 210mm, cable entry with cable grommet for connection cable max. 3 x 1.5mm² connection terminal 2 x 2.5mm.
- CE mark of conformity.
- Manufactured by Gebrüder Albert GmbH & Co KG Leuchtenfabrik - Quality Made in Germany (Fröndenberg).

Installation:

The national and international electronic safety regulations must be observed for the installation and operation of this luminaire. Loosen the wall plate from the luminaire fitting using the four hexagon socket set screws, pull the mains connection cable through the existing cable grommet and screw the wall plate to the mounting base. Establish the protective conductor connection and electrical connection to the terminal. Fix the luminaire fitting over the wall plate and tighten against it using the four hexagon socket set screws.


Product properties

Surface/colour	RAL 9005 deep black, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Protection type	IP44
Illuminants	2x LED, 7,8 Watt
Material	Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Protection class	I

Dimensions

Width in mm	205
Height in mm	105
Total width in mm	205
Depth in mm	90,0
Delivery condition	Supplied fully assembled

Drawing

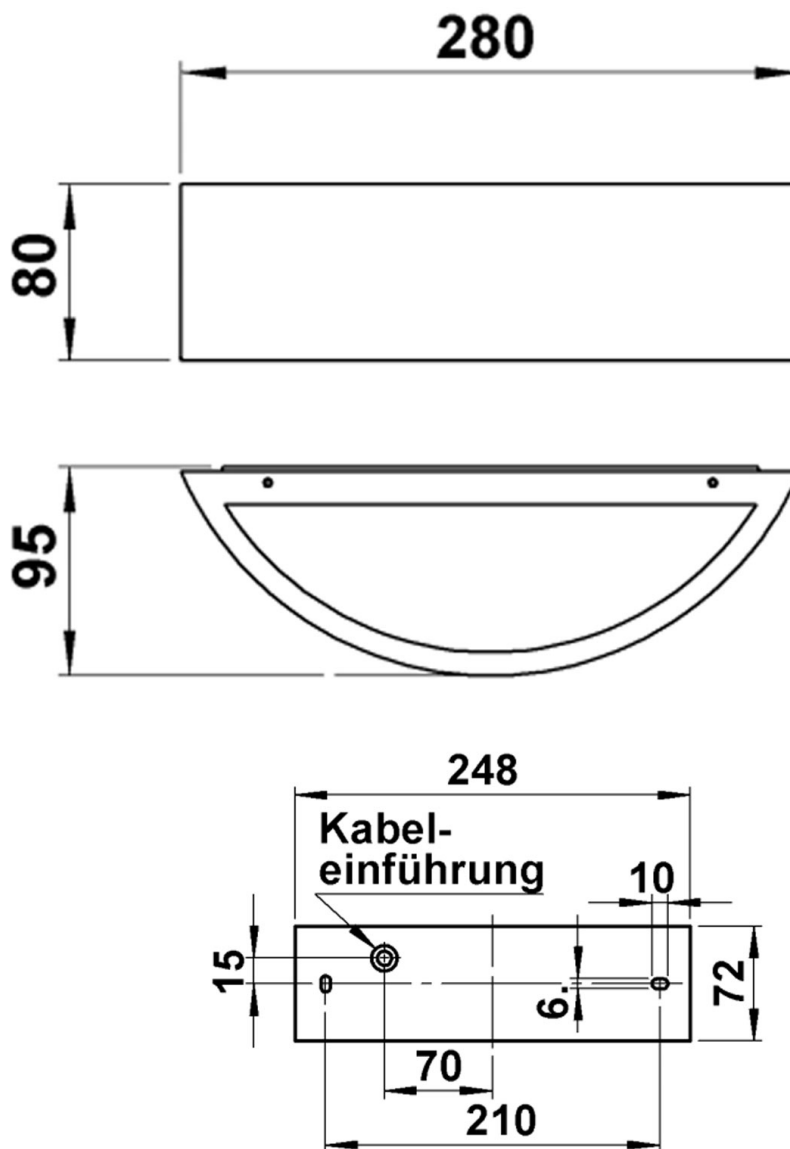

More images

