

Energy profile GRIMM 605 BIG with distribution box closed - SCHUKO - CEE - polished stainless steel | Stainless steel, ground

Product number 605B-GS-E-STEL-VA



Product description

Energy profile GRIMM 605 BIG with distribution box closed - SCHUKO - CEE

High-quality column for the internal mounting of socket strips. The pedestal is made entirely of stainless steel V2A 1.4301. This pillar is supplied without equipment components. Can be fitted with ready-to-connect socket strips (SCHUKO, CEE 16A 5 p 400V, CEE 16A 3 p 230V). Customised equipment possible on request.

Thanks to the installation box, the equipment components can be stored inside, protected from the weather. The cable is fed out of the lower opening when in use so that the door can be closed again. This guarantees a sleek and modern look and your equipment components are perfectly protected.

Thanks to the design, self-assembly is uncomplicated.

- High-quality pedestal made of stainless steel V2A 1.4301, optionally polished or powder-coated in RAL colour of your choice.
- Quality production - Made in Germany - Briefkasten Manufaktur Lippe.
- The fully welded pedestal is made of 2mm stainless steel V2A 1.4301. Overall height 1.70 m.
- Installation box made of 2mm stainless steel V2A 1.4301, optionally ground or powder-coated in RAL colour of your choice.
- Front removal door 365 mm x 637 mm, opens from left to right.
- The removal door is fitted with damped stainless steel hinges for extremely long service life.
- Optionally with lever lock, toggle lock or RFID lock.
- Invisible cable feed through the body possible.
- The pedestal is fitted with a base plate made of 10 mm V2A 1.4301 stainless steel. This is finished with a cover plate.


Product properties

Series	GRIMM
Charging connection	CEE, SCHUKO
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301
Surface/colour	Brushed

Dimensions

Height of single box in mm	710,0 750,0
Width of single box in mm	410,0 450,0
Capacity in litres	44
Overall height in mm	1700,0
Total width in mm	490.0 (base plate 580.0)
Depth in mm	150.0 (footplate 240.0)
Weight in kg	65
Delivery condition	Supplied fully assembled

Drawing

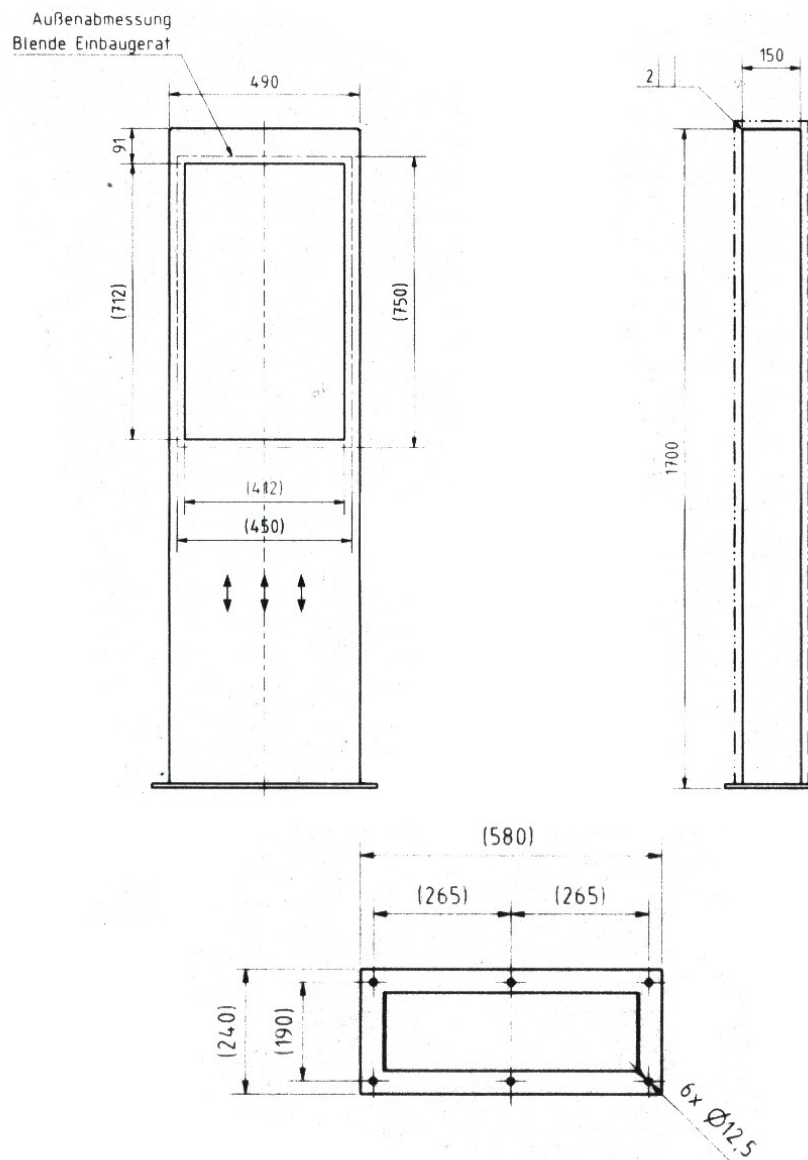

More images

