


# Design flush-mounted letterbox GOETHE UP - RAL of your choice - COMELIT switch on the side - VIDEO complete set Wifi | Right | 100mm depth

**Product number** 215-UP-1-SPS-KSCSWIFI-R-1

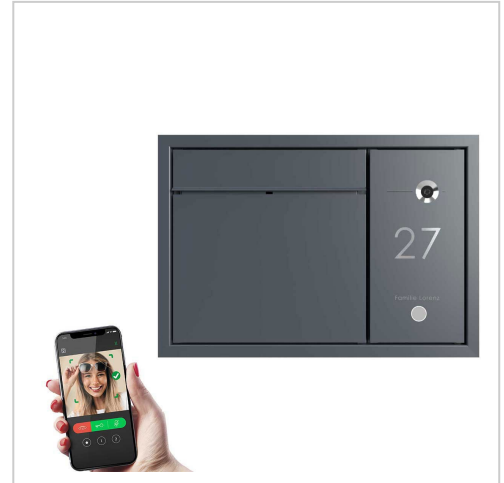

## Product description

### Design flush-mounted letterbox GOETHE UP - RAL of your choice - COMELIT Switch lateral - VIDEO complete set

High-quality flush-mounted letterbox with video intercom system in flush-mounted design. The modern GOETHE letterbox is ideal for the sophisticated entrance area. The linear design without a visible lock makes this letterbox look particularly elegant. Discover the fully integrated Comelit VIDEO complete set, a top solution in the world of video intercom systems. This state-of-the-art system offers advanced functions, including face recognition, voice control and convenient operation via smartphone app. Perfectly pre-programmed, it is easy to install - just connect two wires and the system is ready to go! Depending on your needs, the set is available either with a gateway without a home station (home stations can be optionally extended) or with a WiFi-enabled home station to ensure maximum flexibility and customisation to your individual requirements.

The dimensions of the individual box allow a capacity of approx. 16 or 32 litres, while the large insertion slot guarantees no crumpled mail, even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

**Protected utility model according to DPMA file number DE: 20 2021 101 679.5**

- Flush-mounted letterbox made entirely of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. This prevents the mail from falling towards you.
- Function box (BH 200x400mm) made of stainless steel 1.4016 (magnetic stainless steel), powder-coated in RAL colour of your choice.
- 8-12V DC short-stroke bell push-button with white LED ring lighting.
- Optionally with name labelling approx. 10-20mm high.
- Optionally with house number lettering approx. 60-80mm high.
- Optimum rain protection thanks to rain run-off edges.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.

## Important information

Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GOETHE
<b>Connection technology</b>	2-wire
<b>Number of bell push buttons</b>	1 button
<b>Functions</b>	Camera, Intercom
<b>Functional box prepared for manufacturer</b>	Comelit
<b>Material</b>	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
<b>House number</b>	House number as laser engraving
<b>Name labelling</b>	Laser-engraved
<b>Removal of mail</b>	On the front
<b>Number of boxes</b>	with 1 letterbox
<b>Boxes by volume</b>	Large > 16 litres
<b>Mounting type</b>	Flush-mounted


## Dimensions

<b>Height of single box in mm</b>	400,0
<b>Width of single box in mm</b>	BK 400.0   FK 200.0
<b>Capacity in litres</b>	16,0   32,0
<b>Height of letterbox slot in mm</b>	35,0
<b>Width of letter slot in mm</b>	360,0
<b>Height of letterbox in mm</b>	External dimension 452.0   installation dimension 410.0
<b>Width of letterbox system in mm</b>	External dimension 652.0   installation dimension 610.0
<b>Overall height in mm</b>	recommended 1400.0 - 1600.0
<b>Total width in mm</b>	652,0
<b>Depth in mm</b>	100.0   installation dimension 103.5   200.0   installation dimension 203.5
<b>Weight in kg</b>	14
<b>Delivery condition</b>	Delivery is assembled

## Drawing

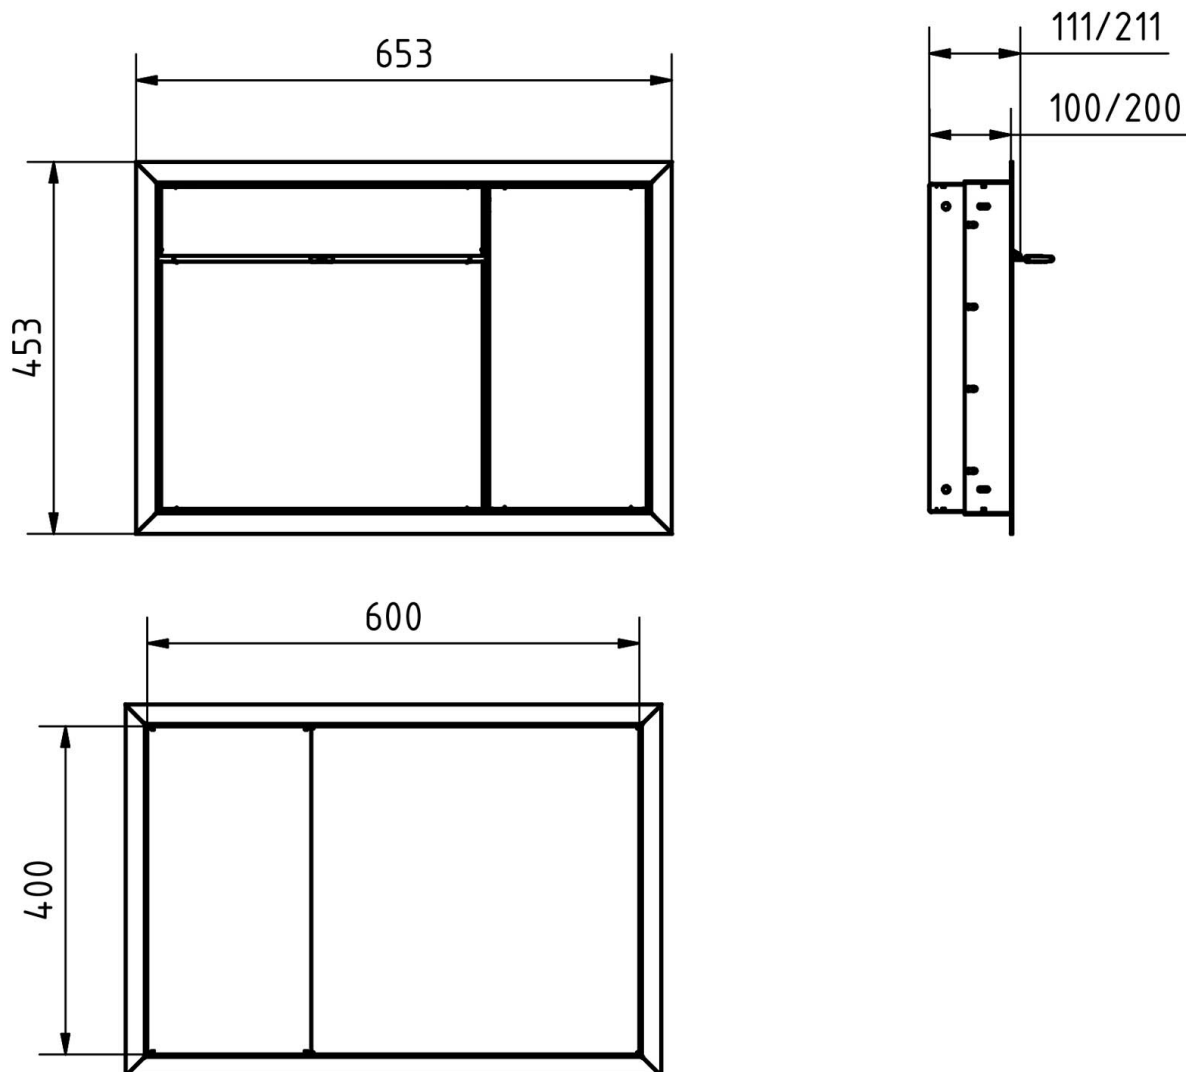

## More images

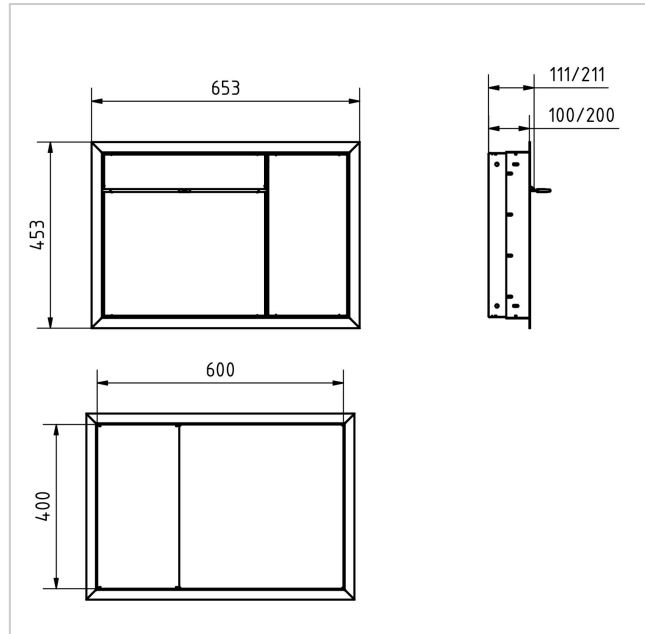

## Push-Key-Schloss

Nur noch stecken!



