

# Design flush-mounted newspaper box GOETHE UP - RAL of your choice

**Product number** 215-ZFUP



## Product description

### Design flush-mounted newspaper box GOETHE UP - RAL of your choice

The modern flush-mounted GOETHE newspaper box is ideal for the sophisticated entrance area. The linear design makes this newspaper box look particularly elegant.

This newspaper box is particularly convenient as the newspaper can be completely inserted. This means that the newspaper is protected from the weather and can be inserted without creasing. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is equipped with a high-quality stop damper to guarantee quiet closing. To remove the mail, the flap is simply opened upwards and the newspaper is conveniently removed.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

#### **Protected utility model according to DPMA file number DE: 20 2021 101 679.5**

- Newspaper box made entirely of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Newspaper box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser labelling "ZEITUNG".
- Newspaper box can be opened from bottom to top.
- Optional name lettering approx. 15-20 mm high.
- Optional house number lettering approx. 70-80mm high.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.

#### **Important information:**

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GOETHE
<b>Material</b>	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
<b>House number</b>	House number as laser engraving
<b>Name labelling</b>	Laser-engraved
<b>Removal of mail</b>	On the front
<b>Mounting type</b>	Flush-mounted

## Dimensions

<b>Height of single box in mm</b>	200.0   installation dimension 203.0   external dimension 250.0
<b>Width of single box in mm</b>	400.0   installation dimension 403.0   external dimension 450.0
<b>Capacity in litres</b>	8
<b>Height of letterbox slot in mm</b>	110,0
<b>Width of letter slot in mm</b>	360,0
<b>Total width in mm</b>	450,0
<b>Depth in mm</b>	100.0   installation dimension 103.5
<b>Weight in kg</b>	7
<b>Delivery condition</b>	Delivery is assembled

## Drawing

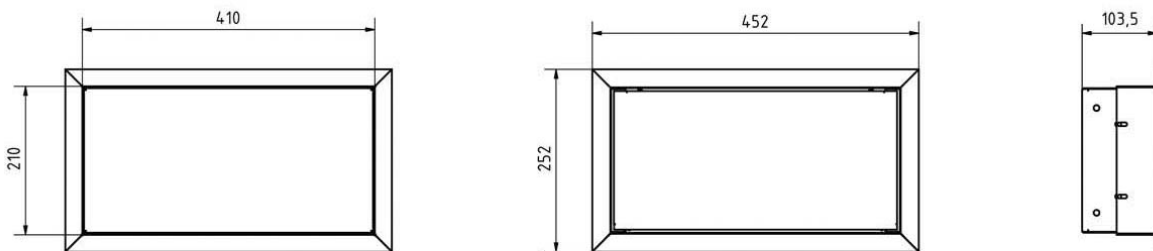

## More images



