

Design flush-mounted letterbox GRIMM - colour of your choice with Ekinex Dico IP video intercom system | ? Colour of your choice | Top | Ekinex DICO | Flush-mounted

Product number 562-UP-SPO-1-SF-EKX



Product description

Design letterbox GRIMM with Ekinex Dico IP video intercom - a masterpiece of letterbox manufacturing

The GRIMM designer flush-mounted letterbox combines modern design with first-class workmanship - ideal for discerning building owners and architects who are looking for an elegant solution for integrating DoorBird. Manufactured from high-quality stainless steel and completely "Made in Germany" by the letterbox manufacturer Lippe, this model stands for durability, functionality and a stylish look. The powder-coated front panel made of 2 mm V2A stainless steel impresses with its timeless appearance and high corrosion resistance.

The seamless integration of the Ekinex IP Dico video intercom system with the Delégo panel in 4, 8 or 10 inch sizes is particularly noteworthy. This high-quality solution offers modern, IP-based door communication with touch operation, intelligent control and brilliant image and sound quality. Precise integration into the front panel creates a harmonious overall look - perfectly matched to the architecture of modern residential and commercial buildings. The Delégo panels enable convenient control directly at the door or centrally in the building and offer a wide range of options for building networking.

The GRIMM letterbox is not only a visual highlight, it is also at the forefront in terms of functionality and quality. Thanks to the innovative push-key lock, the letterbox can be operated easily and conveniently with one hand. Open the door with one push and close the door without using a key. The lock is optimally protected from the weather. The letterbox also features an intelligent removal system: the door opens from top to bottom, ensuring that the mail remains securely in the box and cannot fall towards you. Mail is also conveniently inserted from the front, with high-quality axle dampers ensuring that the flap closes gently. The GRIMM is particularly unique thanks to its double box system: the flush-mounted box can be installed during the shell construction phase, while the front panel is only fitted once the construction work has been completed - for maximum flexibility in the future and protection from dirt and dust during the construction phase. The plaster box is made of stainless steel and has pre-punched cable inlets on all sides to allow easy electrical installation.

Thanks to the DIN/EN 13724 standard, the GRIMM is ideal for large letters in C4 format, which can be inserted without creasing. The GRIMM® letterbox impresses with its durable quality, timeless design and sophisticated functionality.

- High-quality letterbox made entirely of stainless steel for flush mounting.
- Front panel made of 2 mm stainless steel V2A 1.4301, powder-coated in the colour of your choice.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Integrated Ekinex video intercom system Dico IP door phone 5" (Artn.Nr. EK-5DP-VI) with Delégo panel, available in 4, 8 or 10 inch sizes.
- Innovative push-key lock including 2 keys with key number, convenient locking without key, optimally protected from the weather.
- The removal door with opening limiter opens from top to bottom to prevent mail from falling towards you.
- Front mail slot with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724-compliant letterbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape - even large letters remain intact. Additional stainless steel removal protection integrated.
- Optimum weather protection thanks to offset cover.
- Double box system: Ideal for flush mounting. The cover can be easily installed once the construction work is complete.
- Flush-mounted box made of stainless steel ##### (stainless, magnetic stainless steel) with pre-punched cable inlets on all sides.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is completely placed in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

| | |
|---|--|
| Surface/colour | RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white |
| Series | GRIMM |
| Connection technology | LAN |
| Number of bell push buttons | 1 button, 2 buttons, 3 buttons, 4 buttons, 5 buttons, 6 buttons, 7 buttons, 8 buttons, 9 buttons, 10 buttons, 11 buttons, 12 buttons, up to 100 bell buttons, 13 buttons, 14 buttons, 15 buttons, 16 buttons, 17 buttons, 18 buttons, 19 buttons, 20 buttons, 21 buttons, 22 buttons, 23 buttons, 24 buttons |
| Functions | Camera, Intercom, Keypad, Monitor, Motion detector |
| Functional box prepared for manufacturer | Ekinex |
| Material | Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel) |
| Removal of mail | On the front |
| Number of boxes | with 1 letterbox |
| Boxes by volume | Large > 16 litres |
| Mounting type | Flush-mounted |

Dimensions

| | |
|---------------------------------|---|
| Height of single box in mm | 460,0 |
| Width of single box in mm | 560,0 |
| Capacity in litres | 26,0 |
| Height of letterbox slot in mm | 35,0 |
| Width of letter slot in mm | 325,0 |
| Height of letterbox in mm | External dimension 750.0 installation dimension 710.0 |
| Width of letterbox system in mm | External dimension 450.0 installation dimension 410.0 |
| Depth in mm | 150,0 |
| Weight in kg | 19 |
| Delivery condition | Delivery is assembled |

Drawing

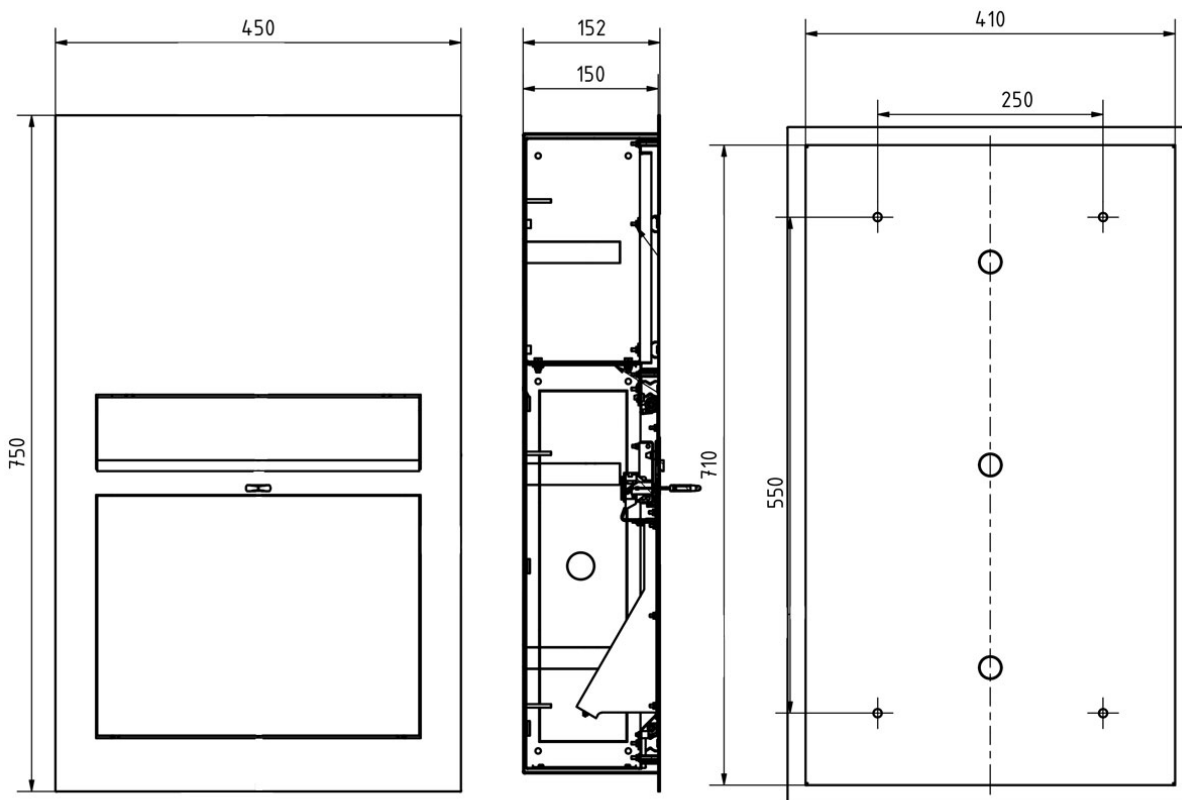

More images

