

Design flush-mounted letterbox GRIMM - Colour of your choice - GIRA System 106 - Intercom system - AUDIO complete set | Gira System 106 complete set audio | ? Colour of your choice | Top | Flush-mounted

Product number 562-UP-SPO-1-SF-GI106KSA



Product description

Design letterbox GRIMM with GIRA System 106 intercom - A masterpiece of letterbox manufacturing

The GRIMM designer flush-mounted letterbox combines modern design with first-class workmanship - ideal for discerning building owners and architects who are looking for an elegant solution for integrating the Gira System 106. Manufactured from high-quality stainless steel and completely "Made in Germany" by the letterbox manufacturer Lippe, this model stands for durability, functionality and a stylish look. The powder-coated front panel made of 2 mm stainless steel V2A in the colour of your choice impresses with its timeless appearance and high corrosion resistance. The flush-mounted design enables seamless integration of up to three GIRA 106 system modules via a sophisticated mounting system. 3 GIRA system modules are included, so the letterbox can be used directly. The matching GIRA home station and the control unit to complete this letterbox are included. The modules can be replaced at any time thanks to the simple mounting system.

The GRIMM® letterbox is not only a visual highlight, but also at the forefront in terms of functionality and quality. Thanks to the innovative push-key lock, the letterbox can be operated easily and conveniently with one hand. Open the door with one push and close the door without using a key. The lock is optimally protected from the weather. The letterbox also offers an intelligent removal system: the door opens from top to bottom, ensuring that the mail remains securely in the box and cannot fall towards you. Mail is also conveniently inserted from the front, with high-quality axle dampers ensuring that the flap closes gently. The GRIMM is particularly unique thanks to its double box system: the flush-mounted box can be installed during the shell construction phase, while the front panel is only fitted once the construction work has been completed - for maximum flexibility in the future and protection from dirt and dust during the construction phase. The plaster box is made of stainless steel and has pre-punched cable inlets on all sides to enable easy electrical installation.

Thanks to the DIN/EN 13724 standard, the GRIMM is ideal for large letters in C4 format, which can be inserted without creasing. The GRIMM letterbox impresses with its durable quality, timeless design and sophisticated functionality.

- High-quality letterbox made entirely of stainless steel for flush mounting.
- Front panel made of 2 mm stainless steel V2A 1.4301, powder-coated.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Incl. GIRA home station & control unit enclosed, System 106 door station module & info or dummy module installed.
- Innovative push-key lock including 2 keys with key number, convenient locking without key, optimally protected from the weather.
- The removal door with opening limiter opens from top to bottom to prevent mail from falling towards you.
- Front mail slot with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724-compliant letterbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape - even large letters remain intact. Additional stainless steel removal protection integrated.
- Optimum weather protection thanks to offset cover.
- Double box system: Ideal for flush mounting. The cover can be easily installed once the construction work is complete.
- Flush-mounted box made of stainless steel 1.4016 (stainless, magnetic stainless steel) with pre-punched cable inlets on all sides.

GIRA not found or type unknown

Info module Gira System 106 - 5560 920

- For house numbers that need to be clearly visible.

Door station module Gira System 106 - 5565 920

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with power via the door station module.

Surface-mounted home station Gira 1250XX

- Completely pre-assembled surface-mounted home station for quick and clean installation.
- Design diversity through integration into the switch range, resulting in a uniform appearance of door communication and electrical installation.
- Installation both with and without cover frame.
- Simple installation thanks to plug-in screw terminals on the mounting plate. Contact is made to the home station when the home station is plugged onto the mounting plate.
- Easy removal of the home station during renovation work.
- Fixing holes for mounting.
- Signal transmission and power supply to the home station via reverse-polarity protected and short-circuit-proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Ring tone differentiation between door call, internal call and storey call.
- Choice of five different ring tone melodies that can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise cancellation).
- Enforcement function for loud ambient noise during voice communication.
- Listen-in blocking.
- Operating buttons with integrated LEDs for status display.

Audio REG control device Gira 128700

- Supply of the reverse-polarity protected and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door release programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for the power supply of a standard electric strike.
- Permanent AC 12 V output for supplying power to a DCS-TC gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is completely placed in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GRIMM
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Dimensions

Height of single box in mm	460,0
Width of single box in mm	410,0
Capacity in litres	26,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	External dimension 750.0 installation dimension 710.0
Width of letterbox system in mm	External dimension 450.0 installation dimension 410.0
Depth in mm	150,0
Weight in kg	19
Delivery condition	Delivery is assembled

Drawing

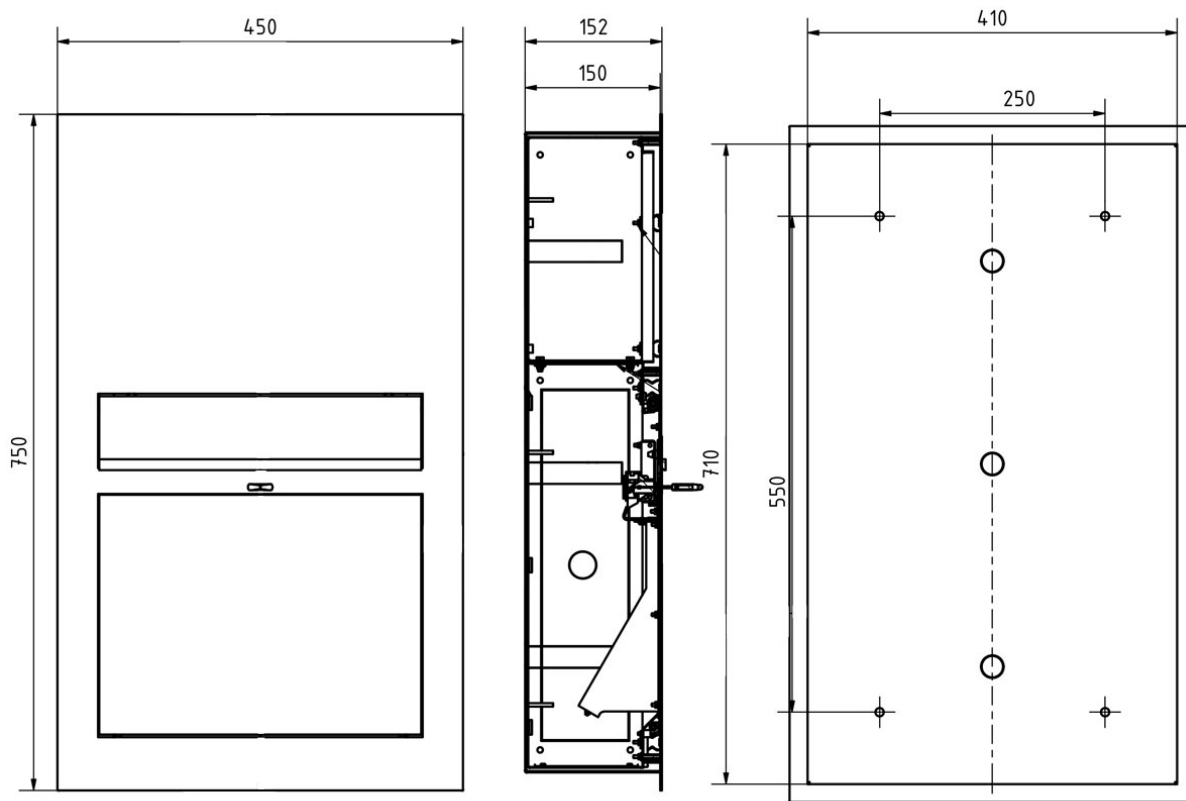

More images



