

Design letterbox pedestal GOETHE with newspaper compartment - RAL of your choice - GIRA System 106 - AUDIO complete set | Gira System 106 complete set audio

Product number 215-STL-160-1ZFS-KSAG1106



Product description

Design letterbox pedestal GOETHE with newspaper compartment - RAL of your choice - GIRA System 106 - AUDIO complete set

High-quality letterbox pedestal with newspaper compartment and seamlessly integrated Gira System 106 in flush-mounted design. The modern GOETHE letterbox is ideal for the sophisticated entrance area. The linear design without a visible lock gives this letterbox a particularly elegant appearance. 3 GIRA system modules are included, so the letterbox can be used directly. The matching GIRA home station and the control unit to complete this letterbox are included. The modules can be replaced at any time thanks to the simple mounting system.

The dimensions of the individual box allow a capacity of approx. 16 litres, and the large insertion slot guarantees no crumpled mail, even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel and aluminium. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- High-quality letterbox pillar made of stainless steel and aluminium.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. So the mail cannot fall towards you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser inscription "ZEITUNG" (font ARIAL, if name/house number, then the same as your chosen font).
- Newspaper compartment can be opened from bottom to top.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Doorbell plate made of stainless steel, powder-coated in RAL colour. A bell is lasered onto the bell plate for better recognisability.
- Optionally with lasered name lettering (a house number can also be added here).
- Optionally with laser-engraved house number (a name can also be added here).
- Optimum rain protection thanks to rain guard edges and a rain roof made of 3 mm aluminium AIMg3 W19, powder-coated in RAL of your choice.
- Side cladding made of 3 mm aluminium AIMg3 W19, powder-coated in RAL of your choice.
- Rear panel and base plate made of 6mm aluminium AIMg3 W19, powder-coated in RAL of your choice.
- Invisible fastening in the column thanks to reinforced base plate.
- Invisible cable feed through the body possible. The overall height is 1.65 m.
- Incl. GIRA home station & control unit enclosed, System 106 door station module & info or dummy module installed.

GIRA not found or type unknown

Info module Gira System 106 - 5560 920, installed

- For house numbers that should be clearly visible.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with power via the door station module.

Surface-mounted home station Gira 1250XX, enclosed

- Completely pre-assembled surface-mounted home station for quick and clean installation.
- Design diversity through integration into the switch range, resulting in a uniform appearance of door communication and electrical installation.
- Installation both with and without cover frame.
- Simple installation thanks to plug-in screw terminals on the mounting plate. Contact is made to the home station when the home station is plugged onto the mounting plate.
- Easy removal of the home station during renovation work.
- Fixing holes for mounting.
- Signal transmission and power supply to the home station via reverse-polarity protected and short-circuit-proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Ring tone differentiation between door call, internal call and storey call.
- Choice of five different ring tone melodies that can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise cancellation).
- Enforcement function for loud ambient noise during voice communication.
- Listen-in blocking.
- Operating buttons with integrated LEDs for status display.

Audio REG control device Gira 128700, enclosed

- Supply of the reverse-polarity protected and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door release programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for the power supply of a standard electric strike.
- Permanent AC 12 V output for supplying power to a DCS-TC gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

| | |
|---|--|
| Surface/colour | RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white |
| Series | GOETHE |
| Connection technology | 2-wire |
| Number of bell push buttons | 1 button |
| Functions | Newspaper compartment, Intercom |
| Functional box prepared for manufacturer | GIRA |
| Material | Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel) |
| Mounting type | Free-standing |
| House number | House number as laser engraving |
| Name labelling | Laser-engraved |
| Removal of mail | On the front |
| Number of boxes | with 1 letterbox |
| Boxes by volume | Large > 16 litres |


Dimensions

| | |
|---------------------------------|------------------------|
| Height of single box in mm | BK 400.0 ZF 200.0 |
| Width of single box in mm | 400,0 |
| Capacity in litres | BK 16.0 ZF 8.0 |
| Height of letterbox slot in mm | 35,0 |
| Width of letter slot in mm | 360,0 |
| Height of letterbox in mm | 800,0 |
| Width of letterbox system in mm | 400,0 |
| Overall height in mm | 1614,0 |
| Total width in mm | 408,0 |
| Depth in mm | 100.0 + 25.0 Rain roof |
| Weight in kg | 45 |
| Delivery condition | Delivery is assembled |

Drawing

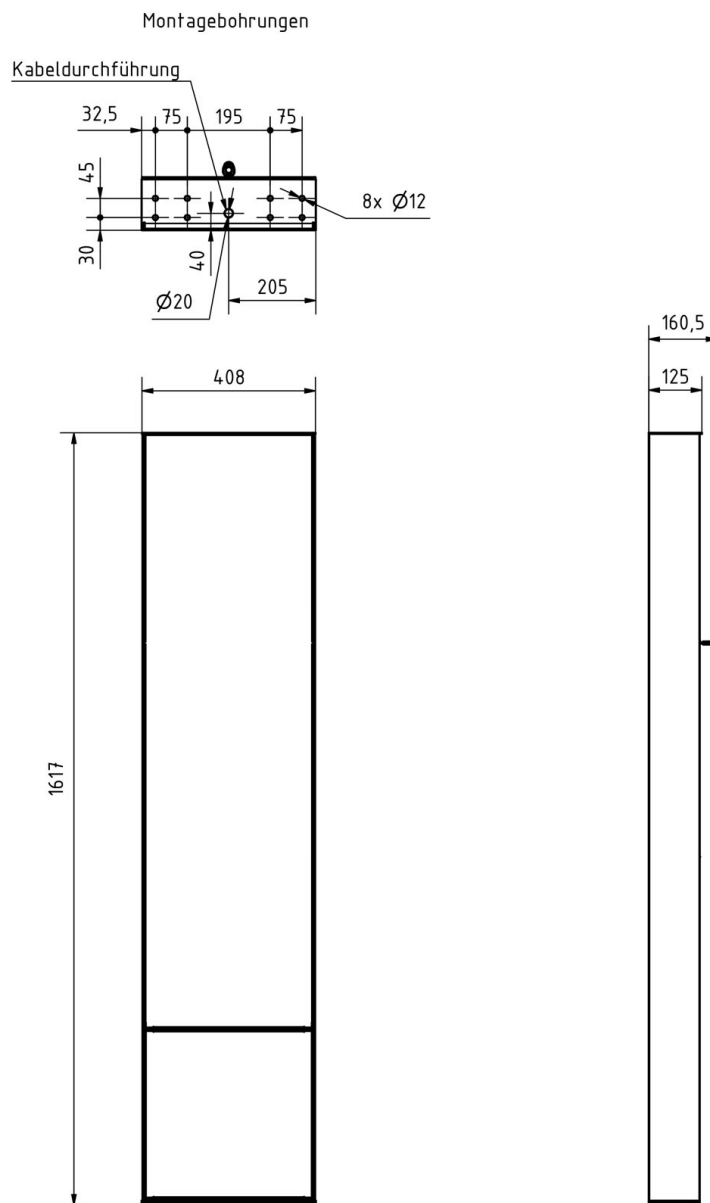

More images

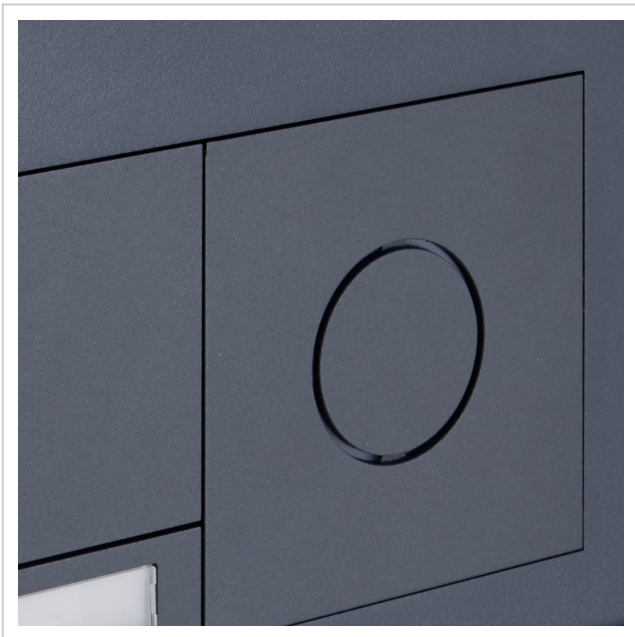

Push-Key-Schloss

Nur noch stecken!

