

Design letterbox stele GRIMM - colour of your choice with COMELIT Ultra - VIDEO set | Comelit Ultra | ? Colour of your choice | mail collection at the front

Product number 562-STL-SPO-1-SF-CSU



Product description

Design letterbox pillar GRIMM with Comelit video door intercom - modern technology meets timeless design

The GRIMM letterbox column combines modern design, precise workmanship and high-quality materials - ideal for builders, architects and homeowners looking for a free-standing, elegant and durable solution with an integrated Comelit video door intercom. Made from robust stainless steel and completely "Made in Germany" by the letterbox manufacturer Lippe, this pillar stands for quality, functionality and timeless design. The powder-coated front panel made of 2 mm V2A stainless steel impresses with its high corrosion resistance and clear lines that blend harmoniously into any modern architecture.

The Comelit Ultra video door intercom takes centre stage, with a choice of 2-wire technology or ViP (IP technology). Both systems enable convenient, secure and networked door communication. Visitors can be seen and spoken to at any time via the Comelit app and doors or gates can be opened if required - whether at home or on the move. The GRIMM letterbox column thus combines modern technology with maximum ease of use.

The letterbox unit impresses with its sophisticated design and convenient handling. The push-key lock allows one-handed operation: opening by pressing, locking without a key - weather-protected and user-friendly. The mail removal door opens from top to bottom so that the mail remains securely in the compartment. The front insertion is supported by axle dampers, which ensure that the flap closes quietly and gently.

The GRIMM pedestal is equipped with a double box system: The inner body can be installed during the construction phase, while the front panel is only fitted once the work has been completed. This means that the technology remains protected during the construction phase and subsequent adjustments can be made without any problems. The stainless steel plaster box has pre-punched cable inlets on all sides for straightforward electrical installation.

The GRIMM letterbox column fulfils the requirements of DIN/EN 13724 and is therefore suitable for letters in C4 format - without creasing or damage. Quality, durability and precision take centre stage here, as does a clear, modern look.

- High-quality letterbox pillar made entirely of V2A stainless steel for free-standing installation.
- Front panel made of 2 mm stainless steel V2A 1.4301, powder-coated in the colour of your choice.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Integrated Comelit Ultra in two modern connection variants - 2-wire technology and ViP (IP technology). Both systems impress with their high flexibility, simple installation and future-proof network integration.
- Innovative push-key lock including 2 keys with key number, convenient locking without a key, optimally protected from the weather.
- The removal door with opening limiter opens from top to bottom to prevent mail from falling towards you.
- Front mail slot with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724-compliant letterbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape - even large letters remain intact. Additional stainless steel removal protection integrated.
- Optimum weather protection thanks to offset cover.
- Double box system: The front panel can be easily installed after completion of the construction work and replaced at any time.
- The fully welded upright is made of 2 mm V2A stainless steel 1.4301, powder-coated in the colour of your choice. Construction height is 1.70 m.
- Invisible cable feed through the body is possible.
- The pedestal is fitted with a VA base plate. This is 10 mm thick and is finished with a cover plate. This conceals the fixing plugs.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is completely placed in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GRIMM
Connection technology	2-wire, LAN
Number of bell push buttons	1 button
Functions	Camera, Intercom, Fingerprint, Keypad
Functional box prepared for manufacturer	Comelit
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres

Dimensions

Height of single box in mm	External dimension 750.0 installation dimension 710.0
Width of single box in mm	External dimension 450.0 installation dimension 410.0
Capacity in litres	26,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	External dimension 750.0 installation dimension 710.0
Width of letterbox system in mm	External dimension 450.0 installation dimension 410.0
Overall height in mm	1700,0
Total width in mm	Body 490.0 Base plate 580.0
Depth in mm	Korpuss 150.0 Base plate 242.0
Weight in kg	65
Delivery condition	Delivery is assembled

Drawing

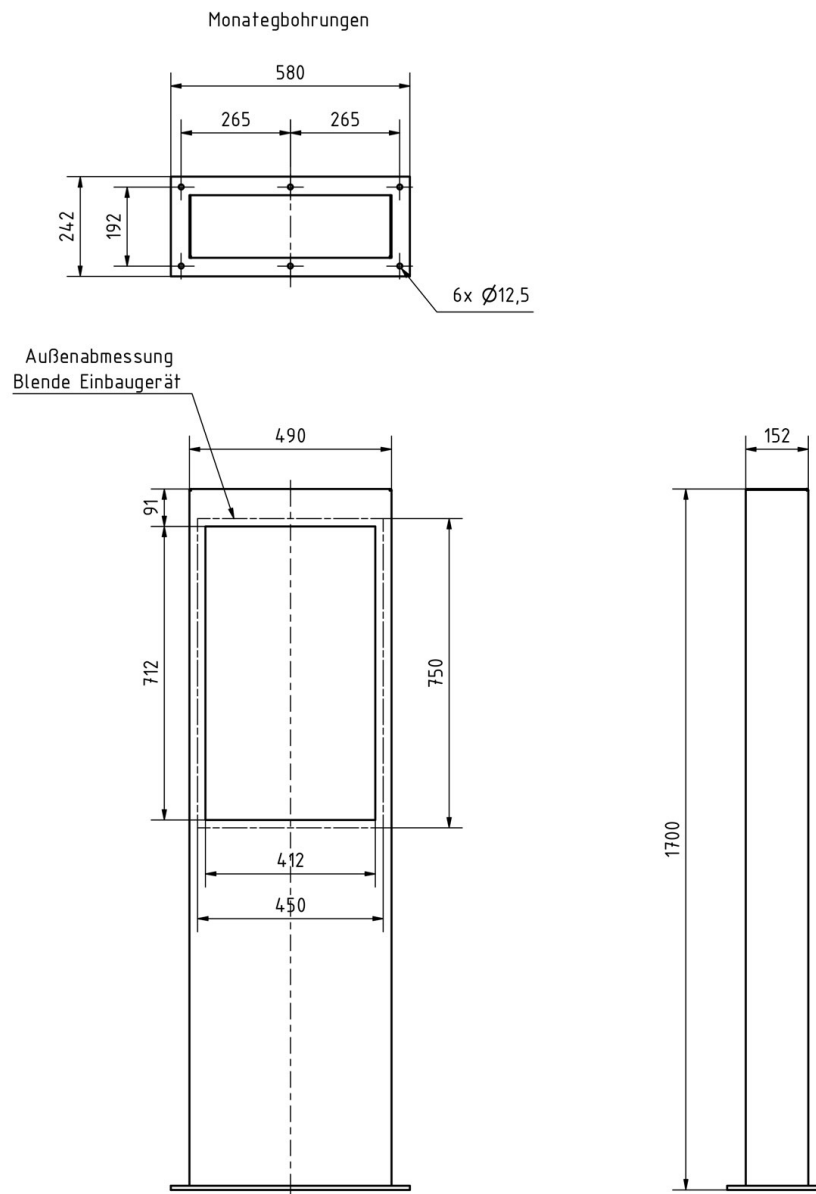

More images



