

# Stainless steel letter slot with DoorBird video intercom system - 350x63mm - 410x375mm slot | Stainless steel, ground

**Product number** 555-BEKA-35-KSDBE



## Product description

### Stainless steel letter slot with DoorBird video intercom - slot 350x63mm - 410x375mm

High-quality manufactured letterbox cover with letter slot from Briefkasten Manufaktur. Integrated DoorBird IP Video Door Station D2100E or D1100E. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your entrance door. The IP video door station can be operated as a stand-alone unit or integrated into an existing smart home platform. Existing, classic installations such as a door chime or an electric door and gate opener can also continue to be used with DoorBird and controlled via the app.

This is a real eye-catcher among letterboxes. Clean lines and no-frills design characterise the designer letterbox collection. Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur. The DoorBird was not only invented and developed in Germany, but is still produced in Berlin today. At DoorBird, "Made in Germany" is not just a seal, but a philosophy that is lived and breathed. The IP video door stations are manufactured in the DoorBird factory to guarantee the highest quality, durability and customer satisfaction.

- Stainless steel letter slot made of 2 mm stainless steel V2A 1.4301, polished.
- The insertion flap is produced at the letter box manufactory. German quality production "Made in Germany".
- Insertion size suitable for C4 landscape. Very large letters and magazines fit in here without creasing.
- Optionally with house number, backlit in white incl. EVN LED power supply unit / transformer IP65 12V/DC 0.1-4W for LED illumination of the house number.
- Incl. DoorBird IP video door station D2100E or D1100E installed.
- Fastened using four stainless steel screws incl. plugs supplied.

## Important information

### Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

### Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to penetrate the letterbox. It is therefore necessary to plan sufficiently dimensioned letterboxes for the upcoming requirements. In certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.


## Product properties

<b>Connection technology</b>	LAN
<b>Number of bell push buttons</b>	1 button
<b>Functions</b>	Camera, Intercom
<b>Mounting type</b>	Screw
<b>Boxes by volume</b>	Normal > 10 litres
<b>Material</b>	Stainless steel V2A 1.4301
<b>Name labelling</b>	Laser-engraved
<b>Number of boxes</b>	with 1 letterbox
<b>Surface/colour</b>	Brushed
<b>Removal of mail</b>	On the back

## Dimensions

<b>Width in mm</b>	410
<b>Height in mm</b>	375
<b>Height of letterbox slot in mm</b>	63,0
<b>Width of letter slot in mm</b>	350,0
<b>Weight in kg</b>	8
<b>Delivery condition</b>	Delivery is assembled

## Drawing

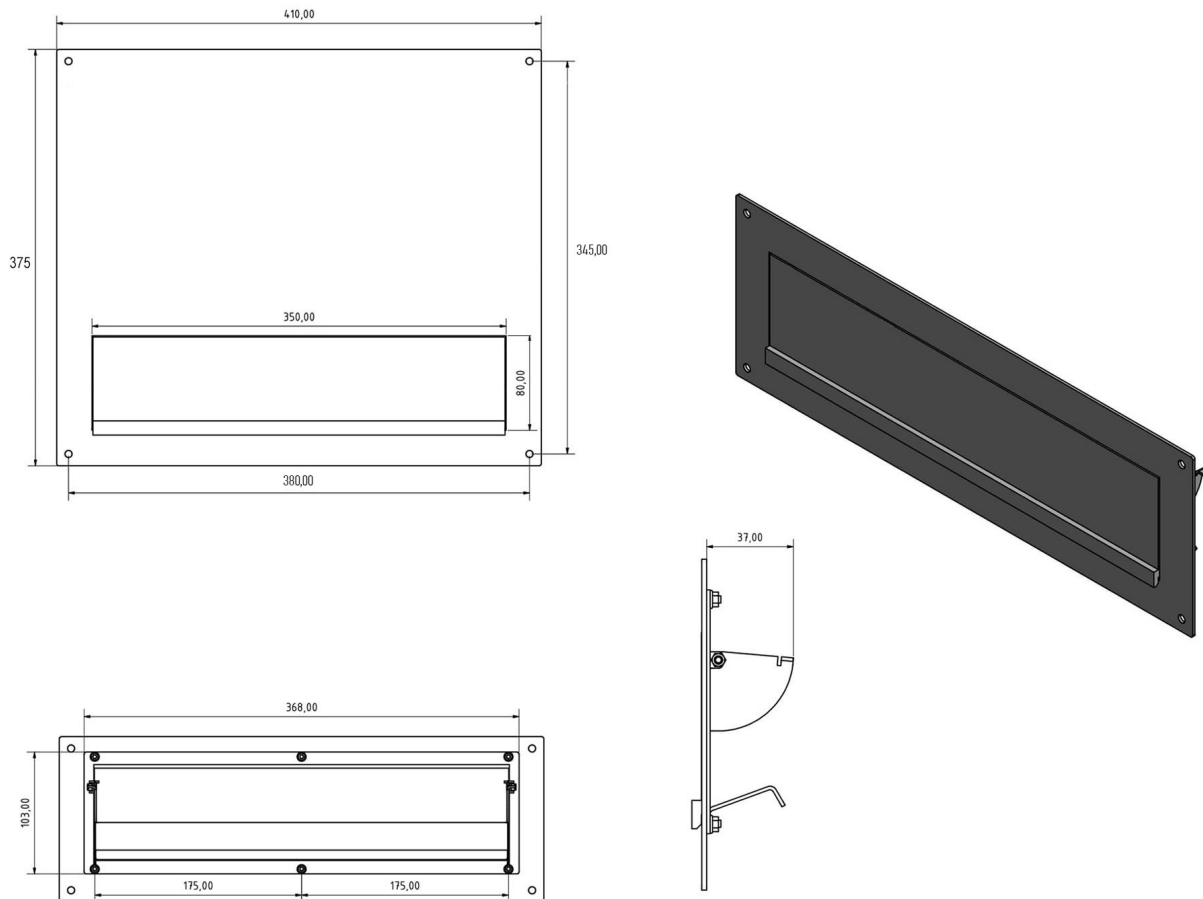

## More images

