

3-piece stainless steel surface-mounted letterbox design BASIC Plus 382XA AP with bell box - stainless steel V2A | 150mm depth | with 3 letterboxes (1x3) | Top | Stainless steel, ground

Product number 382XA-VA-3-SP-150-O



Product description

3-post stainless steel surface-mounted letterbox design BASIC Plus 382XA AP with bell box - stainless steel V2A

High-quality surface-mounted letterbox for 3 parties made in Germany by Briefkasten Manufaktur.


The letterbox is made entirely of V2A stainless steel, polished. The very high-quality workmanship and the well thought-out concept make this letter box our top seller. A rain drainage edge for optimum water protection, a continuous rubber lip for quiet insertion, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this surface-mounted letterbox.

The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

Thanks to the design, self-assembly is uncomplicated. The letterbox system is prepared for uncomplicated complete assembly, so there is no need for time-consuming wall mounting of individual boxes.

- **3-post surface-mounted letterbox made of weather-resistant stainless steel V2A 1.4301, 240 grain polished**
- The letterbox is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letter box complies with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flap with sound-absorbing rubber seal for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, changeable name plate under the flap and post holder for each letterbox.
- Large capacity thanks to optional letterbox depth +50 mm = approx. 17 litres. Suitable for companies and households with very high mail volumes.
- Incl. side panelling + rain cover made of stainless steel V2A 1.4301, 240 grain polished.
- **Bell box made of stainless steel V2A 1.4301, 240 grain polished**
- Intercom perforation with universal adapter. (Intercom system/ built-in loudspeaker not included in the scope of delivery). Also available without speech perforation.
- Universal adapter is suitable for all commercially available built-in loudspeakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism - The nameplate is indentation-proof and impact-resistant, the plastic is flame-retardant.
- For wall mounting incl. mounting rail and fixing material (screws + plugs).

Optional components

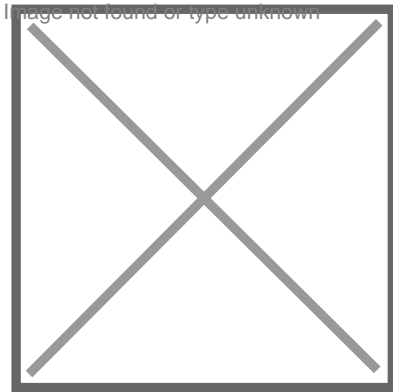

The COMELIT video intercom sets are completely pre-wired and programmed by us, so the set is ready for connection. Just plug in 2 wires!

COMELIT intercom sets are easily connected using 2-wire technology. This means that the existing wiring can be used and there are no additional costs for new wiring, plastering or painting work. Simply lay 2 wires from the new power supply unit in the meter cupboard to the built-in loudspeaker in the function box of the letterbox system and 2 wires from the power supply unit to the door station in the flat. DONE.

- ++ Ideal for remodelling and renovation, as existing doorbell cables are used
- ++ no additional work for plastering and painting
- ++ low costs due to simple installation
- ++ simple commissioning
- ++ Includes handicap function on the door
- ++ Can be extended at any time with handicap-compatible monitors for hearing aid users

Face recognition and voice commands

Integration with Amazon Alexa, available free of charge via Mini Wi-Fi, is the incredible innovation that led to the creation of the first voice-controlled video intercom. This can also be activated remotely. We already know that the phone can be unlocked at a glance. Why shouldn't it also be possible to open the gate to the house? Comelit is fully utilising the potential of the cloud and is the first company in Germany to offer the new face recognition function: an intuitive and very useful way to manage access to your home via the video intercom.

The functions

- Receive calls from the door station wherever you are.
- View the recordings from the cameras in your system (including the door station cameras).
- Retrieve video messages from visitors recorded during your absence.
- Call the internal devices in your system (internal audio and video intercoms).
- Open gates and doors and switch on the lights.
- The APP is based on PUSH notifications; this means considerable energy and data savings as the APP is only activated when a call is received, and much more.

Video intercom set

- **Door station 6741W with mobile function**
- Colour monitor with 4.3" 16/9 screen, full-duplex hands-free function and touch-sensitive buttons. Allows brightness and contrast control and adjustment of the audio signal strength and ringtone. Several melodies are available to personalise the ringtone. Equipped as standard with buttons for door opener, for activating/deactivating the speech connection with corresponding LED indicators. Door station with Wi-Fi interface to simulate presence at home: in combination with the COMELIT app, door calls can be answered from anywhere and doors and gates can be opened. Face recognition for contactless access is possible with the COMELIT app. Dimensions: 160 x 115 x 22 mm (WD).
- **Video loudspeaker 4681 with holder 1250U-Switch**
- Colour audio-video unit for 2-wire system, complete with front-adjustable, LED-illuminated colour camera. Equipped with terminal block, speech connection with echo cancellation, dustproof and waterproof loudspeaker, electret microphone and adjustable loudspeaker volume on the front. Additional visual and acoustic programmable handicap indicators. Integrated electronic door opener function (3 A) and additional relay contacts C, NC, NO with 10 A. Dimensions: 102 x 55 x 38 mm (WD)
- **2-wire power supply unit 1209**
- Power supply unit for 2-wire systems for supplying the external call station (terminals L1 - L1) and the riser line (terminals L2 - L2). Equipped with a terminal for line termination. Input voltage 110-240 V AC. Note: The power supply unit does not provide an interface for connecting external lighting such as for nameplates or similar. Dimensions: 106 x 89 x 62 mm (WD) (6 DIN modules)

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

The mail is only protected against moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water may still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

Product properties

| | |
|---|---|
| Series | BASIC |
| Number of bell push buttons | 1 button, 2 buttons, 3 buttons |
| Functions | Light button, Intercom |
| Functional box prepared for manufacturer | GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit |
| Name labelling | Nameplate |
| Material | Stainless steel V2A 1.4301 |
| Removal of mail | On the front |
| Surface/colour | Brushed |
| Boxes by volume | Large > 16 litres |
| Mounting type | Surface-mounted |
| Number of letterboxes | with 3 letterboxes |

Abmessungen

| | |
|---|--|
| Height of single box in mm: | 330,0 |
| Width of single box in mm: | 355,0 |
| Capacity in litres: | 12,0 17,0 |
| Height of letterbox slot in mm: | 35,0 |
| Width of letter slot in mm: | 325,0 |
| Height of letterbox in mm: | 1090,0 |
| Width of letterbox system in mm: | 355,0 |
| Depth in mm: | 100,0 150,0 |
| Weight in kg: | 24 |
| Shipping information: | Depending on the order volume, delivery will be by parcel post or bulky goods. Partial deliveries are possible for dismountable products (e.g. stand mailboxes can be shipped separately). |

More images

