

Design flush-mounted letterbox GOETHE UP lateral with newspaper compartment - DoorBird video intercom - RAL of your choice | Right | with newspaper compartment

Product number 215-UP-1-SPS-ZF-DB-R



Product description

Design flush-mounted letterbox GOETHE UP lateral with newspaper compartment - DoorBird video intercom - RAL of your choice

High-quality flush-mounted letterbox with a seamlessly integrated DoorBird IP Video Door Station D2100E or D1100E in flush-mounted design. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your entrance door. The IP video door station can be operated as a stand-alone unit or integrated into an existing smart home platform. Existing, classic installations such as a door chime or an electric door and gate opener can also continue to be used with DoorBird and controlled via the app.

The dimensions of the individual box allow for a capacity of approx. 16 litres, while the large slot guarantees no crumpled mail, even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The letterbox systems in the GOETHE collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- Flush-mounted letterbox made entirely of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. So the mail cannot fall towards you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (stainless magnetic stainless steel), powder-coated in RAL colour of your choice with stainless steel laser inscription "ZEITUNG" (font ARIAL, if name/house number, then same as your chosen font).
- Newspaper compartment can be opened from bottom to top.
- Functional box (BH 200x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optionally with house number, lasered or house number, backlit in white incl. EVN LED power supply unit / transformer IP65 12V/DC 0.1-4W for LED illumination of the house number.
- Optionally with name inscription, lasered or engraved (illuminated).
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Incl. DoorBird IP video door station D2100E or D1100E installed.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

| | |
|---|--|
| Surface/colour | RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white |
| Series | GOETHE |
| Connection technology | LAN |
| Number of bell push buttons | 1 button |
| Functions | Newspaper compartment, Camera, Intercom, Fingerprint, Keypad |
| Functional box prepared for manufacturer | DoorBird |
| Material | Aluminium AlMg3 W19, Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel) |
| House number | House number as laser engraving, House number as laser cut, illuminated |
| Name labelling | Laser-engraved , Illuminated laser-cut engraving |
| Removal of mail | On the front |
| Number of boxes | with 1 letterbox |
| Boxes by volume | Large > 16 litres |
| Mounting type | Flush-mounted |

Dimensions

| | |
|--|---|
| Height of single box in mm | BK 400.0 ZF 200.0 |
| Width of single box in mm | 400,0 |
| Capacity in litres | BK 16.0 ZF 8.0 |
| Height of letterbox slot in mm | 35,0 |
| Width of letter slot in mm | 360,0 |
| Height of letterbox in mm | External dimension 652.0 installation dimension 605.0 |
| Width of letterbox system in mm | External dimension 652.0 installation dimension 605.0 |
| Overall height in mm | recommended 1500.0 - 1700.0 |
| Total width in mm | 650,0 |
| Depth in mm | 100.0 installation dimension 103.5 |
| Weight in kg | 21 |
| Delivery condition | Delivery is assembled |

Drawing

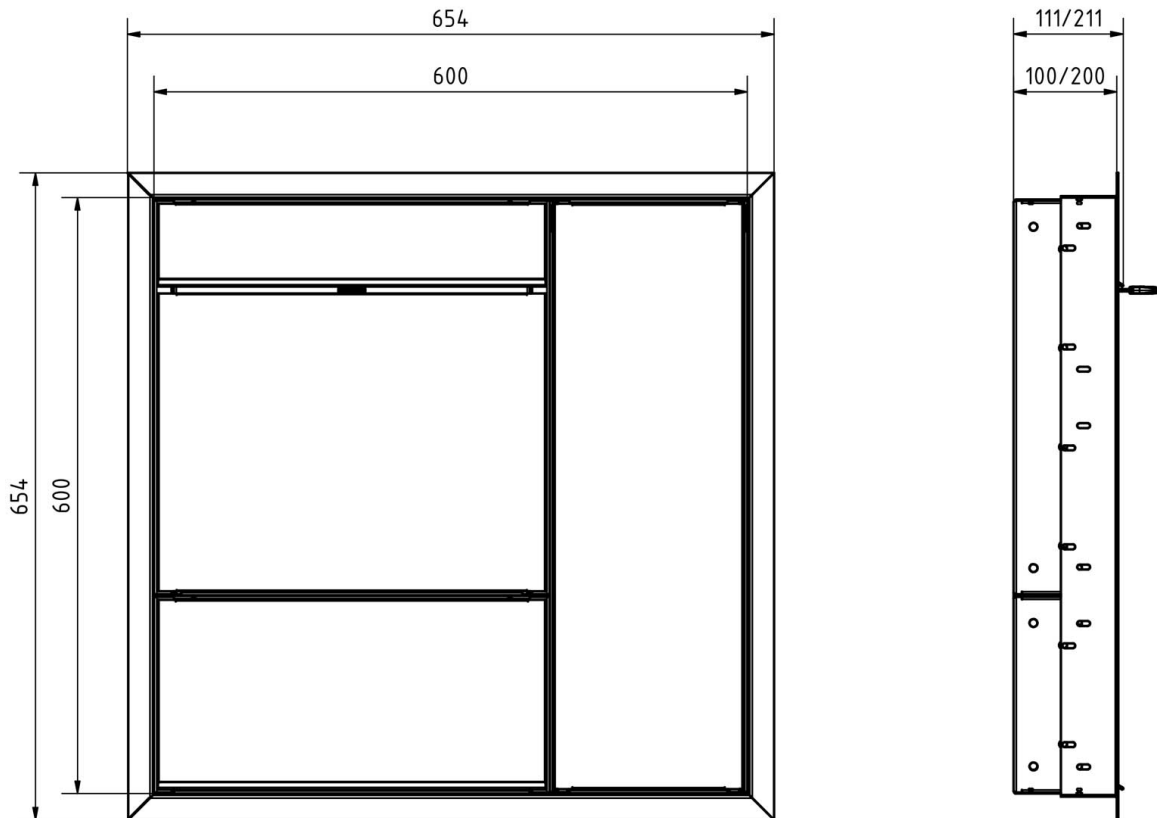

More images

