

# Design free-standing letterbox GOETHE LIB with bell box & newspaper compartment - LED design element - RAL of your choice

**Product number** 215-LIB-1-SP-ZF



## Product description

### Design free-standing letterbox GOETHE® LIB with bell box & newspaper compartment - LED design element - RAL of your choice

High-quality free-standing letterbox with newspaper compartment, bell box for intercom and elegant stainless steel rectangular tube stand incl. LED design element. The modern GOETHE® letterbox is ideal for the sophisticated entrance area. The linear design without a visible lock makes this letterbox look particularly elegant.

The dimensions of the individual box allow for a capacity of approx. 16 litres, while the large slot guarantees no crumpled mail, even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is concealed inside the letterbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this letterbox is designed in such a way that the removal door prevents the mail from falling towards you. The water drainage edge ensures that the mail inside is optimally protected from the weather. The insertion flap is fitted with high-quality axle dampers, guaranteeing quiet closing and preventing annoying rattling caused by the weather.

The letterbox systems in the GOETHE® collection are characterised by the consistent use of stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE® systems are available directly in our shop.

Thanks to the design, self-assembly is uncomplicated.

**Protected utility model according to DPMA file number DE: 20 2021 101 679.5**

- Free-standing letterbox with rectangular tube stand element and stainless steel letterbox.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Flat LED lighting unit as a design element. LED 3000 K 395x100 mm x 5 mm, IP65 2 metre supply cable 24 Volt, 10 Watt, Plexiglas edges satinised incl. LED power supply unit
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative push-key lock with 2 keys.
- Mail is inserted and removed from the front. Insertion flap with high-quality axle dampers for very quiet mail insertion.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 across, even large letters fit in here without creasing.
- Removal door opens from top to bottom. So the mail cannot fall towards you.
- Optional house number labelling approx. 70-80 mm high.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser labelling "ZEITUNG" (ARIAL font, if name/house number, then the same as your chosen font).
- Newspaper compartment can be opened from bottom to top.
- Functional box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Optional interchangeable stainless steel nameplate with laser inscription, Plexiglas nameplate or illuminated inscription.
- 8-12V DC short-stroke bell push with LED ring lighting (blue, white, red or green). The bell button lighting cannot be supplied via the control unit. It must be connected to an additional power supply.
- An 8-12V DC short-stroke light button with pictogram is available as an option.
- Preparation (built-in loudspeaker not included) for intercom system possible. Optionally with universal adapter for all commercially available built-in loudspeakers.
- Optimum rain protection thanks to rain run-off edges.
- The pedestal is made of 2 mm stainless steel rectangular tube, powder-coated in RAL colour with 6 mm base plate for screw mounting.

**Important information:****Camera or intercom preparation**

**We recommend that the electrical installation is always carried out by an electrician.**

We offer the preparation of cameras & intercoms from various manufacturers for our letterboxes. The preparation does not include any end devices, but only the provision of screw mounts, drill holes and perforations. So that you can mount your end device without any problems.

**Water protection**

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GOETHE
<b>Number of bell push buttons</b>	1 button
<b>Functions</b>	Newspaper compartment, Light button, Camera, Intercom, Fingerprint, Keypad
<b>Functional box prepared for manufacturer</b>	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, HHG, HIKVISION, PCS, Sesam, ekey
<b>Illuminants</b>	LED, 10 Watt
<b>Name labelling</b>	Laser-cut engraving, Nameplate, Laser-engraved , Illuminated laser-cut engraving
<b>Mounting type</b>	Free-standing
<b>Material</b>	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
<b>House number</b>	House number as laser engraving
<b>Removal of mail</b>	On the front
<b>Number of boxes</b>	with 1 letterbox
<b>Boxes by volume</b>	Large > 16 litres

## Dimensions

<b>Height of single box in mm</b>	400,0
<b>Width of single box in mm</b>	400,0
<b>Capacity in litres</b>	16
<b>Height of letterbox slot in mm</b>	35,0
<b>Width of letter slot in mm</b>	360,0
<b>Height of letterbox in mm</b>	800,0
<b>Width of letterbox system in mm</b>	400,0
<b>Overall height in mm</b>	1300,0
<b>Total width in mm</b>	440,0
<b>Depth in mm</b>	100,0
<b>Weight in kg</b>	26
<b>Delivery condition</b>	Delivery is assembled

## Drawing

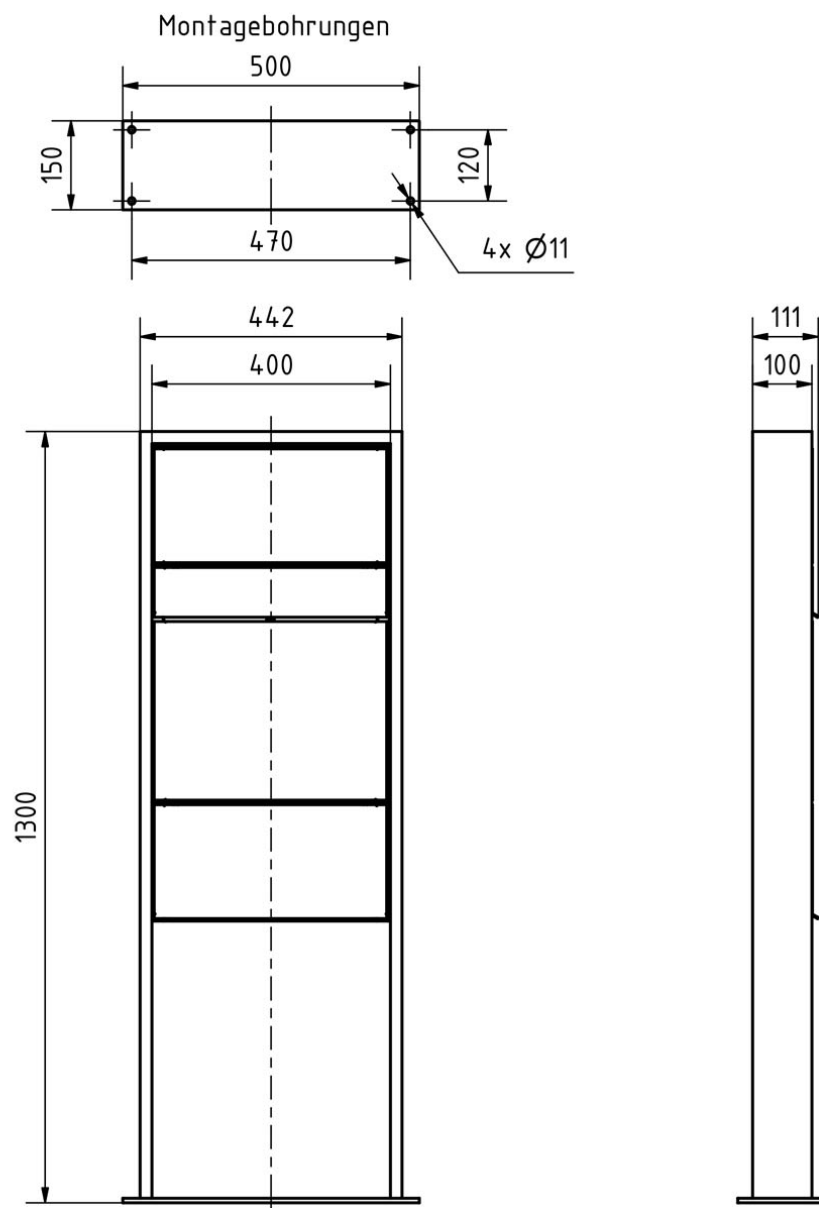

## More images



