

Design letterbox pedestal GRIMM - Colour of your choice - LOXONE Intercom/Code Touch 1x1 prepared | ? Colour of your choice | 1x1 LOXONE intercom prepared | mail collection at the front

Product number 562-STL-SPO-1-SF-LOX1



Product description

Design letterbox pedestal GRIMM - A masterpiece of letterbox manufacturing

The GRIMM letterbox column combines modern design with first-class workmanship - ideal for discerning clients and architects who are looking for an elegant solution for integrating LOXONE Intercom. Manufactured from high-quality stainless steel and completely "Made in Germany" by the letterbox manufacturer Lippe, this model stands for durability, functionality and a stylish look. The powder-coated front panel made of 2 mm stainless steel V2A 1.4301 impresses with its timeless appearance and high corrosion resistance. The flush-mounted design enables seamless integration of up to two LOXONE system modules (not included) via a sophisticated mounting system. Preparation is provided for 1 LOXONE Intercom (incl. perforation for sound outlet).

The GRIMM letterbox is not only a visual highlight, but also at the forefront in terms of functionality and quality. Thanks to the innovative push-key lock, the letterbox can be operated easily and conveniently with one hand. Open the door with one push and close the door without using a key. The lock is optimally protected from the weather. The letterbox also features an intelligent removal system: the door opens from top to bottom, ensuring that the mail remains securely in the box and cannot fall towards you. Mail is also conveniently inserted from the front, with high-quality axle dampers ensuring that the flap closes gently. The GRIMM is particularly unique thanks to its double box system: the flush-mounted box can be installed during the shell construction phase, while the front panel is only fitted once the construction work has been completed - for maximum flexibility in the future and protection from dirt and dust during the construction phase. The plaster box is made of stainless steel and has pre-punched cable inlets on all sides to allow easy electrical installation.

Thanks to the DIN/EN 13724 standard, the GRIMM is ideal for large letters in C4 format, which can be inserted without creasing. The GRIMM letterbox impresses with its durable quality, timeless design and sophisticated functionality.

A special feature of the GRIMM designer letterbox pedestal is the fully welded pedestal made of solid V2A stainless steel, powder-coated in the colour of your choice. This design guarantees maximum stability and an exceptionally long service life - even with long-term outdoor use. The fully welded construction creates a seamless, robust body with no visible screw or plug connections, which not only emphasises the elegant appearance, but also prevents moisture and dirt from penetrating. The precisely sanded seams ensure a homogeneous appearance and give the steel a particularly high-quality look. The design also enables invisible cable routing within the pillar so that all electrical connections for the DoorBird video intercom system and other smart home components can be installed safely and securely. This unique production method sets new standards in terms of design and functionality and makes the GRIMM letterbox pedestal a future-proof solution for modern architectural projects.

- High-quality letterbox pillar made entirely of stainless steel for free-standing installation.
- Front panel made of 2 mm stainless steel V2A 1.4301, powder-coated in the colour of your choice.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- The LOXONE Intercom can be inserted seamlessly into the flush-mounted design and replaced at any time. The preparation is intended for 1 LOXONE Intercom (incl. perforation for sound outlet). WITHOUT LOXONE Intercom/system components!
- Innovative push-key lock including 2 keys with key number, convenient locking without key, optimally protected from the weather.
- The removal door with opening limiter opens from top to bottom to prevent mail from falling towards you.
- Front mail slot with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724-compliant letterbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape - even large letters remain intact. Additional stainless steel removal protection integrated.
- Optimum weather protection thanks to offset cover.
- Double box system: The front panel can be easily installed after completion of the construction work and replaced at any time.
- The fully welded pedestal is made of 2 mm stainless steel V2A 1.4301, powder-coated in the colour of your choice. Construction height is 1.70 m.
- Invisible cable feed through the body is possible.
- The pedestal is fitted with a VA base plate. This is 10 mm thick and is finished with a cover plate. This conceals the fixing plugs.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GRIMM
Functions	Camera, Intercom
Functional box prepared for manufacturer	LOXONE
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres

Dimensions

Height of single box in mm	External dimension 750.0 installation dimension 710.0
Width of single box in mm	External dimension 450.0 installation dimension 410.0
Capacity in litres	26,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	External dimension 750.0 installation dimension 710.0
Width of letterbox system in mm	External dimension 450.0 installation dimension 410.0
Overall height in mm	1700,0
Total width in mm	Body 490.0 Base plate 580.0
Depth in mm	Korpuss 150.0 Base plate 242.0
Weight in kg	65
Delivery condition	Delivery is assembled

Drawing

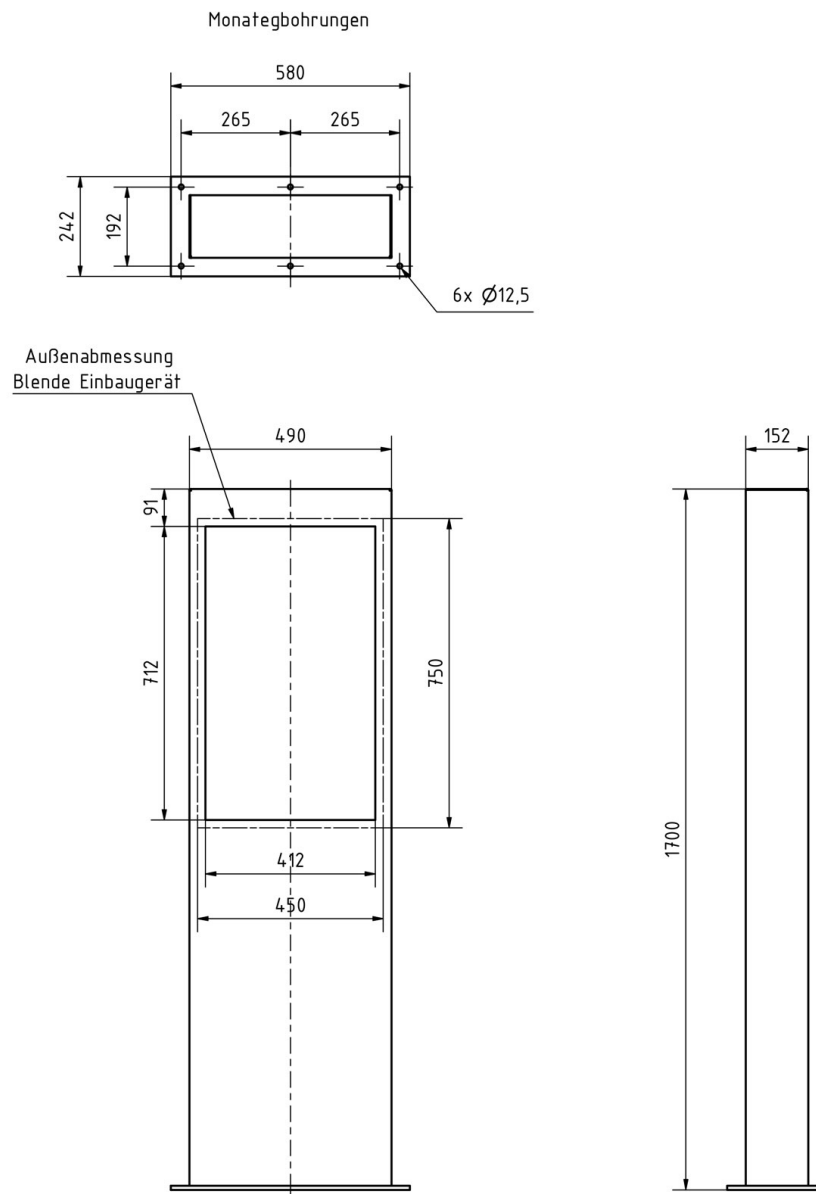

More images



