

Design letterbox pedestal GRIMM - polished stainless steel - LOXONE Intercom/Code Touch 2x1 prepared | (LOX2) | acier inoxydable, poli

Numéro de référence 562-STL-SPO-1-VA-LOX2



Description du produit

Design letterbox pedestal GRIMM - A masterpiece of letterbox manufacturing

The GRIMM letterbox column combines modern design with first-class workmanship - ideal for discerning clients and architects who are looking for an elegant solution for integrating LOXONE Intercom. Manufactured from high-quality stainless steel and completely "Made in Germany" by the letterbox manufacturer Lippe, this model stands for durability, functionality and a stylish look. The polished front panel made of 2 mm stainless steel V2A 1.4301 impresses with its timeless appearance and high corrosion resistance. The flush-mounted design enables seamless integration of up to two LOXONE system modules (not included) via a sophisticated mounting system. The preparation is intended for 1 piece LOXONE Intercom (incl. perforation for sound outlet) + 1 piece LOXONE NFC Code Touch/Touch Pure.

The GRIMM letterbox is not only a visual highlight, but also at the forefront in terms of functionality and quality. Thanks to the innovative push-key lock, the letterbox can be operated easily and conveniently with one hand. Open the door with one push and close the door without using a key. The lock is optimally protected from the weather. The letterbox also features an intelligent removal system: the door opens from top to bottom, ensuring that the mail remains securely in the box and cannot fall towards you. Mail is also conveniently inserted from the front, with high-quality axle dampers ensuring that the flap closes gently. The GRIMM is particularly unique thanks to its double box system: the flush-mounted box can be installed during the shell construction phase, while the front panel is only fitted once the construction work has been completed - for maximum flexibility in the future and protection from dirt and dust during the construction phase. The plaster box is made of stainless steel and has pre-punched cable inlets on all sides to allow easy electrical installation.

Thanks to the DIN/EN 13724 standard, the GRIMM is ideal for large letters in C4 format, which can be inserted without creasing. The GRIMM letterbox impresses with its durable quality, timeless design and sophisticated functionality.

A special feature of the GRIMM designer letterbox pedestal is the fully welded pedestal made of solid V2A stainless steel. This design guarantees maximum stability and an exceptionally long service life - even with long-term outdoor use. The fully welded construction creates a seamless, robust body with no visible screw or plug connections, which not only emphasises the elegant appearance, but also prevents the ingress of moisture and dirt. The precisely sanded seams ensure a homogeneous appearance and give the steel a particularly high-quality look. The design also enables invisible cable routing within the pillar so that all electrical connections for the DoorBird video intercom system and other smart home components can be installed safely and securely. This unique production method sets new standards in terms of design and functionality and makes the GRIMM letterbox pedestal a future-proof solution for modern architectural projects.

- High-quality letterbox pillar made entirely of stainless steel for free-standing installation.
- Front panel made of 2 mm stainless steel V2A 1.4301, polished.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- The LOXONE Intercom can be seamlessly integrated into the flush-mounted design and replaced at any time. The preparation is intended for 1 piece LOXONE Intercom (incl. perforation for sound outlet) + 1 piece LOXONE NFC Code Touch/Touch Pure. WITHOUT LOXONE Intercom/system components!
- Innovative push-key lock including 2 keys with key number, convenient locking without key, optimally protected from the weather.
- The removal door with opening limiter opens from top to bottom to prevent mail from falling towards you.
- Front mail slot with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724-compliant letterbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape - even large letters remain intact. Additional stainless steel removal protection integrated.
- Optimum weather protection thanks to offset cover.
- Double box system: The front panel can be easily installed after completion of the construction work and replaced at any time.
- The fully welded pedestal is made of 2 mm V2A stainless steel, polished. Construction height is 1.70 m.
- Invisible cable feed through the body is possible.
- The pedestal is fitted with a VA base plate. This is 10 mm thick and is finished with a cover plate. This conceals the fixing plugs.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Caractéristiques du produit

Série	GRIMM
Fonctions	Caméra, Poste d'interphonie
Boîte de fonctions préparée pour le fabricant	LOXONE
Type de montage	Autonome
Matériau de base	Acier inoxydable V2A 1.4301, Acier inoxydable 1.4016 (acier inoxydable magnétique)
Numéro de maison	Numéro de maison en gravure laser
Inscription du nom	Inscription du nom en gravure laser
Prélèvement de poste	Face avant
Nombre de boîtes aux lettres	avec 1 boîte aux lettres
Surface/couleur	Meulé
Caisses individuelles par volume	Grand > 16 litres

Dimensions

Hauteur du caisson individuel en mm	External dimension 750.0 installation dimension 710.0
Largeur du caisson individuel en mm	External dimension 450.0 installation dimension 410.0
Volume en litres	26,0
Hauteur de la fente d'introduction du courrier en mm	35,0
Largeur de la fente d'introduction du courrier en mm	325,0
Hauteur de la boîte aux lettres en mm	External dimension 750.0 installation dimension 710.0
Largeur de la boîte aux lettres en mm	External dimension 450.0 installation dimension 410.0
Largeur totale en mm	Body 490.0 Base plate 580.0
Profondeur en mm	Korpuss 150.0 Base plate 242.0
Poids en kg	65
État de livraison	Delivery is assembled

Esquisse

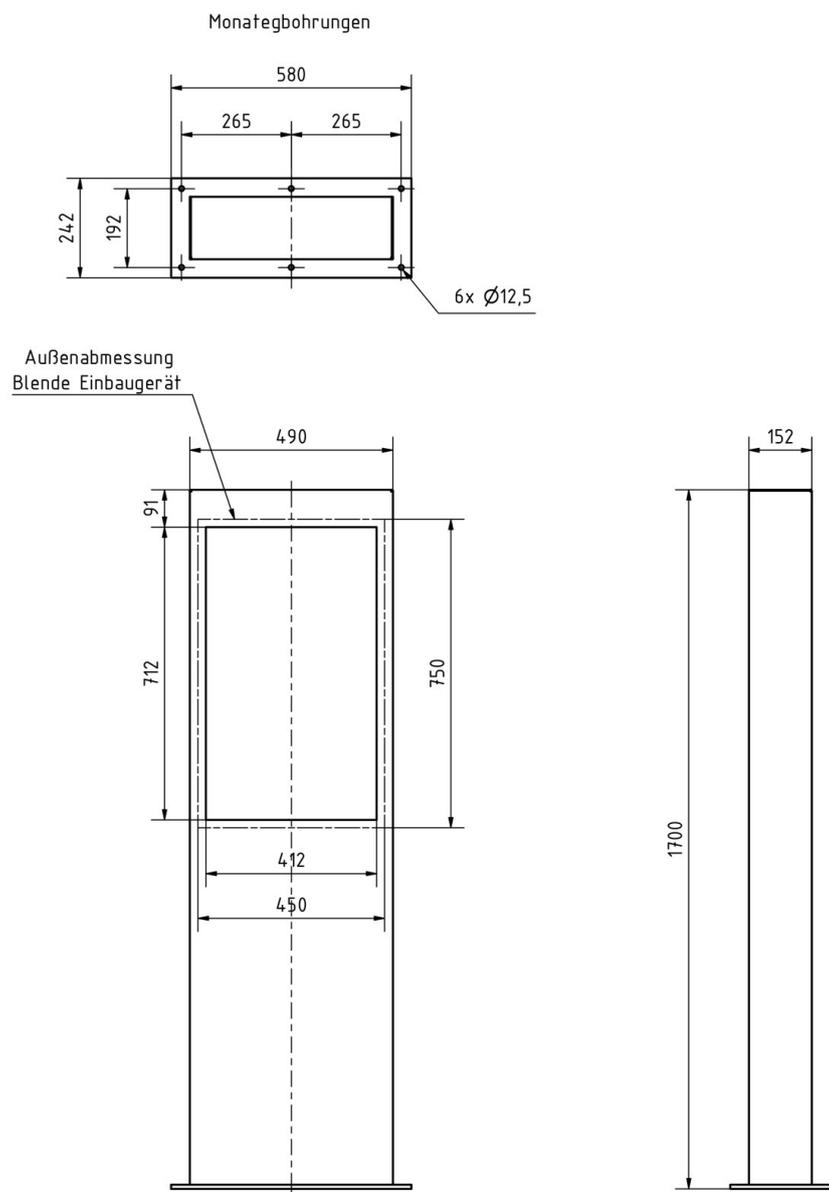

Plus d'images



