


6-piece stainless steel fence letterbox BASIC Plus 382XZ with bell box - RAL of your choice - removal from the rear | ? Colore a scelta | In alto | con 6 cassette per le lettere (2x3)

Codice articolo 382XAZ-6S-SP-O

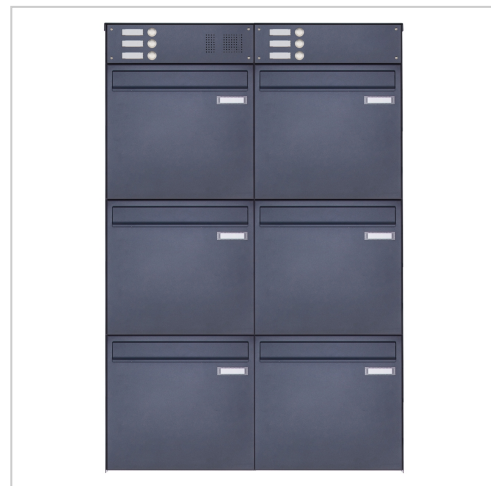

Descrizione del prodotto

6-piece stainless steel fence letter box BASIC Plus 382XZ with bell box for bell intercom system - RAL of your choice - removal from the rear

High-quality fence mailbox for 6 parties with bell box for intercom (optional camera) from Briefkasten Manufaktur. Mail is inserted from the front, residents can remove the mail from the back. The letterbox can be attached to your fence using the optional bar mat fastening; if this is not selected, the letterbox should be fitted and perforated on site by your fence builder. The complete fence letterbox is made of weather-resistant stainless steel V2A 1.4301, powder-coated in a RAL colour of your choice. A rain drainage edge for optimum water protection, a throw-in flap with rubber buffer, the solid interchangeable nameplate, a practical post holder and the very robust lock characterise this stainless steel letterbox.

The letterbox systems in the BASIC Plus collection are characterised by the consistent use of V2A stainless steel. The result is a very long service life and sustainability. The design has been developed by our own engineers with a view to high flexibility and modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- **6-post fence mailbox made of stainless steel V2A 1.4301, powder-coated in RAL colour**
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The letterboxes comply with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 landscape, large letters also fit in here without creasing.
- Insertion flaps with sound-absorbing rubber seal for very quiet mail insertion.
- The doors can be opened from left to right.
- Incl. 2 keys with key number, interchangeable nameplate (type 2) under the flap and post holder for each party.
- Incl. side cladding + rain cover made of V2A stainless steel, powder-coated in RAL colour.
- **Intercom bell part made of V2A stainless steel, powder-coated in RAL colour**
- Intercom hole with universal adapter. (Intercom system/ built-in loudspeaker not included in scope of delivery). Also available without speech perforation.
- Universal adapter is suitable for all commercially available built-in loudspeakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism - The nameplate is indentation-proof and impact-resistant, the plastic is flame-retardant.
- Suitable for fence mounting, fixing holes must be provided by the customer. Optionally with bar mat holder.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Water protection

The mail is only protected against moisture and dirt when it is fully inserted and the flap is closed. Under certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.

Caratteristiche del prodotto

Superficie/colore	RAL 9005 nero profondo, RAL 3004 rosso porpora, DB 703 minerale di ferro micaceo, RAL 7016 grigio antracite, RAL a scelta (secondo la tabella colori), Alluminio grigio RAL 9007, RAL 9016 bianco traffico
Serie	BASE
Scatola delle funzioni preparata per il produttore	GIRA, Busch Jaeger, Siedle, Elettronica STR, ELCOM, TCS, Ritto, Telegärtner, Auerswald, Legrand Bticino, Comelite
Numero di scatole	con 6 cassette per le lettere
Scatola singola a volume	Normale > 10 litri
Etichettatura dei nomi	Etichetta con il nome
Materiale di base	Acciaio inox V2A 1.4301
Numero civico	Numero civico come incisione laser
Tipo di montaggio	Recinzione
Ritiro dell'articolo	Lato posteriore

Dimensioni

Altezza della singola scatola in mm	330,0
Larghezza della singola scatola in mm	355,0
Volume in litri	12
Altezza della fessura per le lettere in mm	35,0
Larghezza della fessura per le lettere in mm	325,0
Altezza del sistema di cassette per le lettere in mm	1090,0
Larghezza del sistema di cassette per le lettere in mm	710,0
Profondità in mm	100.0 + 24.0 Rain roof
Peso in kg	26
Condizioni di consegna	System is delivered pre-assembled/partially disassembled

Altre immagini

