

# 5 doorbell pedestal designer - stainless steel V2A powder-coated with DoorBird D2100E video intercom system | 5 | 160 cm | DoorBird | ? Colour of your choice

Product number 870-VAR-KSDB2100E-5-160



## Product description

### 5-bell pedestal designer - stainless steel V2A powder-coated with DoorBird D2100E video intercom system

High-quality doorbell pillar for 5 parties made entirely of V2A stainless steel, powder-coated by Briefkasten Manufaktur. Integrated DoorBird IP Video Door Station D2100E. The DoorBird IP Video Door Station D2100E is the smart solution for your entrance door. The IP video door station can be operated as a stand-alone unit or integrated into an existing smart home platform. Existing, classic installations such as a door chime or an electric door and gate opener can also continue to be used with DoorBird and controlled via the app.

Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur. The DoorBird was not only invented and developed in Germany, but is also still produced in Berlin today. At DoorBird, "Made in Germany" is not just a seal, but a philosophy that is lived and breathed. The IP video door stations are manufactured in the DoorBird factory to guarantee the highest quality, durability and customer satisfaction.

- Doorbell pillar made of 1.5 mm stainless steel V2A 1.4301, powder-coated.
- The system is manufactured by Briefkasten Manufaktur. German quality production "Made in Germany".
- The speech part is made of 2 mm stainless steel V2A 1.4301, powder-coated. Dimensions: W 190 mm x H 640 mm x D 110 mm.
- House number approx. 70 mm high (max. 3 digits) with energy-saving LED lighting 12V DC approx. 50mA / 1W, white.
- Incl. 6x screw cover caps made of stainless steel V2A, polished so that the screws for fixing the front plate are not visible. See pictures.
- The fully welded pedestal is made of 1.5mm stainless steel V2A 1.4301, powder-coated. Construction height is either 1.30 m or 1.60 m.
- The pedestal is fitted with a VA base plate. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body possible.
- Incl. DoorBird IP video door station D2100E installed.

## Important information

### Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

### Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to penetrate the letterbox. It is therefore necessary to plan sufficiently dimensioned letterboxes for the upcoming requirements. Under certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GRIMM
<b>Connection technology</b>	LAN
<b>Number of bell push buttons</b>	5 buttons
<b>Functions</b>	Camera, Intercom, Fingerprint, Keypad
<b>Functional box prepared for manufacturer</b>	DoorBird
<b>Mounting type</b>	Free-standing
<b>Material</b>	Stainless steel V2A 1.4301
<b>House number</b>	House number as laser engraving, House number as laser cut, illuminated

## Dimensions

<b>Height of single box in mm</b>	640,0
<b>Width of single box in mm</b>	190,0
<b>Overall height in mm</b>	1300,0   1600,0
<b>Total width in mm</b>	220.0 (foot plate 320.0)
<b>Depth in mm</b>	110.0 (foot plate 210.0)
<b>Weight in kg</b>	40
<b>Delivery condition</b>	Delivery is assembled

Drawing

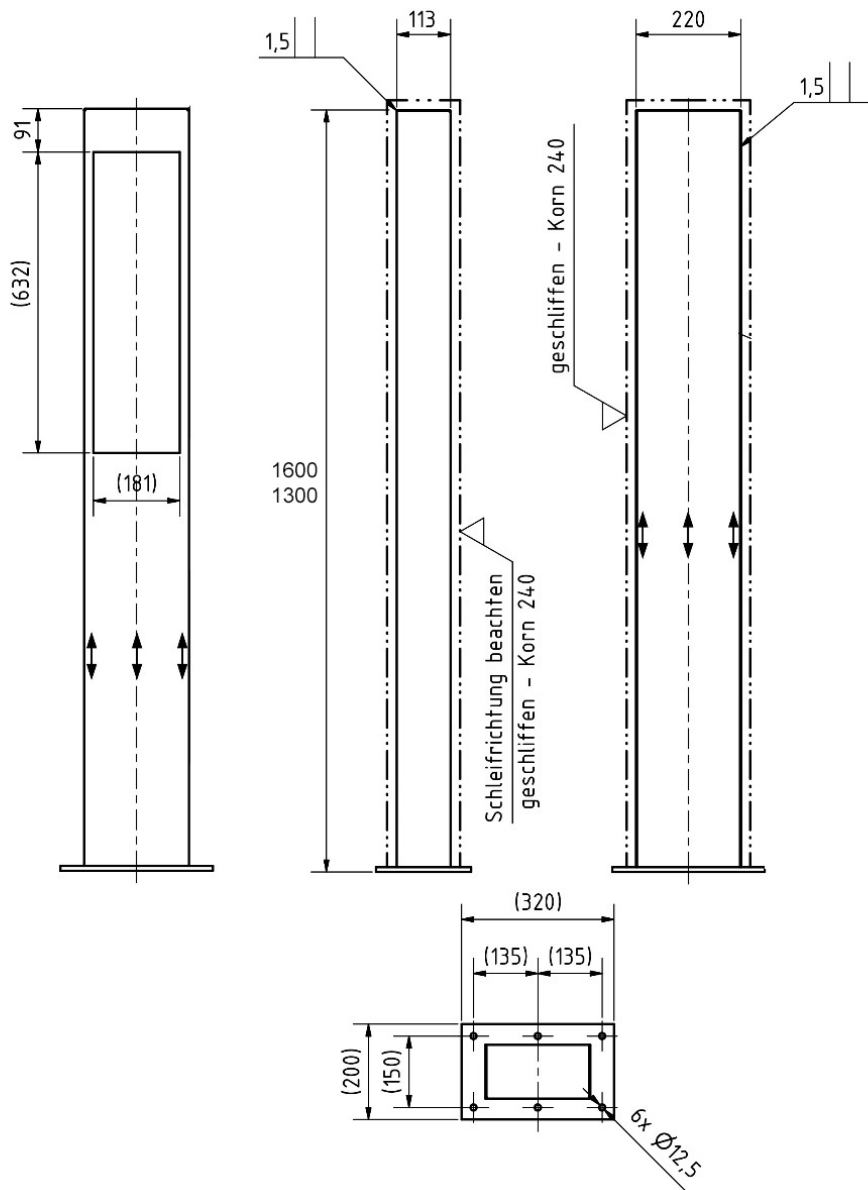

## More images

