

# Doorbell pedestal Designer - Stainless steel V2A - RAL of your choice - Comelit VIDEO complete set Wifi | 1 | Comelit Switch | 160 cm | ? Colour of your choice

**Product number** 870-VAR-KSCSWIFI-1-160



## Product description

### Bell pillar Designer - stainless steel V2A - RAL of your choice - Comelit VIDEO complete set

High-quality doorbell pillar made entirely of V2A stainless steel, powder-coated by Briefkasten Manufaktur. The Comelit video intercom system is an innovative solution with functions such as face recognition, voice commands and operation via smartphone app. Completely pre-programmed for easy installation - connect 2 wires and DONE! Optionally with gateway without home station or with WiFi home station.

Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Doorbell pillar made of 1.5 mm stainless steel V2A 1.4301, powder-coated.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- **EU compliant: COMELIT as a guarantee for your data** - the cloud server infrastructure belongs to COMELIT and is located in Europe (in Frankfurt, one of the most important financial centres in Europe and a major location for the data centre industry) and is managed in partnership with the world's most important cloud provider: Amazon AWS (Amazon Web Services).
- The speech part is made of 2mm stainless steel V2A 1.4301, powder-coated. Dimensions: W 190 mm x H 640 mm x D 110 mm.
- 8-12V DC short-stroke bell push-button with LED ring illumination in white.
- Optionally with name lettering approx. 10-20 mm high.
- Optionally with house number approx. 70mm high (max. 3 digits) optionally with energy-saving LED lighting 12V DC approx. 50mA / 1W, white or as laser engraving.
- Incl. 6x screw cover caps made of stainless steel V2A, polished so that the screws for fixing the front plate are not visible. See pictures.
- The fully welded pedestal is made of 1.5 mm V2A stainless steel, powder-coated. Construction height is either 1.30 m or 1.60 m.
- The pedestal is fitted with a VA base plate. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body is possible.

## Important information

### Camera or intercom preparation

**The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.**

### Water protection

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to penetrate the letterbox. It is therefore necessary to plan sufficiently dimensioned letterboxes for the upcoming requirements. Under certain extreme weather conditions, water can still enter (up to 1ccm according to DIN EN 13724). This is not a reason for complaint.


## Product properties

<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Series</b>	GRIMM
<b>Connection technology</b>	2-wire
<b>Number of bell push buttons</b>	1 button
<b>Functions</b>	Camera, Intercom, Fingerprint, Keypad
<b>Functional box prepared for manufacturer</b>	Comelit
<b>Mounting type</b>	Free-standing
<b>Material</b>	Stainless steel V2A 1.4301
<b>House number</b>	House number as laser engraving, House number as laser cut, illuminated
<b>Name labelling</b>	Laser-engraved

## Dimensions

<b>Height of single box in mm</b>	640,0
<b>Width of single box in mm</b>	190,0
<b>Overall height in mm</b>	1300,0   1600,0
<b>Total width in mm</b>	220.0 (foot plate 320.0)
<b>Depth in mm</b>	110.0 (foot plate 210.0)
<b>Weight in kg</b>	40
<b>Delivery condition</b>	Delivery is assembled

## Drawing

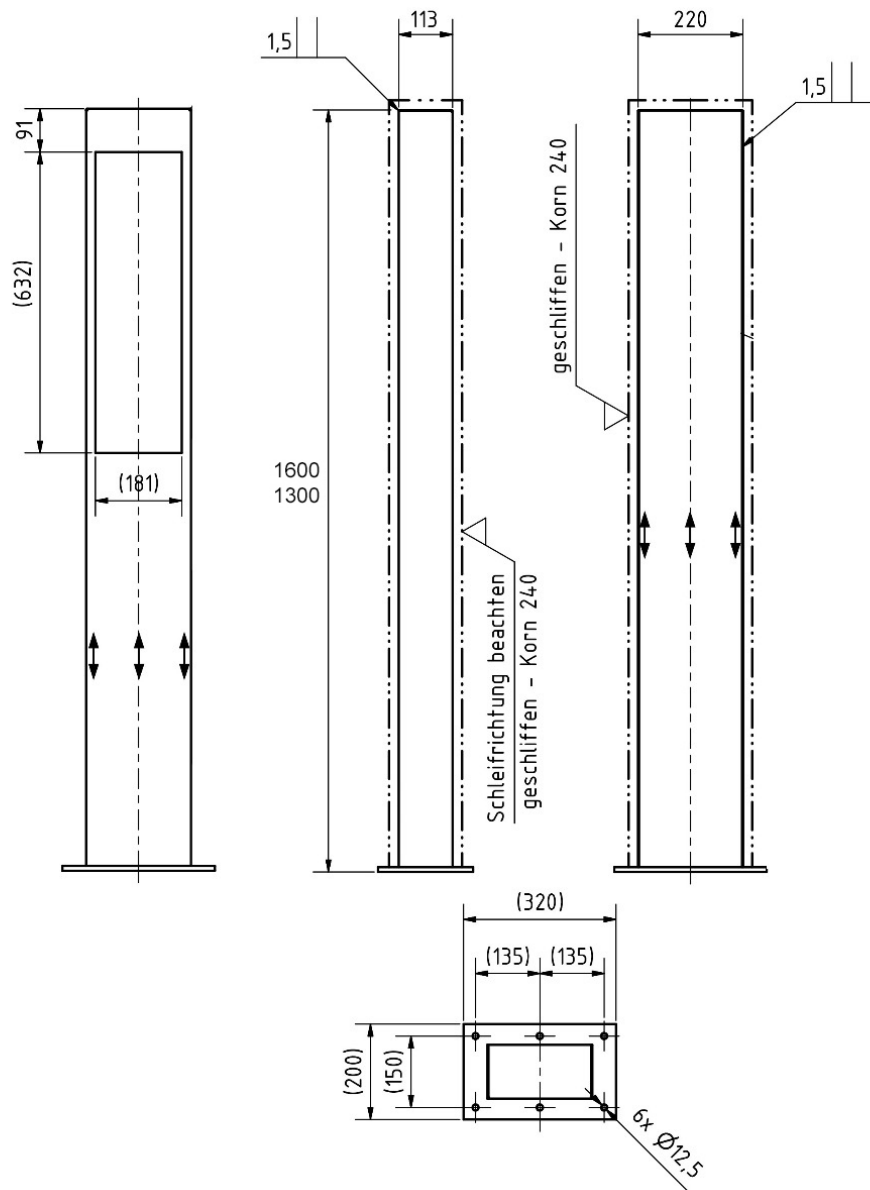

More images

