

Design letterbox pedestal GRIMM - rear removal - polished stainless steel with COMELIT Ultra - VIDEO set | Comelit Ultra | mail collection at the back | Stainless steel, ground

Product number 562-STL-PE-H-SPO-1-VA-CSU



Product description

GRIMM designer letterbox pedestal with Comelit video door intercom - modern technology meets timeless design

The GRIMM letterbox pillar with rear removal combines modern design, precise workmanship and high-quality materials - ideal for builders, architects and homeowners looking for a free-standing, elegant and durable solution with an integrated Comelit video door intercom. Made from robust stainless steel and completely "Made in Germany" by the letterbox manufacturer Lippe, this pillar stands for quality, functionality and timeless design. The polished front panel made of 2 mm V2A stainless steel impresses with its high corrosion resistance and clear lines that blend harmoniously into any modern architecture.

The Comelit Ultra video door intercom takes centre stage, with a choice of 2-wire technology or ViP (IP technology). Both systems enable convenient, secure and networked door communication. Visitors can be seen and spoken to at any time via the Comelit app and doors or gates can be opened if required - whether at home or on the move. The GRIMM letterbox column thus combines modern technology with maximum ease of use.

The GRIMM letterbox impresses with its modern design, high-quality workmanship and sophisticated functionality. Equipped with a classic stainless steel lever lock including dust protection cap, the locking mechanism is reliably protected from the weather and guarantees a long service life. Mail can be conveniently removed from the rear - ideal if the letterbox is integrated into a wall or fence. Mail is inserted from the front and is supported by high-quality axle dampers, which enable the flap to close gently and quietly. Thanks to the practical design, your mail remains securely in the box even when the flap is opened. The GRIMM is particularly flexible thanks to its double box system: the pillar can be installed during the shell construction phase, while the front panel is only fitted once the construction work has been completed. This protects the letterbox from dirt and damage during the construction phase and ensures that it looks perfect when you move in.

The GRIMM letterbox column fulfils the requirements of DIN/EN 13724 and is therefore suitable for letters in C4 format - without creasing or damage. Quality, durability and precision are just as important here as a clear, modern look.

A special feature of the GRIMM designer letterbox pedestal is the fully welded pedestal made of solid V2A stainless steel, powder-coated in the colour of your choice. This design guarantees maximum stability and an exceptionally long service life - even with long-term outdoor use. The fully welded construction creates a seamless, robust body with no visible screw or plug connections, which not only emphasises the elegant appearance, but also prevents moisture and dirt from penetrating. The precisely sanded seams ensure a homogeneous appearance and give the steel a particularly high-quality look. The design also enables invisible cable routing within the pillar, so that all electrical connections for the COMELIT Ultra video intercom system and other smart home components can be installed safely and securely. This unique production method sets new standards in terms of design and functionality and makes the GRIMM letterbox pedestal a future-proof solution for modern architectural projects.

- High-quality letterbox pillar made entirely of V2A stainless steel for free-standing installation.
- Front panel made of 2 mm stainless steel V2A 1.4301, polished.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Integrated Comelit Ultra in two modern connection variants - 2-wire technology and ViP (IP technology). Both systems impress with their high flexibility, simple installation and future-proof network integration.
- High-quality lever lock including 2 keys with key number.
- The rear removal door with opening limiter opens from top to bottom to prevent mail from falling towards you.
- Front insertion with high-quality axle dampers for very quiet mail insertion.
- DIN/EN 13724-compliant letterbox, insertion size (3.5 cm x 32.5 cm) for C4 landscape - even large letters remain intact. Additional stainless steel removal protection integrated.
- Optimum weather protection thanks to offset cover.
- Double box system: The cover can be easily installed after completion of the construction work and replaced at any time.
- The fully welded pedestal is made of 2 mm V2A stainless steel, polished. Construction height is 1.70 m.
- Invisible cable feed through the body is possible.
- The pedestal is fitted with a VA base plate. This is 10 mm thick and is finished with a cover plate. This conceals the fixing plugs.

Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible.

The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.


Product properties

Series	GRIMM
Connection technology	2-wire, LAN
Number of bell push buttons	1 button
Functions	Camera, Intercom, Fingerprint, Keypad
Functional box prepared for manufacturer	Comelit
Mounting type	Free-standing
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Number of boxes	with 1 letterbox
Surface/colour	Brushed
Boxes by volume	Large > 16 litres
Removal of mail	On the back

Dimensions

Height of single box in mm	External dimension 750.0 installation dimension 710.0
Width of single box in mm	External dimension 450.0 installation dimension 410.0
Capacity in litres	26,0
Height of letterbox slot in mm	35,0
Width of letter slot in mm	325,0
Height of letterbox in mm	External dimension 750.0 installation dimension 710.0
Width of letterbox system in mm	External dimension 450.0 installation dimension 410.0
Overall height in mm	1700,0
Total width in mm	Body 490.0 Base plate 580.0
Depth in mm	Korpuss 150.0 Base plate 242.0
Weight in kg	65
Delivery condition	Delivery is assembled

Drawing

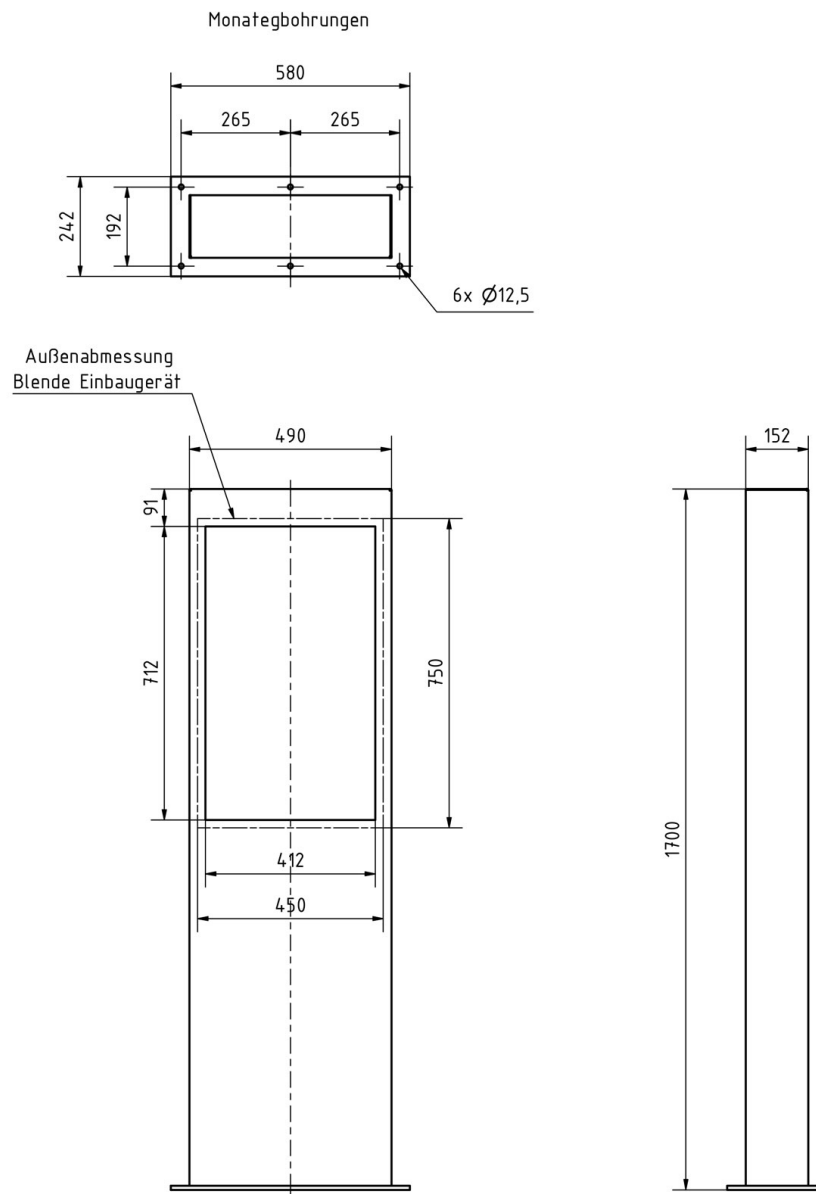

More images

