

# Charging pole Plug BASIC Charge 2 - 22kW/32A - 11kW/16A with 2x type 2 socket | ? RAL of your choice | Height 1300mm

**Product number** 90030-BC2-1300-RAL



## Product description

### Charging pole Plug BASIC Charge 2 - 22kW/32A - 11kW/16A with 2x type 2 socket

The high-quality Plug charging pole with 2x type 2 socket is ideal for areas with high demands on design, functionality and safety. As a multiple solution for demanding car park environments or as a single solution for the home. The simple design blends in harmoniously. The Plug charging pole is equipped with a key switch incl. 2 keys with key number, so access is only possible when the key switch is switched on. The complete charging pole is made of stainless steel V2A 1.4301 and is ground with 240 grain or powder-coated in RAL colour.

Long durability and easy maintenance are guaranteed by the selected materials. The no-frills design and functional construction make the charging pole easy to care for, clean and maintain. BMLsystems also emphasises the highest quality when selecting the right material. The stainless steel material fulfils all conditions in an outstanding manner and has an extremely high corrosion resistance and an always striking surface finish.

Optional labelling with our high-quality laser engraving is possible, so that car park numbers, names or pictograms can be lasered on. Please feel free to ask us about this.

### Simple installation by a specialised electrical company

The Plug charging pole is pre-installed ready for connection. All your electrician has to do is wire the supply line and add the sub-distribution board and you can start charging straight away. Thanks to its solid construction, the charging pole is ideally protected against vandalism and, should something be destroyed, you can simply replace the defective components. The Plug charging pole is very easy to access thanks to the inspection flap at the rear and is extremely simple to install and maintain. The modular design means that all components, from the cover to the charging unit, can be replaced at any time.

### The charging system - BASIC Charge 2

With a flexible charging capacity of up to 22kW/32A 3-phase, the BC2 is compatible with all type 2 electric cars. The BC2 is authorised in the Plug charging station using a key switch. Integrated local load management for stand-alone charging solution - distributes the available nominal current between the two charging points. If one charging point is used, 22kW is available; if both are used, 11kW is available in each case.

### Features

- Charging pole for free-standing installation with front panel made of 2mm stainless steel V2A 1.4301.
- Front panel optionally in 240 grain polished or RAL/DB colour of your choice.
- Quality production - Made in Germany - BMLsystems.
- With key switch: holiday configuration, so when switched on the key can be removed and always charged.
- Status display with LED indicator light.
- Integrated BC2 charging system for fast charging with 22 kW (up to 10 times faster than a normal household socket).
- Charging time approx. 60 minutes (depending on battery capacity and charging power of the electric vehicle)\*.
- High-quality AC charging system - Made in Germany - Phoenix Contact (CHARX) integrated.
- Local load management - distributes the available nominal current between the two charging points.
- Includes printed installation instructions, operating instructions and declaration of conformity.
- High degree of protection and therefore usable in any weather situation (protection class IP54).
- Integrated AC/DC residual current detection.
- The fully welded charging pole is made of 2 mm stainless steel V2A 1.4301.
- Invisible cable feed through the body.
- Rear inspection flap with ventilation openings.

**\*Based on the maximum output power, an average expected battery capacity of 20 kWh and a charger in the vehicle corresponding to the maximum output power.**

### Dimensions

- Steel dimensions: H 1300 mm x W 290 mm x D 182 mm.
- Base plate dimensions: H 10 mm x W 380 mm x D 272 mm.
- Weight: approx. 55 kg.

### Important information

**Please note that professional installation by an electrician is required to use the wallbox included.**


## Product properties

<b>Protective device</b>	AC/DC-Fehlerstrom 30mA/6mA, RCD type B
<b>Surface/colour</b>	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
<b>Access control</b>	Key switch
<b>Energy meter</b>	w/o
<b>Internet connection</b>	LAN
<b>Charging connection</b>	Type 2 socket
<b>Load switch</b>	Installation contactor, 4-pin, 25 A
<b>Integrated functions</b>	Monitoring, Load management
<b>Nominal frequency</b>	50 / 60 Hz
<b>Mounting type</b>	Free-standing
<b>Operating mode</b>	Client, Server, Stand-Alone
<b>Material</b>	Stainless steel V2A 1.4301
<b>Overvoltage category</b>	III
<b>Protocols</b>	HTTPS, HTTP, OCPP 1.6J, Modbus TCP, MQTT
<b>Storage ambient temperature</b>	-35 °C bis +70 °C
<b>Phases</b>	3
<b>Charging mode</b>	Mode 3
<b>Protection type</b>	IP54
<b>Operating ambient temperature</b>	-25 °C bis +40 °C
<b>Interfaces</b>	Ethernet, RS-485 (energy meter, RFID reader), USB-C
<b>Nominal voltage</b>	220 ... 240 V / 380 ... 415 V
<b>Max. charging power</b>	11kW, 22kW
<b>Charge controller</b>	AC charging control CHARX by Phoenix Contact
<b>Protection class</b>	I
<b>Nominal current</b>	16A
<b>Charging standard</b>	IEC 61851-1

## Dimensions

<b>Overall height in mm</b>	1300,0
<b>Total width in mm</b>	290.0 (footplate 380.0)
<b>Depth in mm</b>	182.0 (foot plate 272.0)
<b>Weight in kg</b>	55
<b>Delivery condition</b>	Supplied fully assembled

## Drawing

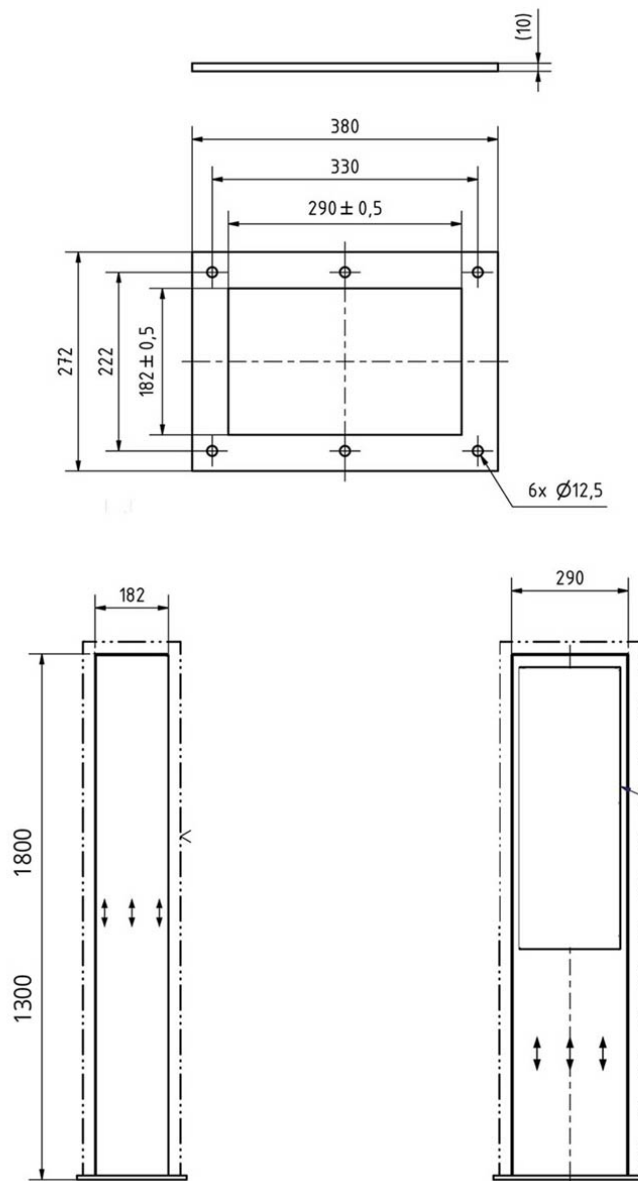

## More images

